

ALICLAD MAX



= HORIZONTAL =
ALPHA RAIL

high performance aluminium
weatherboard system



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

The Building Agency is the exclusive distributor of a cultivated selection of well-respected brand name cladding and roofing products and systems.

The Building Agency's focus is to ensure correct and comprehensive selections from our product and system ranges and to assist with design, specification and delivery of high performance buildings.

The Building Agency introduces our newly developed - AliClad Max System

Performance and aesthetics find a perfect balance in the latest contemporary aluminium cladding system designed in Australia for our local conditions.

The tough Australia climate calls for exterior products that can perform in all weather conditions, meet the most stringent code and standards, and bring elegance and architectural integrity.

AliClad Max System, designed by The Building Agency, is a premium aluminium weatherboard system that has had every detail and feature designed, tuned and resolved. Backed by decades of local experience and international product knowledge, AliClad Max System offers architects, builders and developers a robust and beautifully finished product, supported on an easy-to-install fixing system engineered to perform.

Designed for large-scale commercial projects with a residential application.
Designed for:

WEATHER-TIGHTNESS: The system has been designed in line with BCA and been tested to AS/S4284:2008.

STRUCTURE: The AliClad Max System is designed for buildings in wind zones from Low to Extra High Wind loadings and engineered to be fixed at maximum span distances for easier application and reduced project costs.

FIRE PROTECTION: Aluminium is defined as non-combustible and when correctly specified the support system forms a limited / non-combustible wall assembly. AliClad Max System is tested for buildings over 25m in total height by a full-scale system fire performance test to BR135 and BS8414.

FINISH AND AESTHETICS: Sublimated woodgrains, Flat and matt powdercoat options, Anodised, Anodised-look paint finishes, and horizontal and vertical profile alignments achieve both classic and contemporary designs with ease.



MATERIALS • SYSTEMS • SOLUTIONS

TABLE OF CONTENTS

AliClad Max - Horizontal - Alpha Rail

Information

AC-H-AR-CP - AliClad Max System Compliance Statement
AC-H-AR-Apx.A.T2 - AliClad Max System Appendix A - Table 2 - Fixing
Span Table

Profiles & Accessories

AC-H-AR-PL - AliClad Max System Parts List
AC-H-AR-PRO-01 - AliClad Max System Cladding Profiles
AC-H-AR-PRO-02 - AliClad Max System Trims Profiles
AC-H-AR-MDS - AliClad Max System Mechanical Drainage System Parts

General Processing

AC-H-AR-GP-01 - Cut Board Terminations

TYPICAL DETAILS

1. CORNERS

- 1.1. External Corner
- 1.2. Internal Corner
- 1.3. External Corner - Smaller Cladding Type
- 1.4. Internal Corner - Smaller Cladding Type

2. VERTICAL JOINTS

- 2.1. Vertical Joint Typical
- 2.2. Vertical Joint Orientation Change
- 2.3. Vertical Joint Smaller Cladding Type
- 2.4. Vertical Joint Larger Cladding Type

3. HORIZONTAL JOINTS

- 3.1. Typical Horizontal Joint
- 3.2. Interstorey Joint

4. CLADDING TOP & BOTTOM

- 4.1. Top of Cladding/Parapet
- 4.2. Bottom of Cladding at Ground
- 4.4. Bottom of Cladding at Apron Roof
- 4.8. Barge to Soffit

5. SOFFITS

- 5.1. Wall Below Soffit <90°
- 5.2. Wall Above Soffit <90°
- 5.6. Wall Below Flat Sheet Soffit <90°
- 5.8. Wall Below Flat Sheet Soffit >90°

7. JOINERY

- 7.1. Residential Window Jamb - Recessed
- 7.2. Residential Window Head - Recessed
- 7.3. Residential Window Sill - Recessed
- 7.4. Residential Window Jamb - WNZ/Supported
- 7.5. Residential Window Head - WNZ/Supported
- 7.6. Residential Window Sill - WNZ/Supported

Detail List

Detail Number

AC-H-AR-DL.2

Version

JAN 2024 [v1.4]

appendix a - span tables


Table 4: Horizontally Aligned - Installed on AlphaRail20

WIND ZONE	ALICLAD MAX TYPE				
	V136	V200	150	200	S125/75
	MAXIMUM ALLOWABLE SPAN (mm)				
LOW 00m/s-32m/s <0.6kPa	1200	1200	1200	1200	1200
MEDIUM 32m/s-37m/s >0.66kPa & <0.88kPa	900	800	800	800	800
HIGH 37m/s-44m/s >0.88kPa & <1.25kPa	600	600	600	600	600
VERY HIGH 44m/s-50m/s >1.25kPa & <1.61kPa	500	400	400	400	400
EXTRA HIGH 50m/s-55m/s >1.61kPa & <1.9kPa	400	400	400	400	400
SPECIFIC ENGINEERING DESIGN >55m/s >1.9kPa	SED	SED	SED	SED	SED

1. C4 Evo TBS680 Flange Head Screw TX30 (≥ 45mm minimum embedment, Ø4mm Pre-drill, 3*D Edge Distance)
2. AlphaRail20 - 20mm Aluminium cavity battens, fixed at every stud at 600mm o/c
3. Wind Zone Classifications - ULS, considered in Positive(+) Pressure and Negative(-) Suction

*** Design Assumptions:**

- The wind pressures are for external wind only. Internal pressures will not be applied to the cladding and assumed to be resisted by the internal lining.
- Load on each panel is uniformly distributed.
- The span/deflection limit for SLS wind load is 250mm for aluminium battens/zincalume top hats and L/175 for the AliClad Max boards, with the serviceability wind load equal to 68% of the ULS wind load.
- SS304 10g x 19mm HexTek SD Screw 10mm Hex (AliClad board to AlphaRail 20/Zincalume tophat).
- Timber is assumed Radiata Pine (Group J4 for withdrawal, group 5 in shear, with a characteristic density in excess of 420kg/m³).
 - Timber studs at 600mm o/c and
 - timber nog/dwangs at 800mm o/c and
- For Edge Distances Framing fixing face thickness is assumed as 45mm

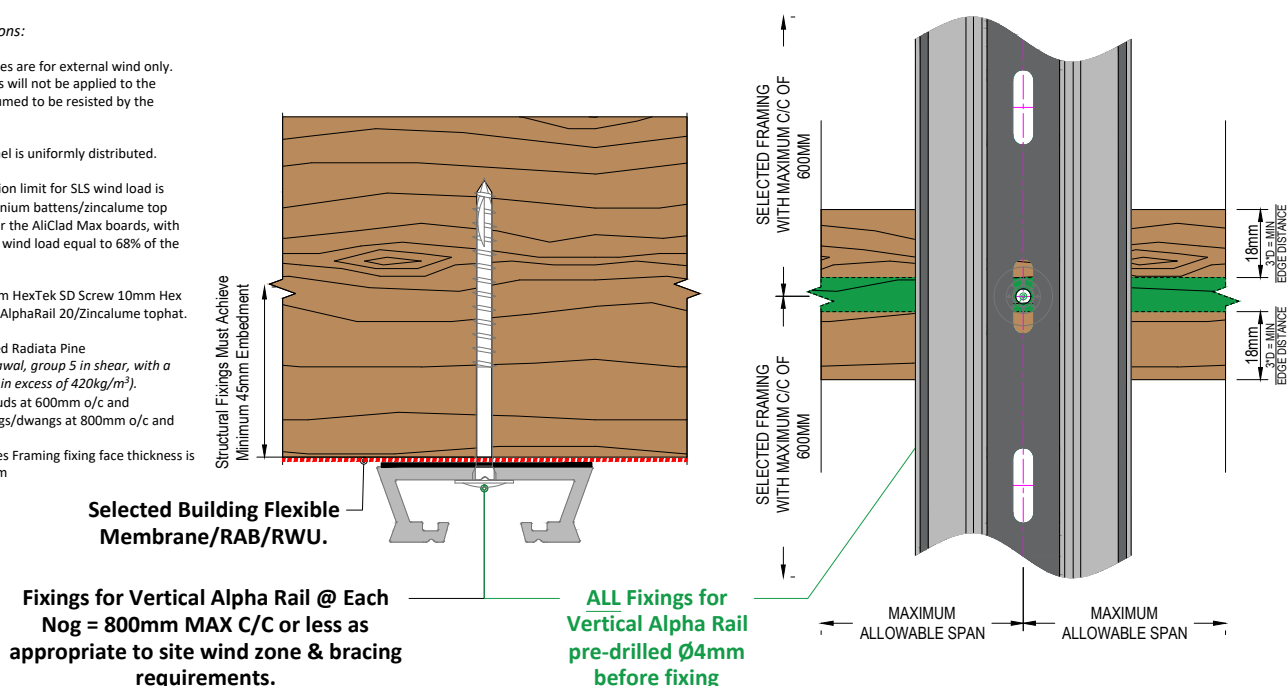

ALICLAD MAX

PARTS LIST

CLADDING PROFILES

- ACV136** - AliClad Max V136, 136x25 V Shiplap Weatherboard, 5.8m.
ACV200 - AliClad Max V200, 200x25 V Shiplap Weatherboard, 5.8m.
ACS150 - AliClad Max S150, 150x25 Shadow Groove Weatherboard, 5.8m.
ACS200 - AliClad Max S200, 200x25 Shadow Groove Weatherboard, 5.8m.
ACS125/75 - AliClad Max S200-125/75, 200x25 Shadow Groove Weatherboard with 75mm & 125mm board look, 5.8m.

2 PIECE BASE CLIPS

- ACHMDB-58** AliClad Max - H Mould Base, 5.8m.
ACJMDB-58 AliClad Max - J-Mould Base, 5.8m.
ACJMDF-58 AliClad Max - J-Mould Face, 5.8m, Selected Finish.
ACINTB-58 AliClad Max - Internal Corner Base, 5.8m, Selected Finish.
ACEXTB-58 AliClad Max - External Corner Base, 5.8m.
ACJMDBC-58 AliClad Max - Bottom of Cladding Base, 5.8m, Selected Finish.

2 PIECE FACES & TRIMS

- ACINTF** - AliClad Max - Internal Corner Face, 5.8m.
ACWNS - AliClad Max - Window Sill Face, - to suit Wanz supported window, 5.8m, Selected Finish.
ACWNSP - AliClad Max - Window Sill Face - to suit Punched Window, 5.8m, Selected Finish.
ACJMDF - AliClad Max - J Mould Face, 5.8m, Selected Finish.
ACHMDF - AliClad Max - H Mould Face, 5.8m, Selected Finish.
ACEXTF - AliClad Max - External Corner Face, 5.8m, Selected Finish.

JUNCTION ELEMENTS

- ACCLZ-58** AliClad Max - Clamp Zed, 5.8m, Selected Finish.
ACCLC-58 AliClad Max - Clamp Channel, 5.8m, Mill Finish.
ACSTR-58 AliClad Max - Starter Rail, 5.8m, Mill Finish.
ACJMC-58 AliClad Max - Jamb Clip, 5.8m, Mill Finish.
ACJMF-58 AliClad Max - Jamb Flashing, 5.8m, Selected Finish.

MECHANICAL DRAINAGE SYSTEM

- ACJMT-01RIGHT** AliClad Max - Type 1a Jamb Tray Right
ACJMT-01LEFT AliClad Max - Type 1b Jamb Tray Left
ACJMT-02RIGHT AliClad Max - Type 2a Jamb Tray Right
ACJMT-02LEFT AliClad Max - Type 2b Jamb Tray Left

ALPHA RAIL SUPPORT SYSTEM PROFILES

- AR-CLIP100** Alpha Rail Packer Clip 10mm, 50mm.
AR-CLIP50 Alpha Rail Packer Clip 5mm, 50mm.
AR-CLIP30 Alpha Rail Packer Clip 3mm, 50mm.
AR-CLIP16 Alpha Rail Packer Clip 1.6mm, 50mm.
AR-RAIL20H Alpha Rail Vertical Rail 20mm, 5.8m.
AR-RAIL20V Alpha Rail Horizontal Rail 20mm, Drained, 5.8m.

ALICLAD MAX

CLADDING PROFILES

HIGH PERFORMANCE ALUMINIUM
WEATHERBOARD SYSTEM

2.1






VI36

V200

SI50

S200

SI25-75

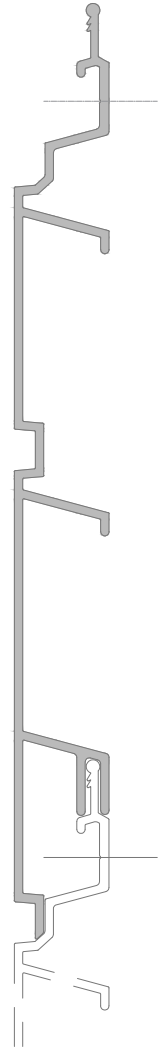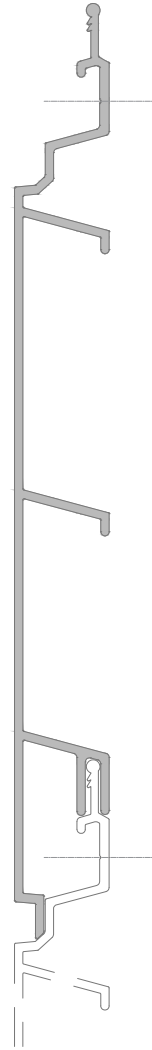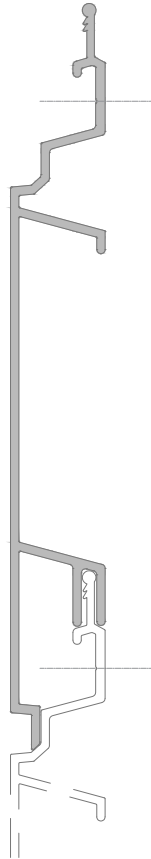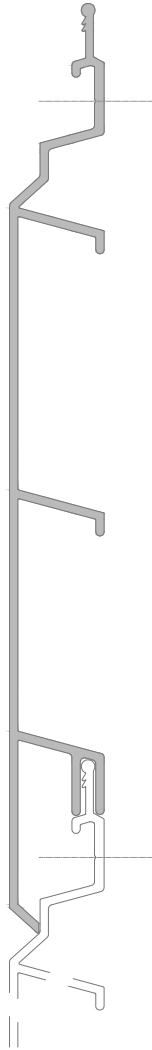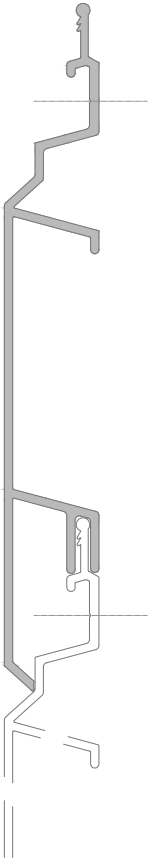

V

≡ - GROOVE

S

□ - GROOVE

Extruded Profiles - Cladding

Detail Number

AC-H-AR-PRO-01

Version

JAN 2024 [v1.5]

**THE
BUILDING
AGENCY**


MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX


TRIMS - PROFILES

TYPICAL ASSEMBLIES


J-MOULD




WANZ WINDOW SILL

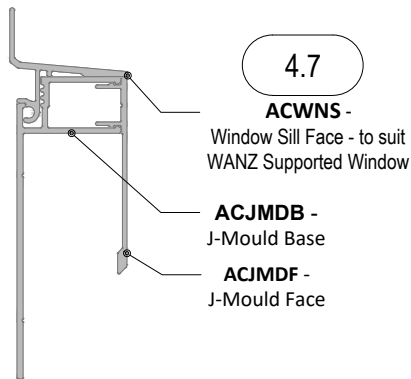


PUNCHED WINDOW SILL

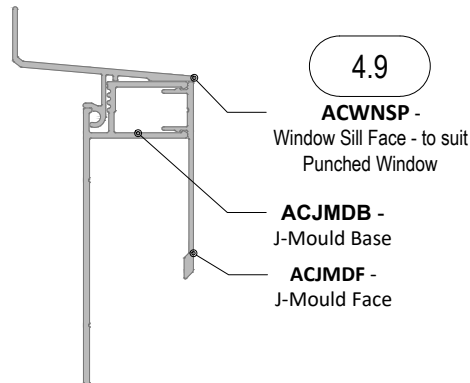


TYPICAL BASE OF CLADDING

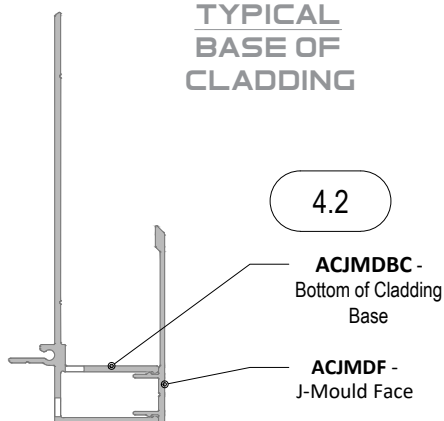


TYPICAL JAMB

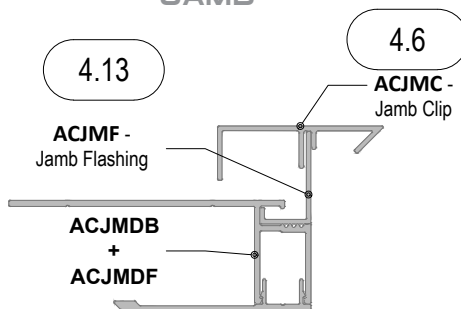


STARTER




ENDER

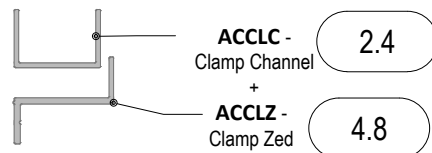


TYPICAL VERTICAL H-JOINT

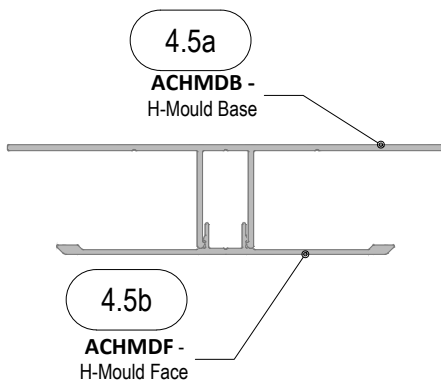

EXTERNAL CORNER

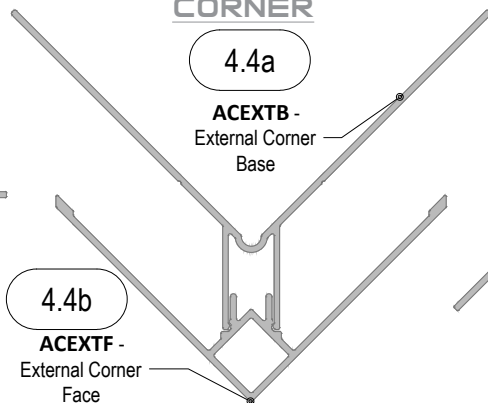

INTERNAL CORNER

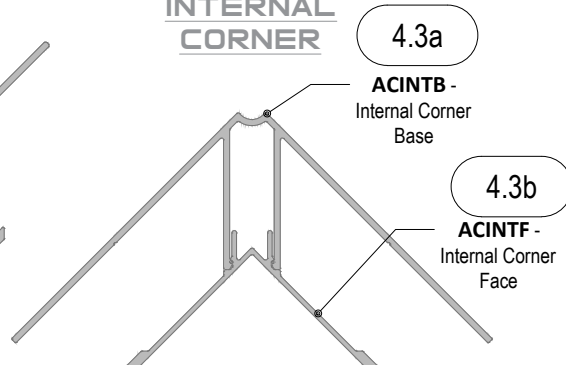

Extruded Profiles - Trims

Detail Number

AC-H-AR-PRO-02

Version

JAN 2024 [v1.5]

**THE
BUILDING
AGENCY**

MATERIALS • SYSTEMS • SOLUTIONS


MECHANICAL DRAINAGE SYSTEM

PROPRIETARY JAMB-TO-SILL DRAINAGE CLIPS

- AVAILABLE IN WHITE, GREY AND BLACK.


TYPE I - FOR WINDOWS USING WANZ BAR SUPPORT

ACJMT-01LEFT -
Type 1 Jamb Tray Left




SECTION

4.11a





PLAN

ACJMT-01RIGHT -
Type 1 Jamb Tray Right




4.11b

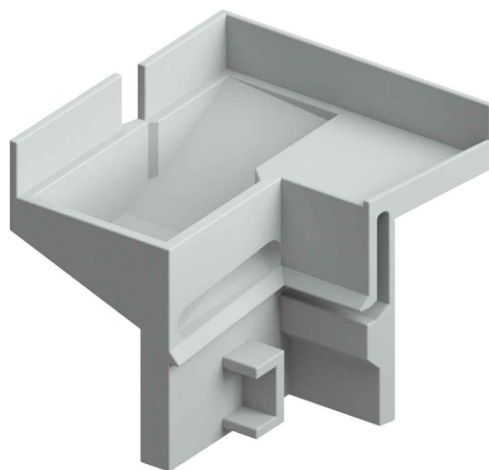


TYPE II - FOR PUNCHED OR RECESSED WINDOWS

ACJMT-02LEFT -
Type 2 Jamb Tray Left




SECTION

4.12b





PLAN

ACJMT-02RIGHT -
Type 2 Jamb Tray Right



4.12a

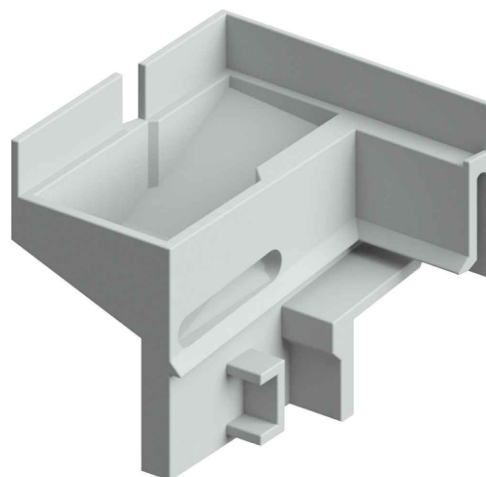

Mechanical Drainage System

Detail Number

AC-V-AR-ACC-01

Version


JAN 2024 [v1.5]

ALICLAD MAX



ALPHA RAIL SYSTEM

HIGH PERFORMANCE
ALUMINIUM BATTEN SYSTEM
PROFILES

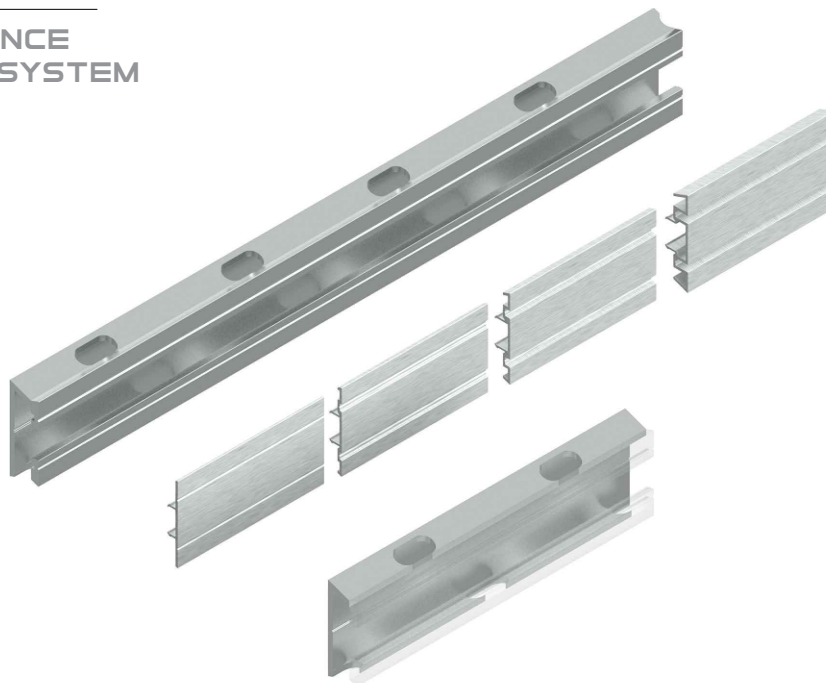

3.1d



ALPHA CLIP 10MM
Order Code: AR-Clip100

3.1c



ALPHA CLIP 5MM
Order Code: AR-Clip50

3.1b



ALPHA CLIP 3MM
Order Code: AR-Clip30

3.1a



ALPHA CLIP 1.6MM
Order Code: AR-Clip16

3.1



ALPHA RAIL 20MM - 5.8LM
Order Code: AR-Rail20V

3.1



ALPHA RAIL 20MM - 5.8LM
Order Code: AR-Rail20H

Alpha Rail System

Detail Number

AC-V-AR-ACC-02

Version

JAN 2024 [v1.5]




THE
BUILDING
AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX


PROCESSING - RIPPED WEATHERBOARD TERMINATION

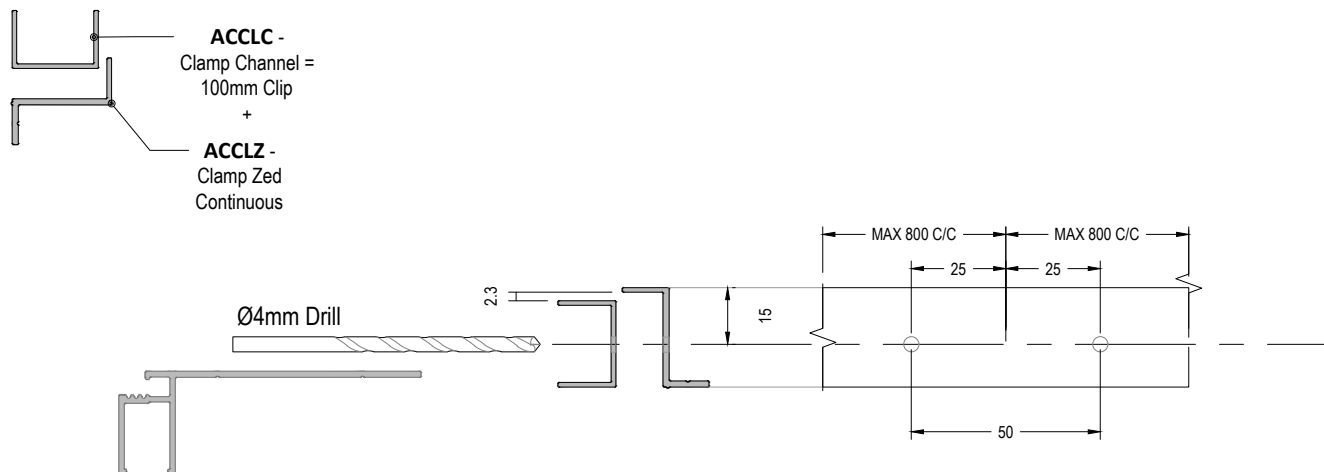

Common location for
termination assembly :
Into J-Moulds or Corner
moulds

ACCLC - Clamp Channel 100mm
Clips Fixed with 2x No4-4 Pop
Rivets to continuous **ACCLZ** at
800mm MAXIMUM centres &
100mm MAX from Ends

**Ripped Board Edge Goes
Here**

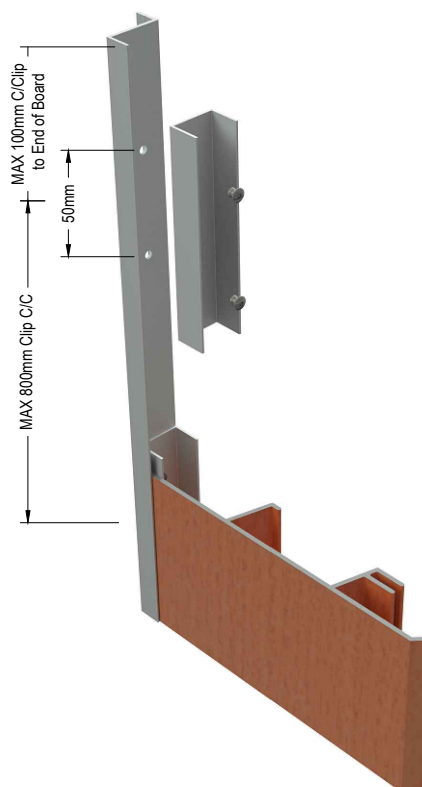

General Processing

Detail Number

AC-GP-1


Version

JAN 2024 [v1.5]

**THE
BUILDING
AGENCY**

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

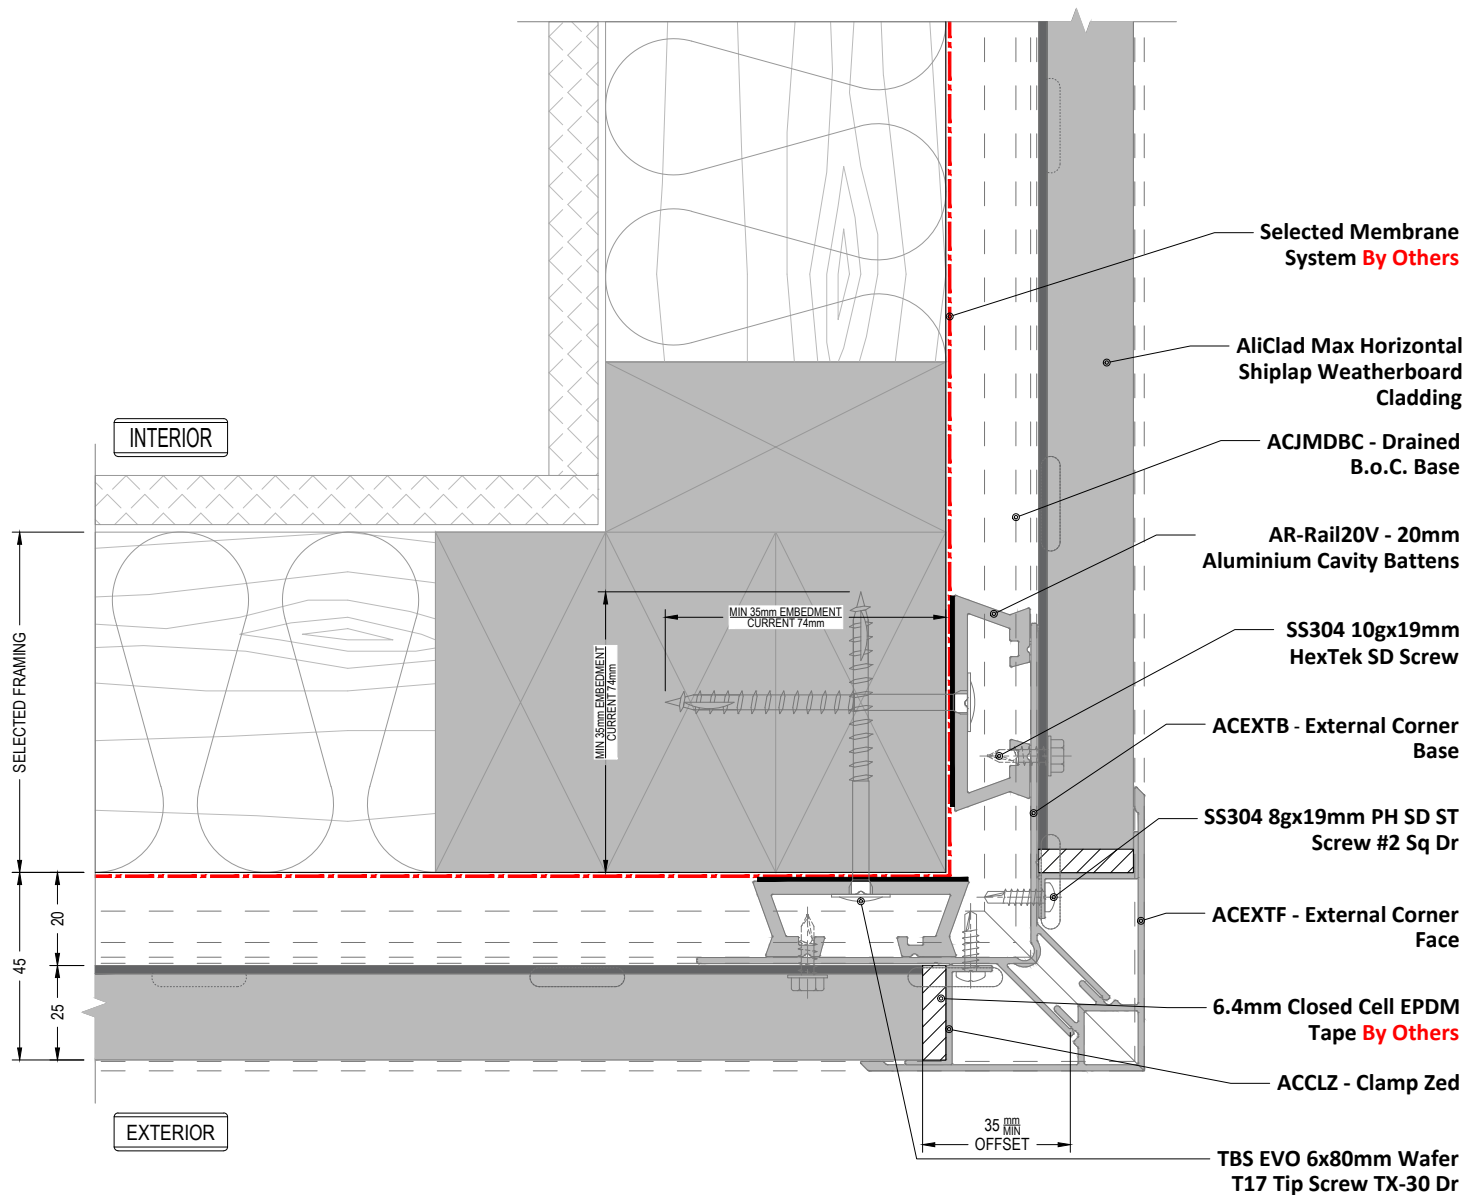

External Corner

Detail Number

AC-H-AR-1.1


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

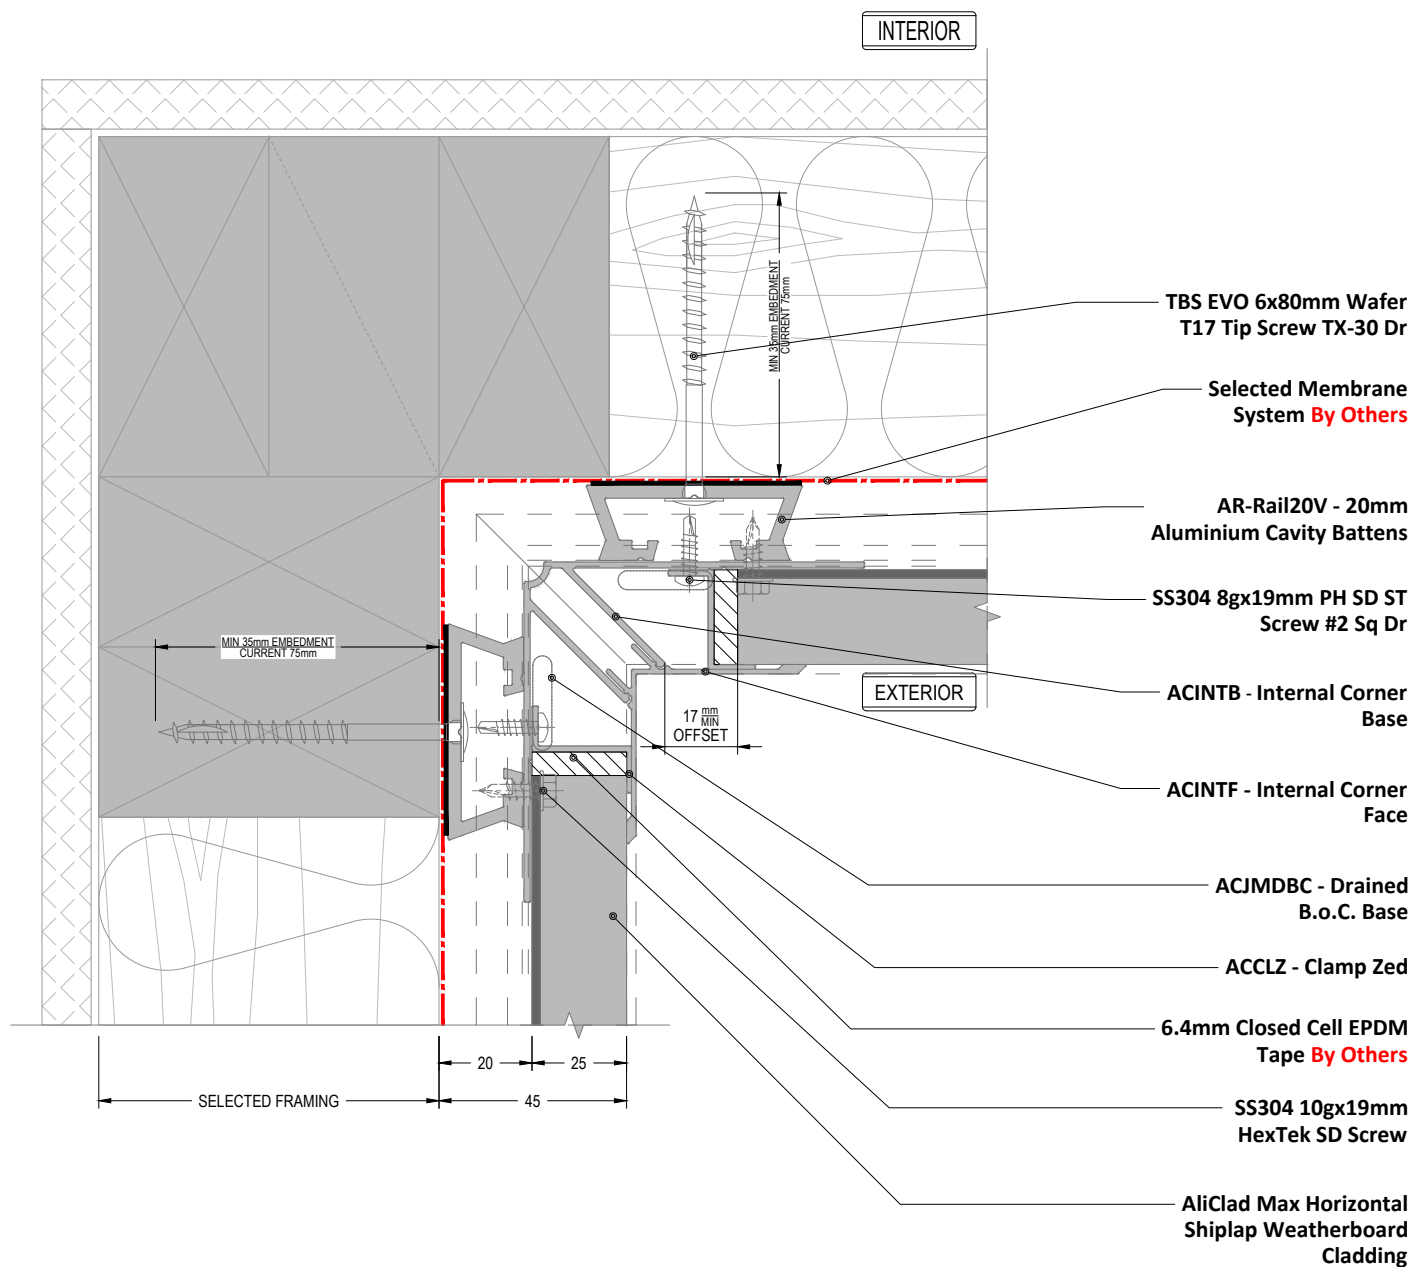

Internal Corner

Detail Number

AC-H-AR-1.2


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

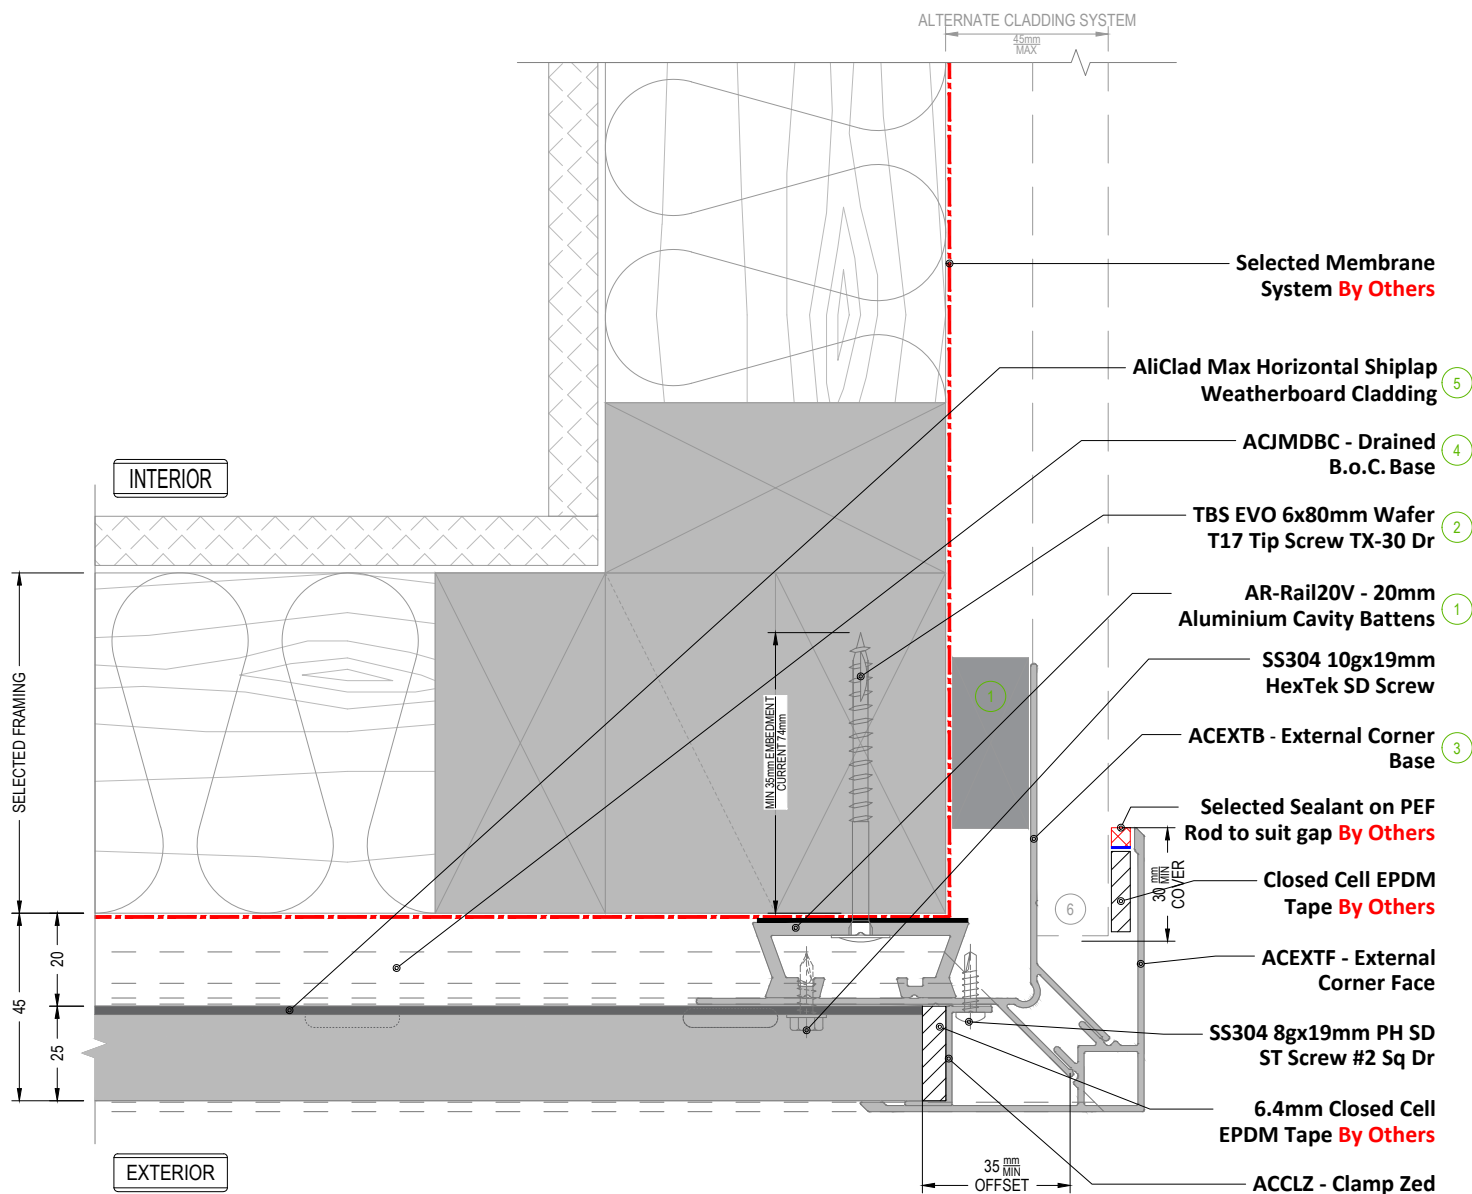

NOTE
ACJMDBC - Drained B.O.C.
Base Shown in dashed lines

SEQUENCE OF INSTALLATION

- | | | | |
|---|--|---|--|
| 1 | AR-Rail20V - 20mm Aluminium Cavity Battens | 1 | Alternate Support Structure |
| 2 | TBS EVO 6x80mm Wafer T17 | 3 | External Corner Base |
| 3 | External Corner Base | 4 | Drained B.O.C Base |
| 4 | Drained B.O.C Base | 5 | AliClad Max Horizontal Shiplap Weatherboard Cladding |
| 5 | AliClad Max Horizontal Shiplap Weatherboard Cladding | 6 | Alternate Cladding Exterior |

Ext Cnr_SML Cladding Type

Detail Number

AC-H-AR-1.3


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

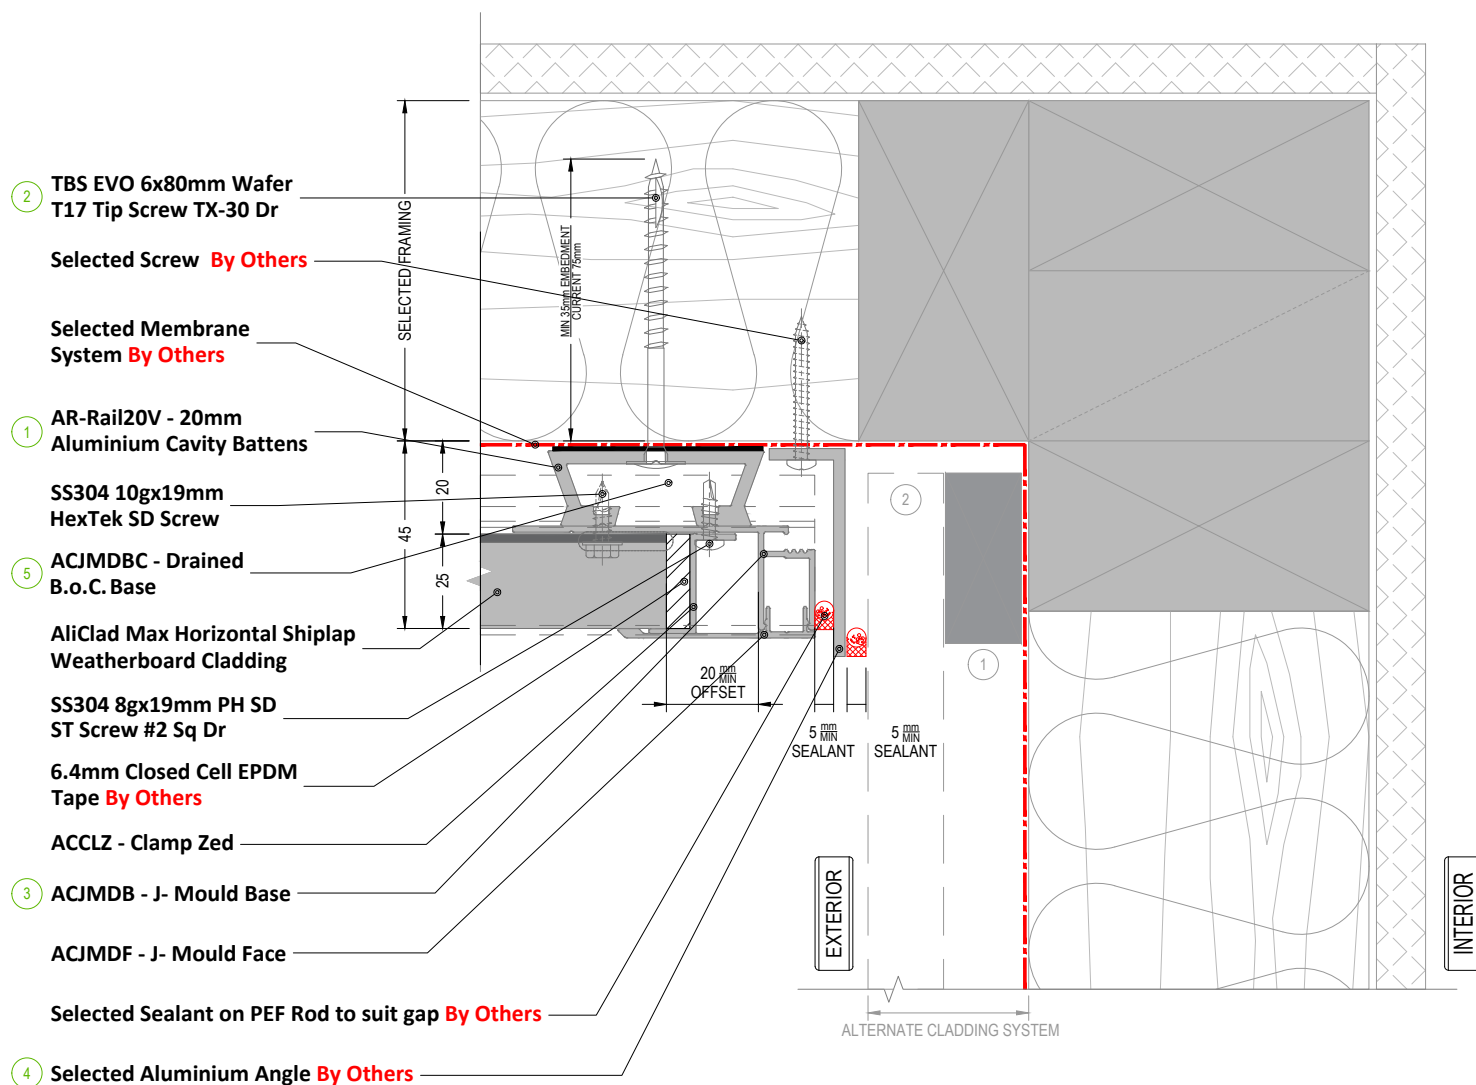

NOTE
ACJMDBC - Drained B.O.C.
Base Shown in dashed lines

NOTE 2
Flashings and Angles are not included in the system

SEQUENCE OF INSTALLATION

- 1 AR-Rail20V - 20mm Aluminium Cavity Battens
- 2 TBS EVO 6x80mm Wafer T17
- 3 ACJMDB - J-Mould Base
- 4 Selected Aluminium Angle **By Others**
- 5 Drained B.O.C Base

Int Cnr_SML Cladding Type

Detail Number

AC-H-AR-1.4


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

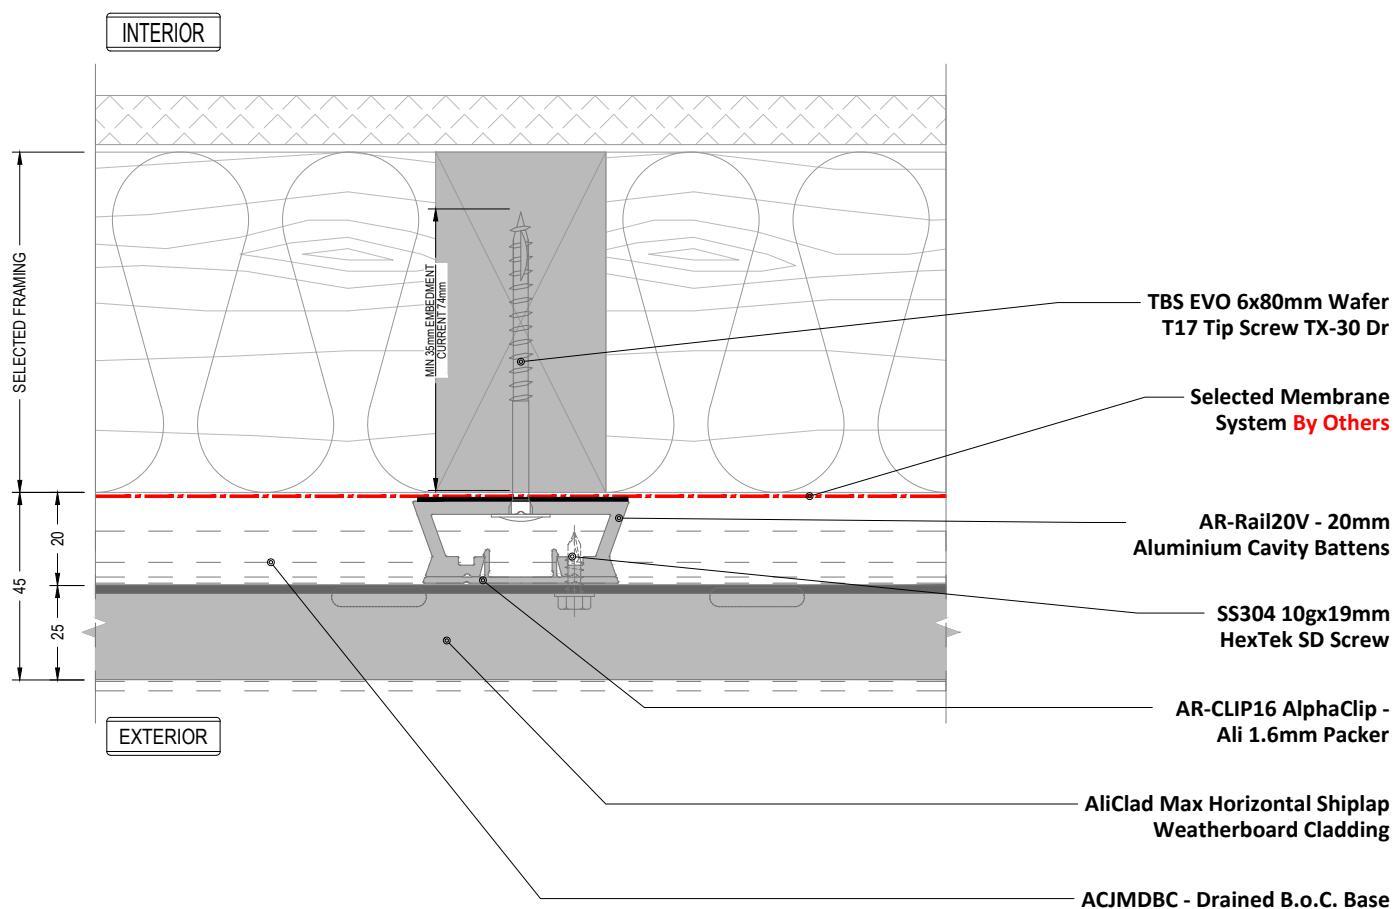

Vertical Joint - Typical

Detail Number

AC-H-AR-2.1


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

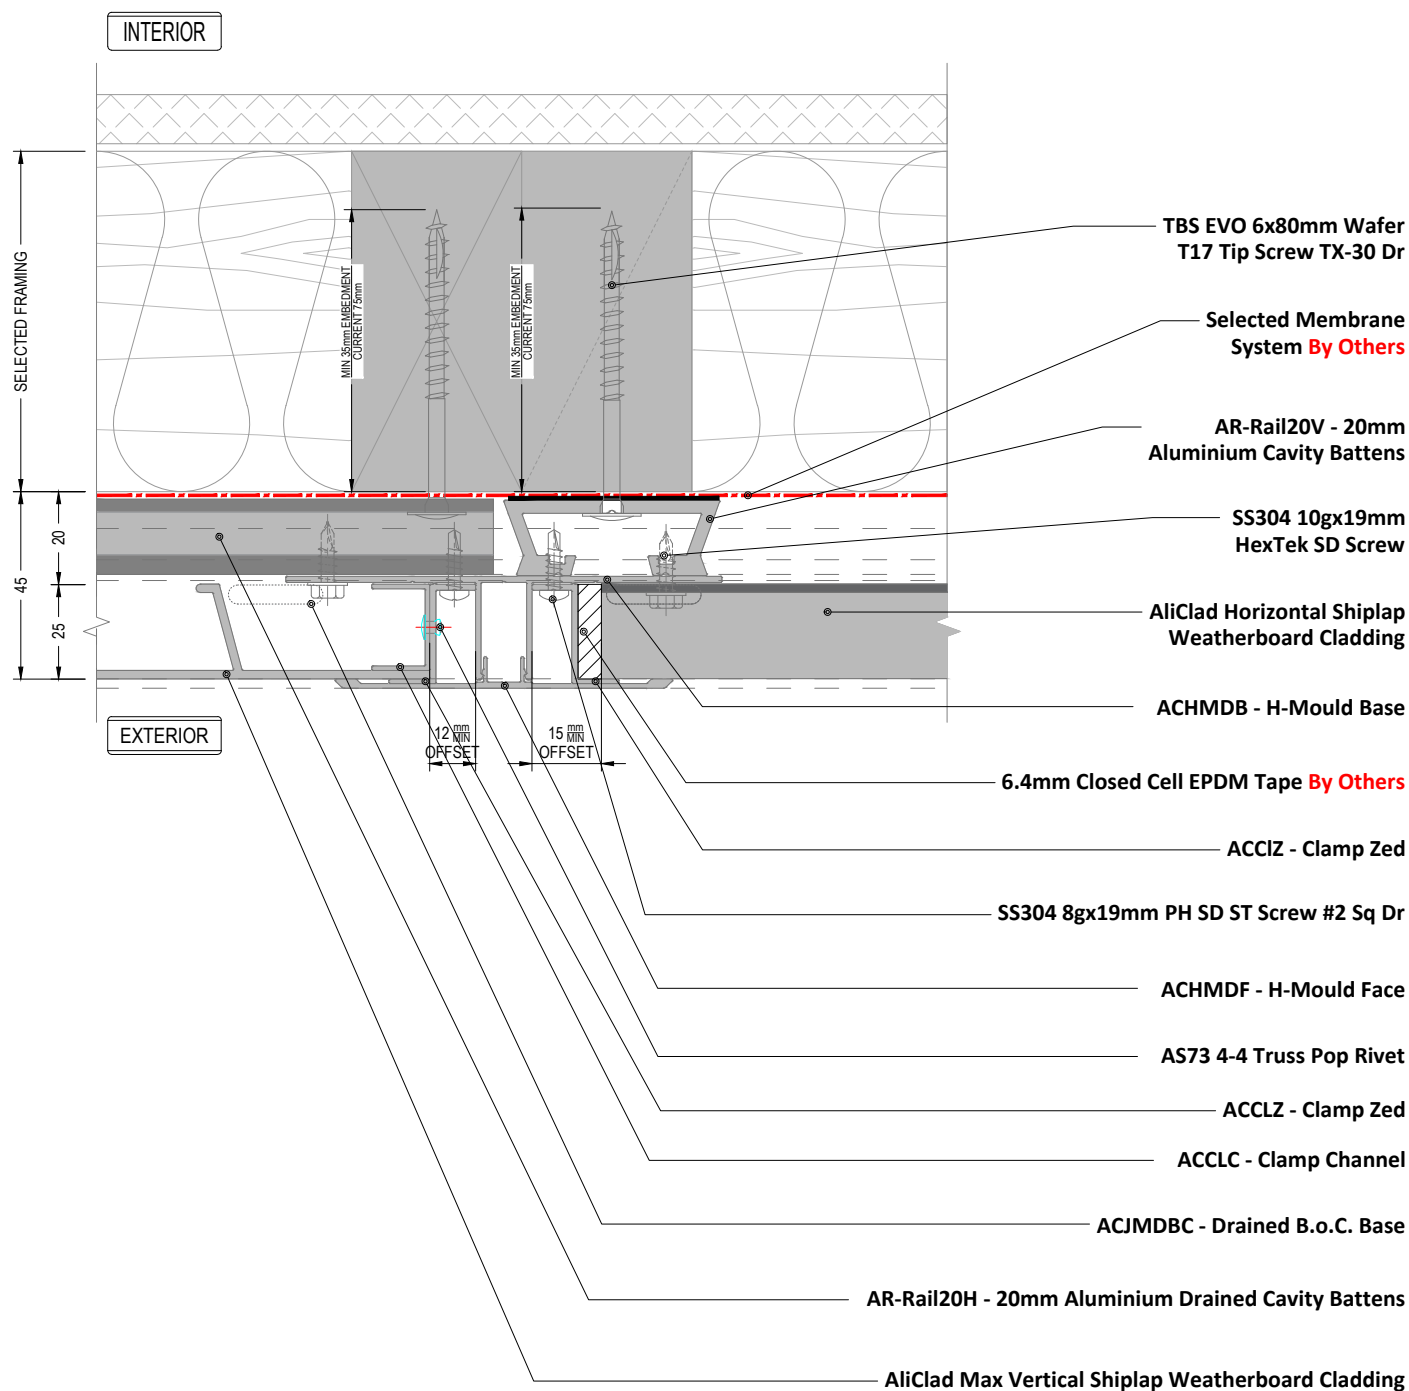

Vert. Joint_Orientation Change

Detail Number

AC-H-AR-2.2


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

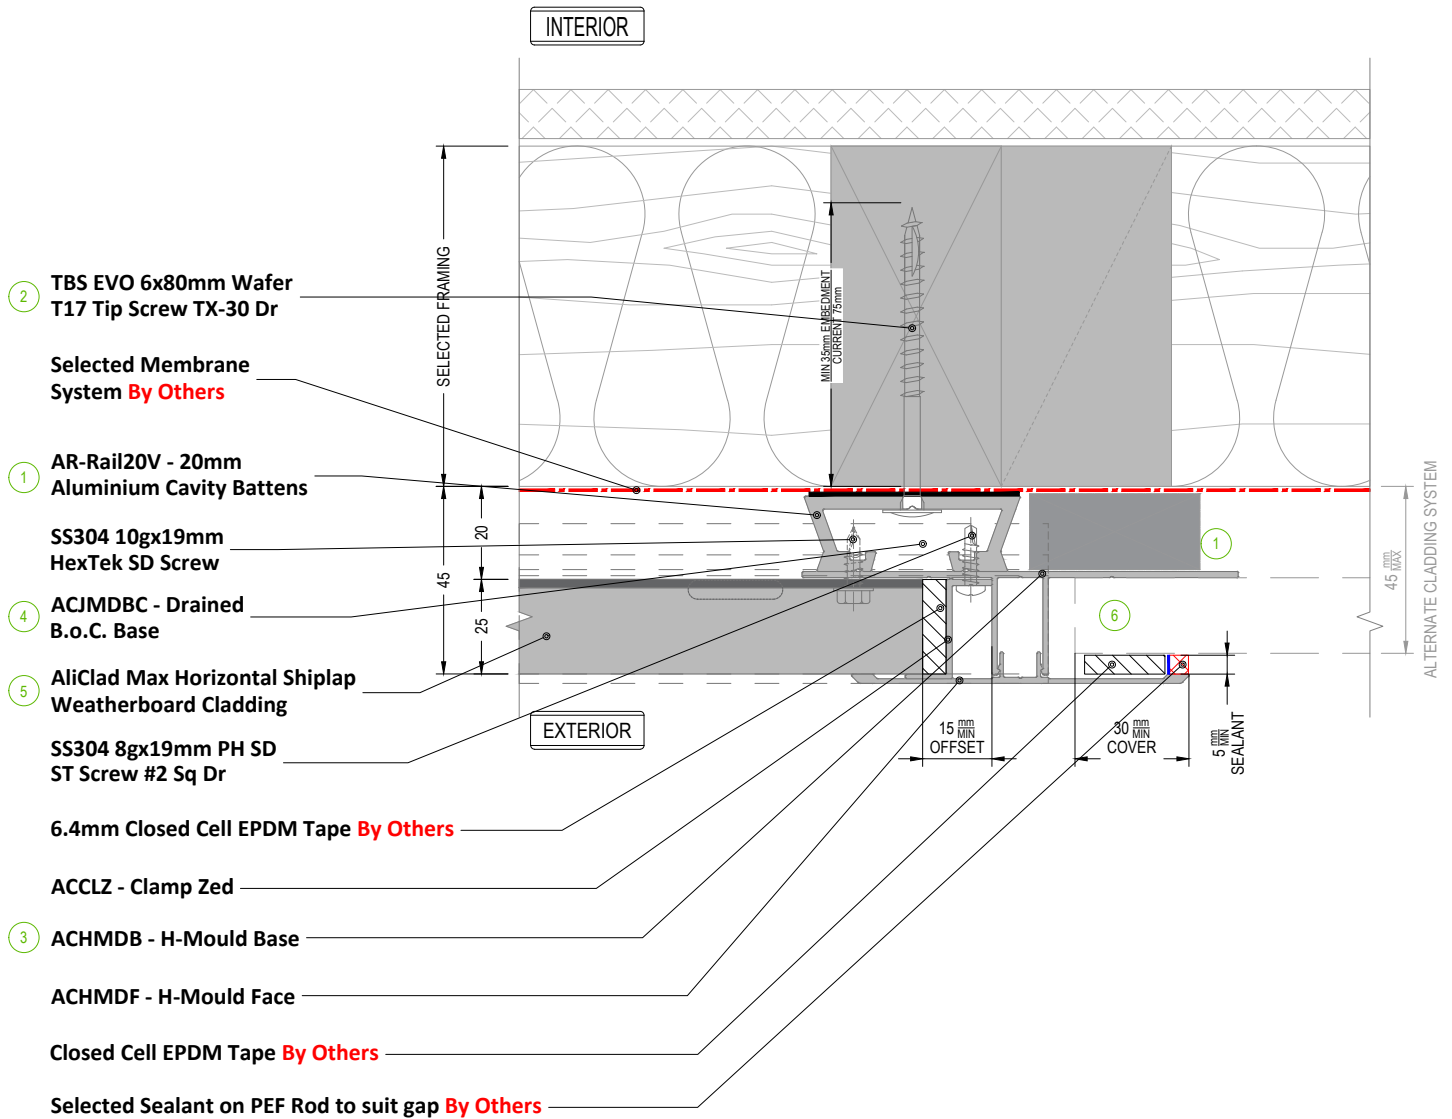

NOTE 1
ACJMDBC - Drained B.O.C.
Base Shown in dashed lines

NOTE 2
Additional Framing is required at junction of
cladding types to ensure adequate fixing

SEQUENCE OF INSTALLATION					
1	AR-Rail20V - 20mm Aluminium Cavity Battens	1	Alternate Support Structure		
2	TBS EVO 6x80mm Wafer T17	3	ACHMDB - H-Mould Base	4	Drained B.O.C Base
5	AliClad Max Horizontal Shiplap Weatherboard Cladding	6	Alternate Cladding Exterior		

Vert. Joint_SML Cladding Type


Detail Number
AC-H-AR-2.3
Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

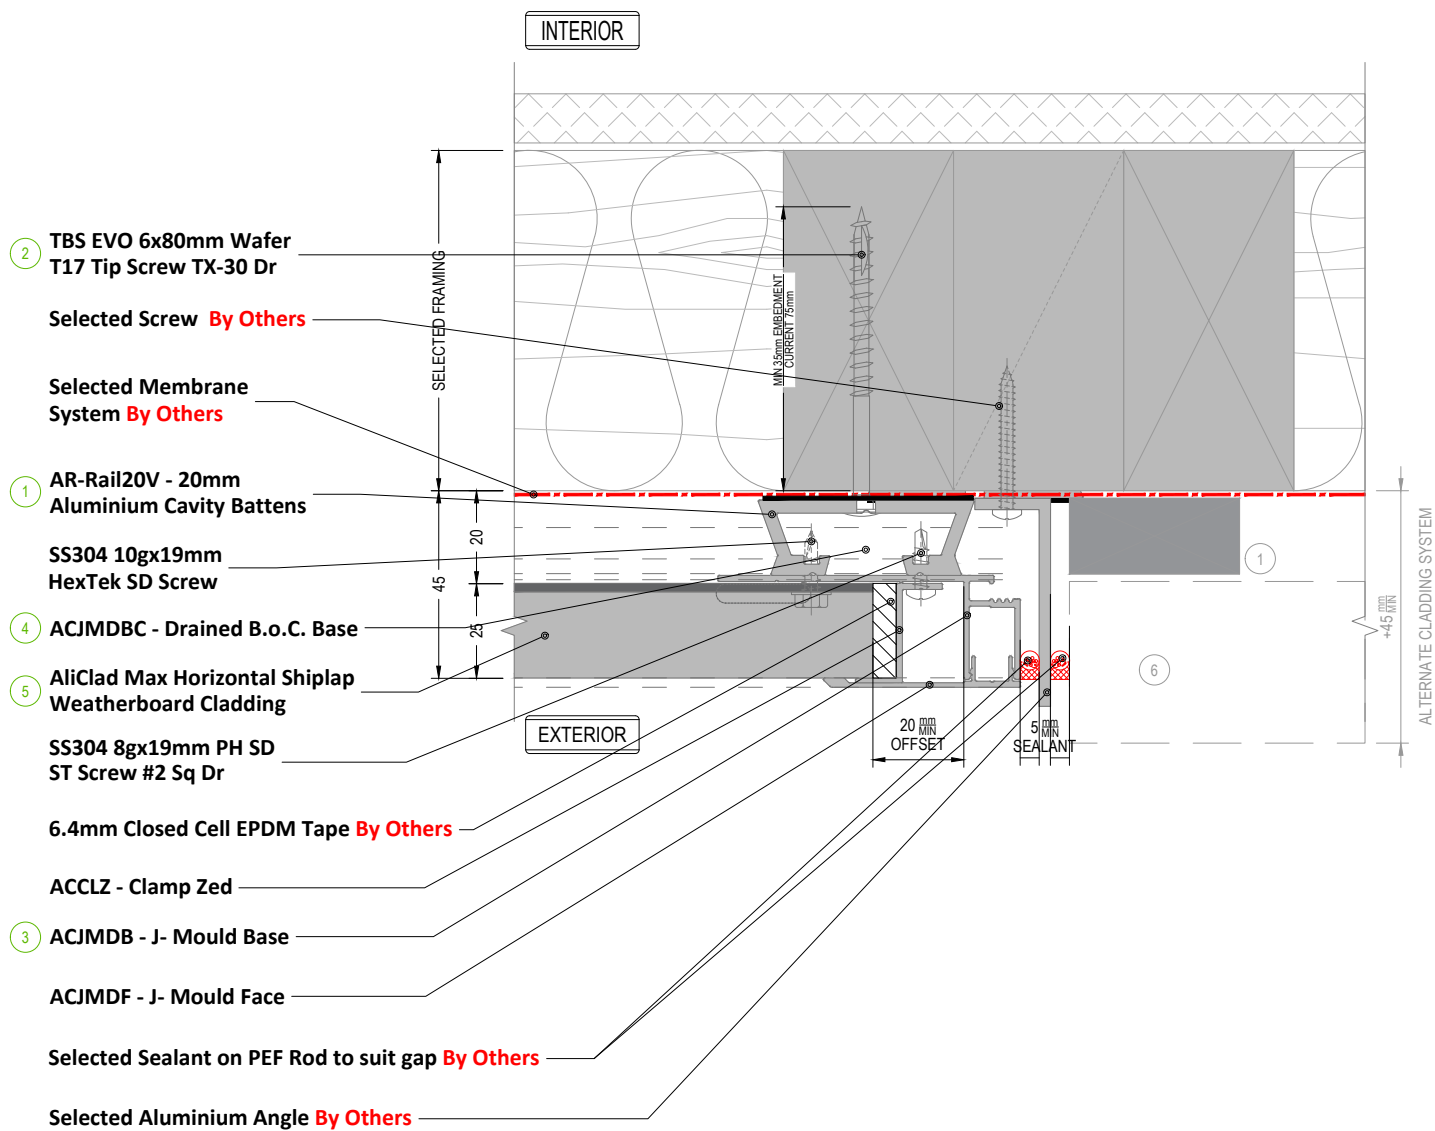

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines
NOTE 2
Additional Framing is required at junction of
cladding types to ensure adequate fixing
NOTE 3
Flashings and Angles are not included in the system

SEQUENCE OF INSTALLATION

- 1 AR-Rail20V - 20mm Aluminium Cavity Battens
- 2 TBS EVO 6x80mm Wafer T17
- 3 ACJMDB - J-Mould Base
- 4 Drained B.O.C Base
- 5 AliClad Max Horizontal Shiplap Weatherboard Cladding
- 6 Alternate Cladding Exterior

Vert. Joint_LRG Cladding Type

Detail Number

AC-H-AR-2.4


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

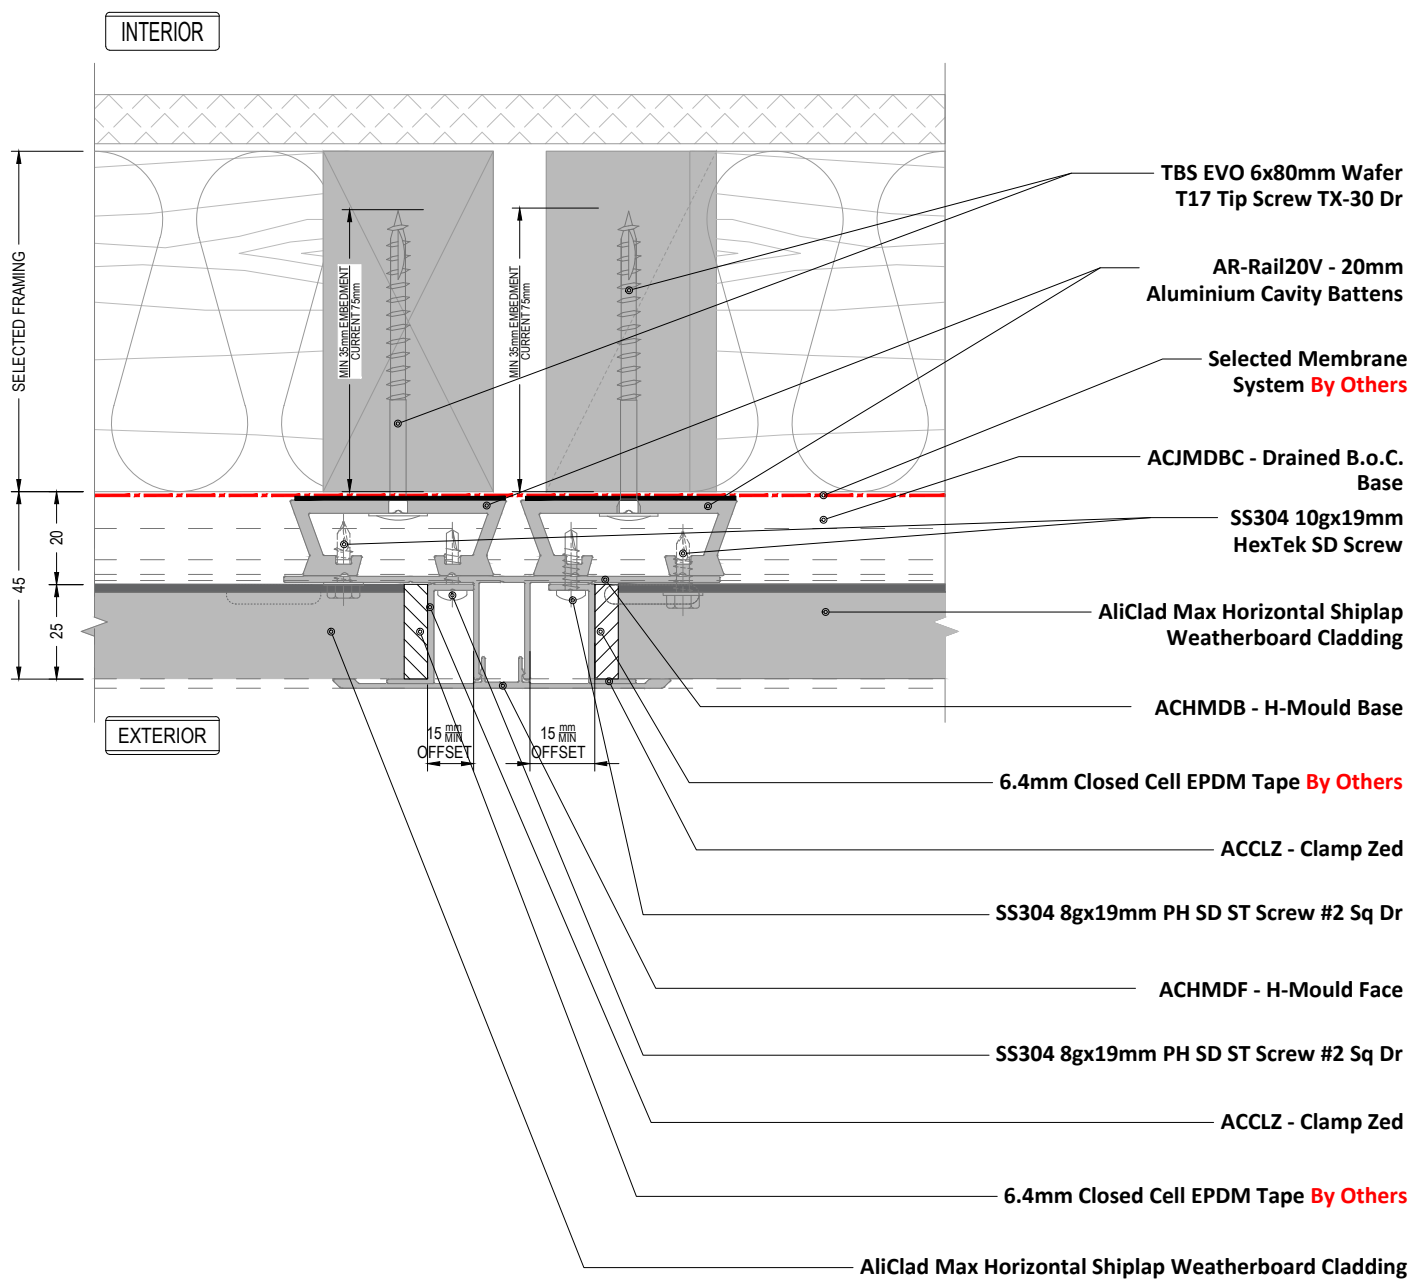

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines

NOTE 2
Additional Framing is required at junction of cladding types to ensure adequate fixing

Vertical Joint - Typical

Detail Number

AC-H-AR-2.5


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

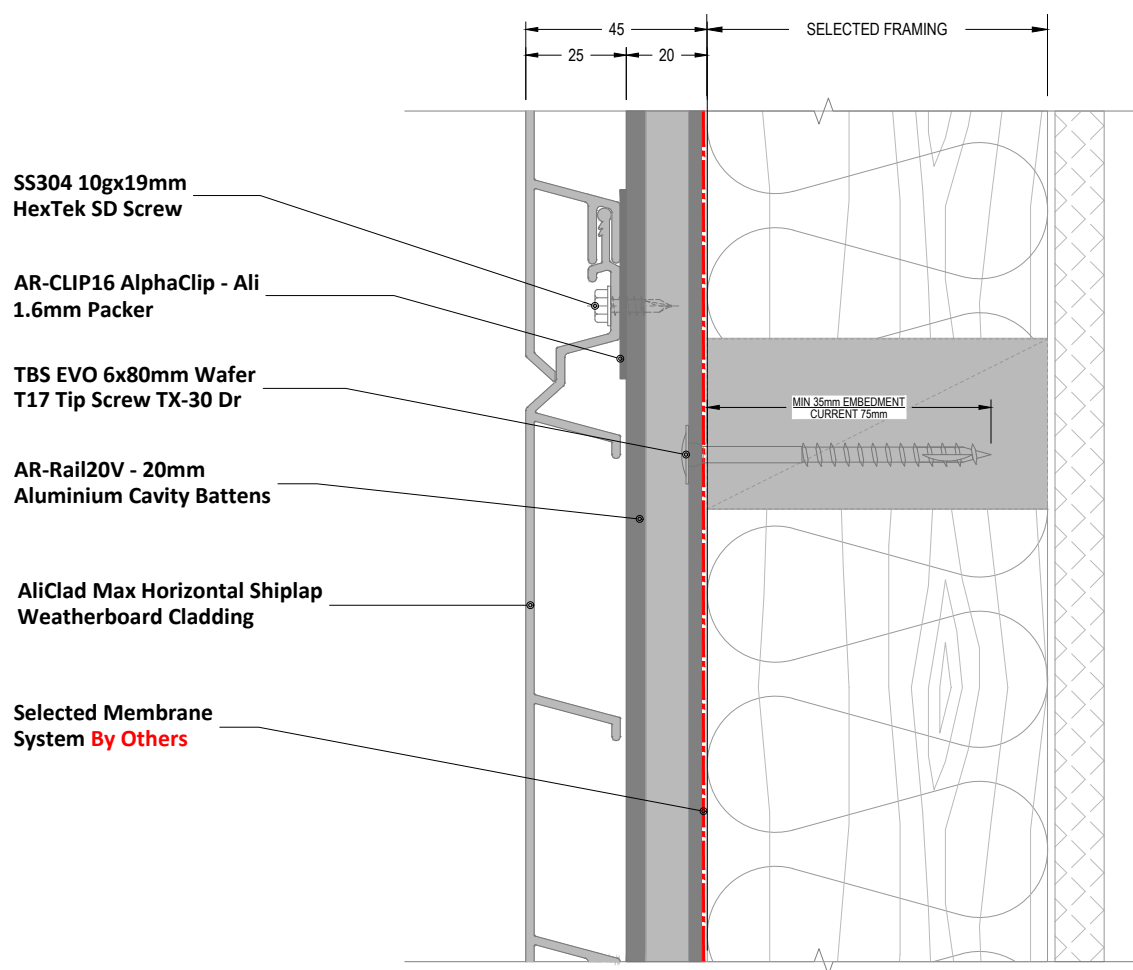

Hori. Joint_Typical

Detail Number

AC-H-AR-3.1


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

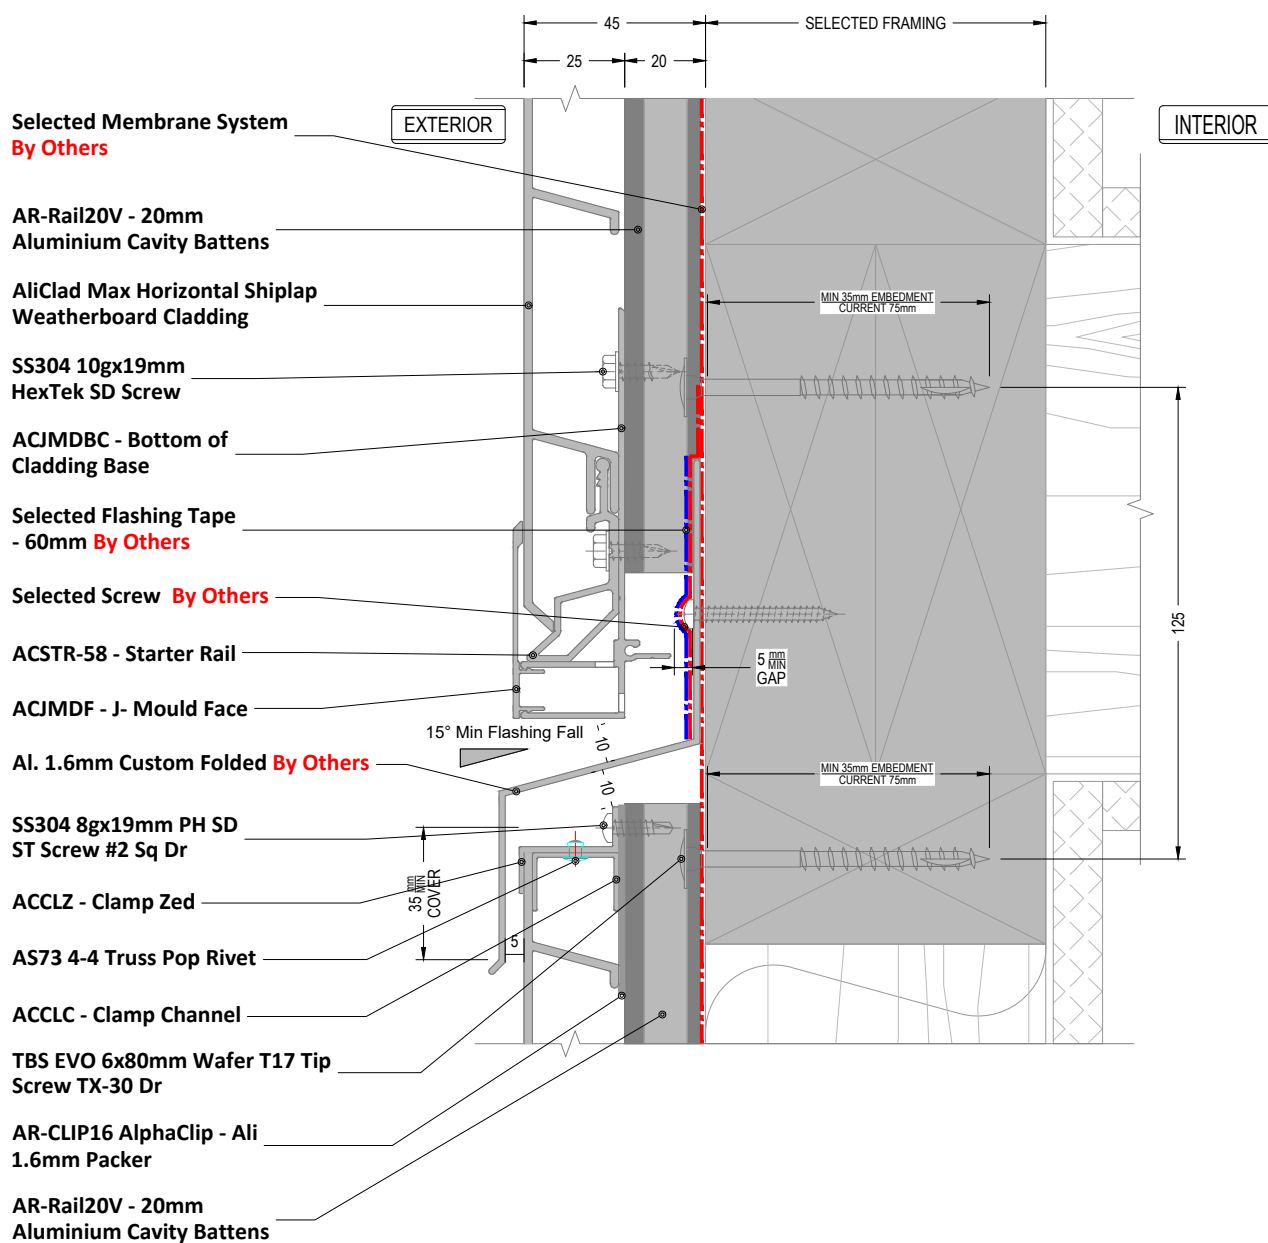

Interstorey Joint

Detail Number

AC-H-AR-3.2


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

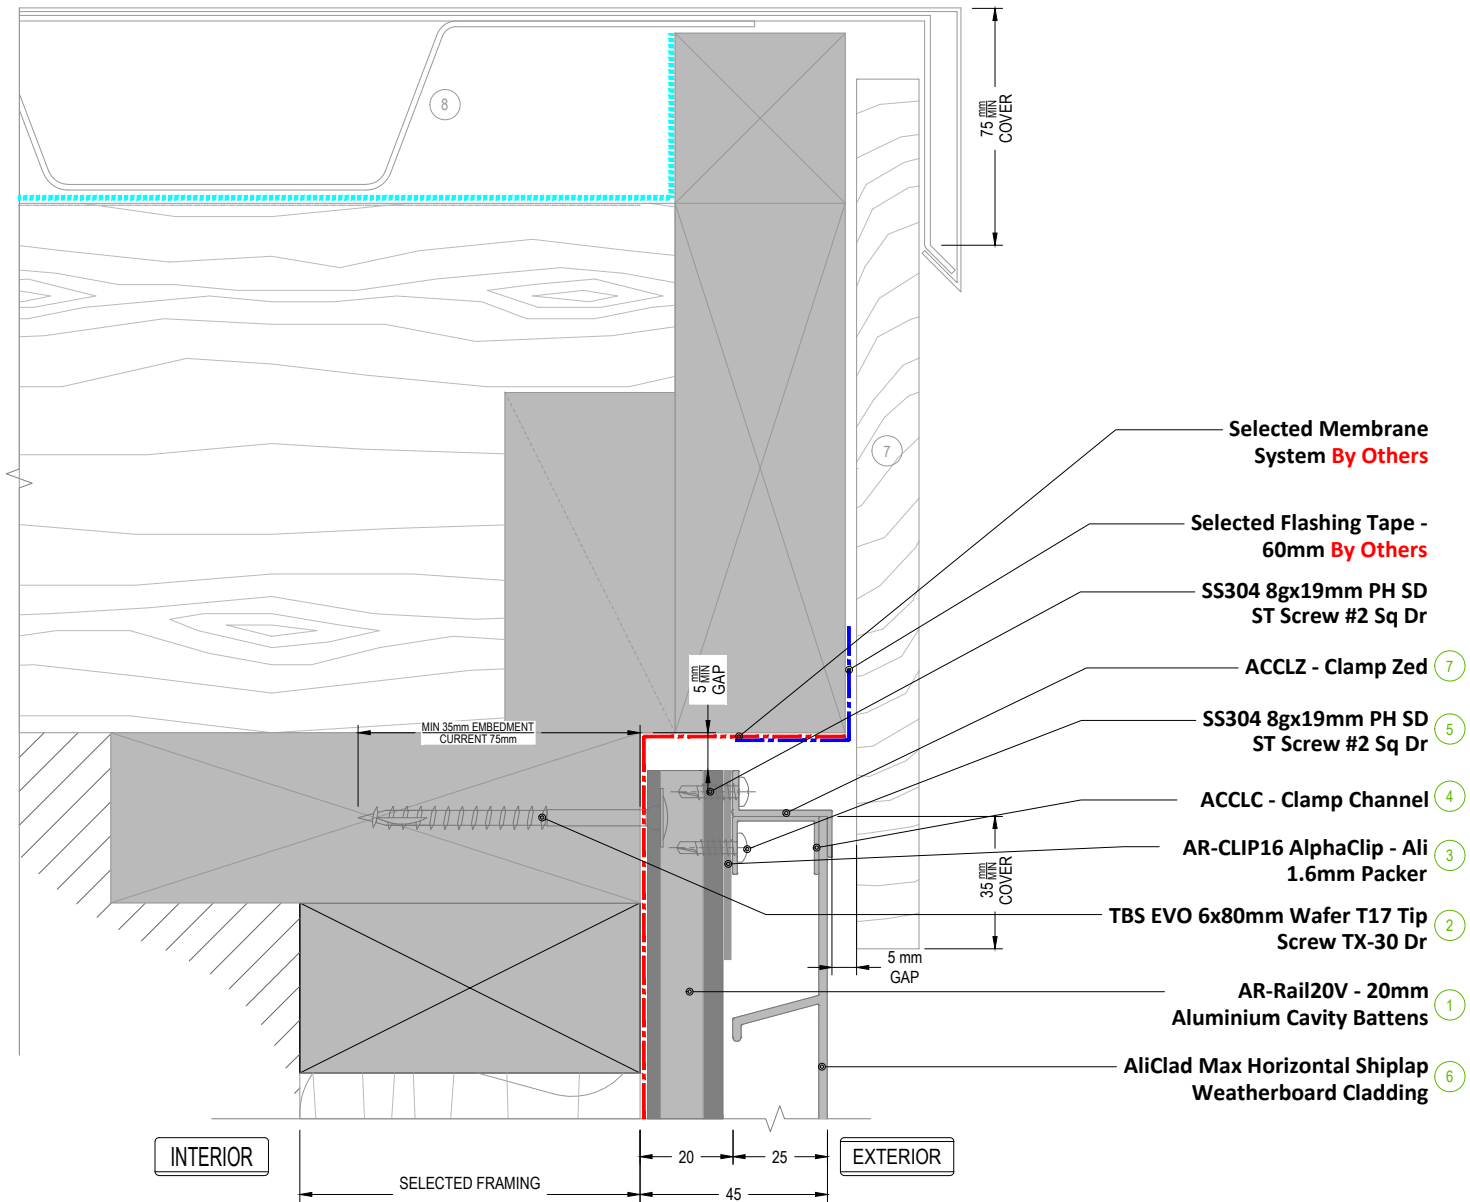

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines
NOTE 2
Additional Framing is required at junction of
cladding types to ensure adequate fixing

SEQUENCE OF INSTALLATION							
1	AR-Rail20V - 20mm Aluminium Cavity Battens	2	TBS EVO 6x80mm Wafer T17	3	AlphaClip - Ali 1.6mm Packer	4	ACCLC - Clamp Channel
5	SS304 8gx19mm PH SD ST Screw	6	AliClad Max Horizontal Shiplap Weatherboard Cladding	7	ACCLZ - Clamp Zed	8	Barge Board
9	Roof System						


TOP Cladding_Parapet

Detail Number
AC-H-AR-4.1
Version
JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

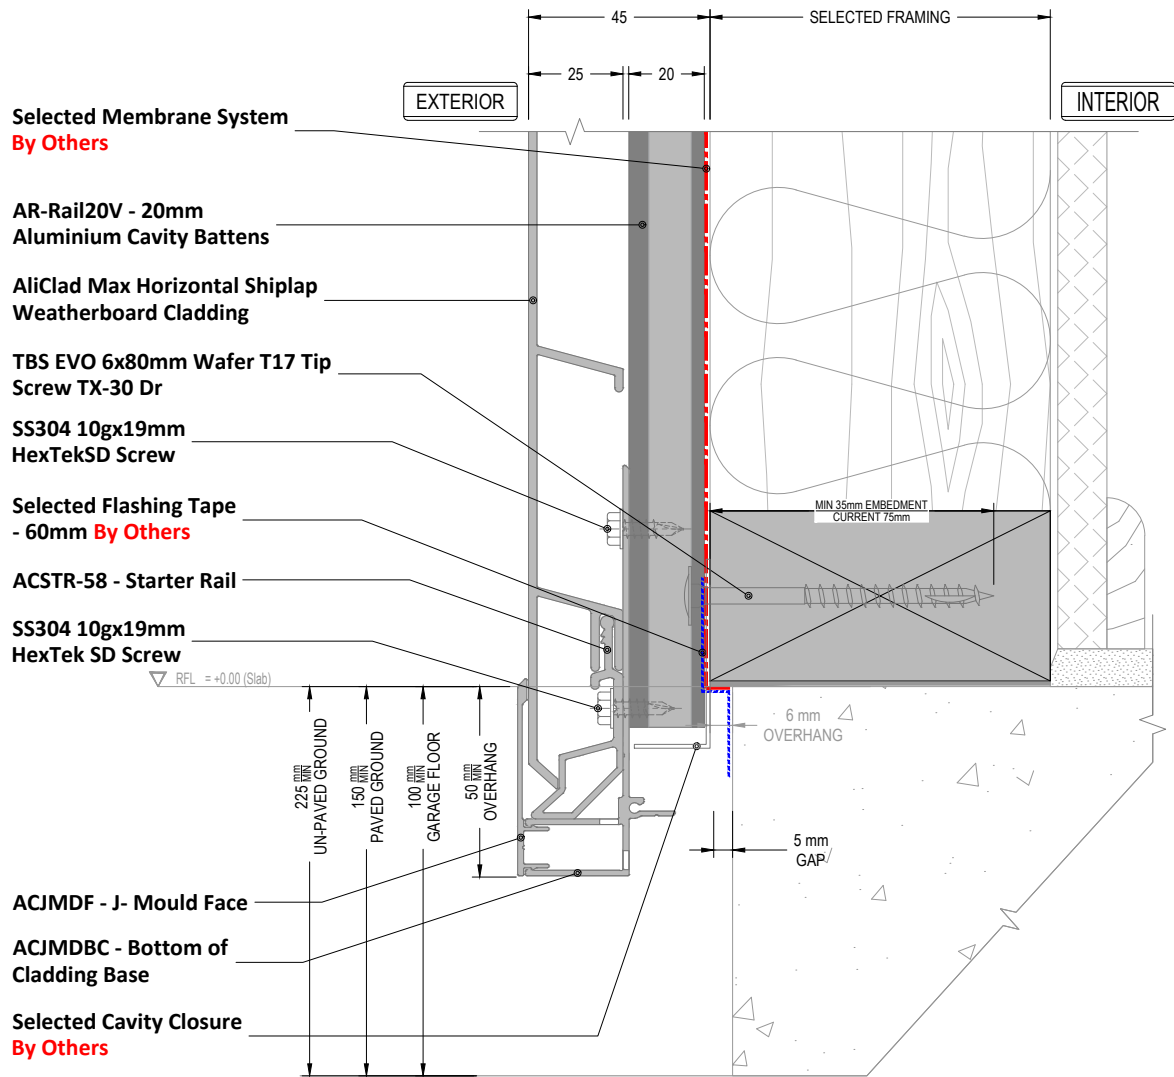

NOTE

Cavity Closure are not included in the system

Detail Number

AC-H-AR-4.2

Version


JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

BTM Cladding_G.L

ALICLAD MAX

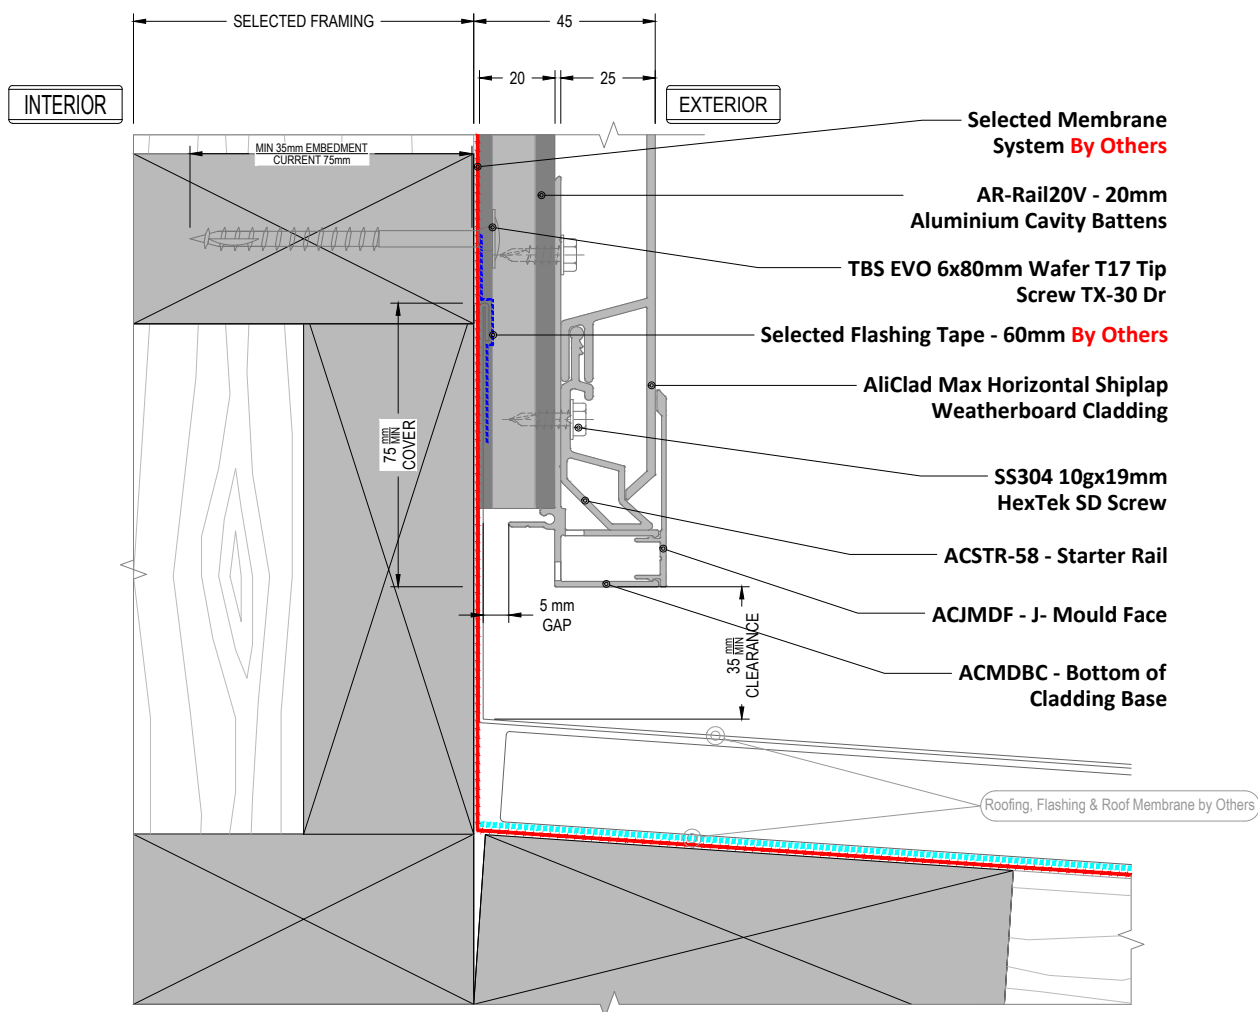

BTM Cladding_ Apron Roof

Detail Number

AC-H-AR-4.4


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

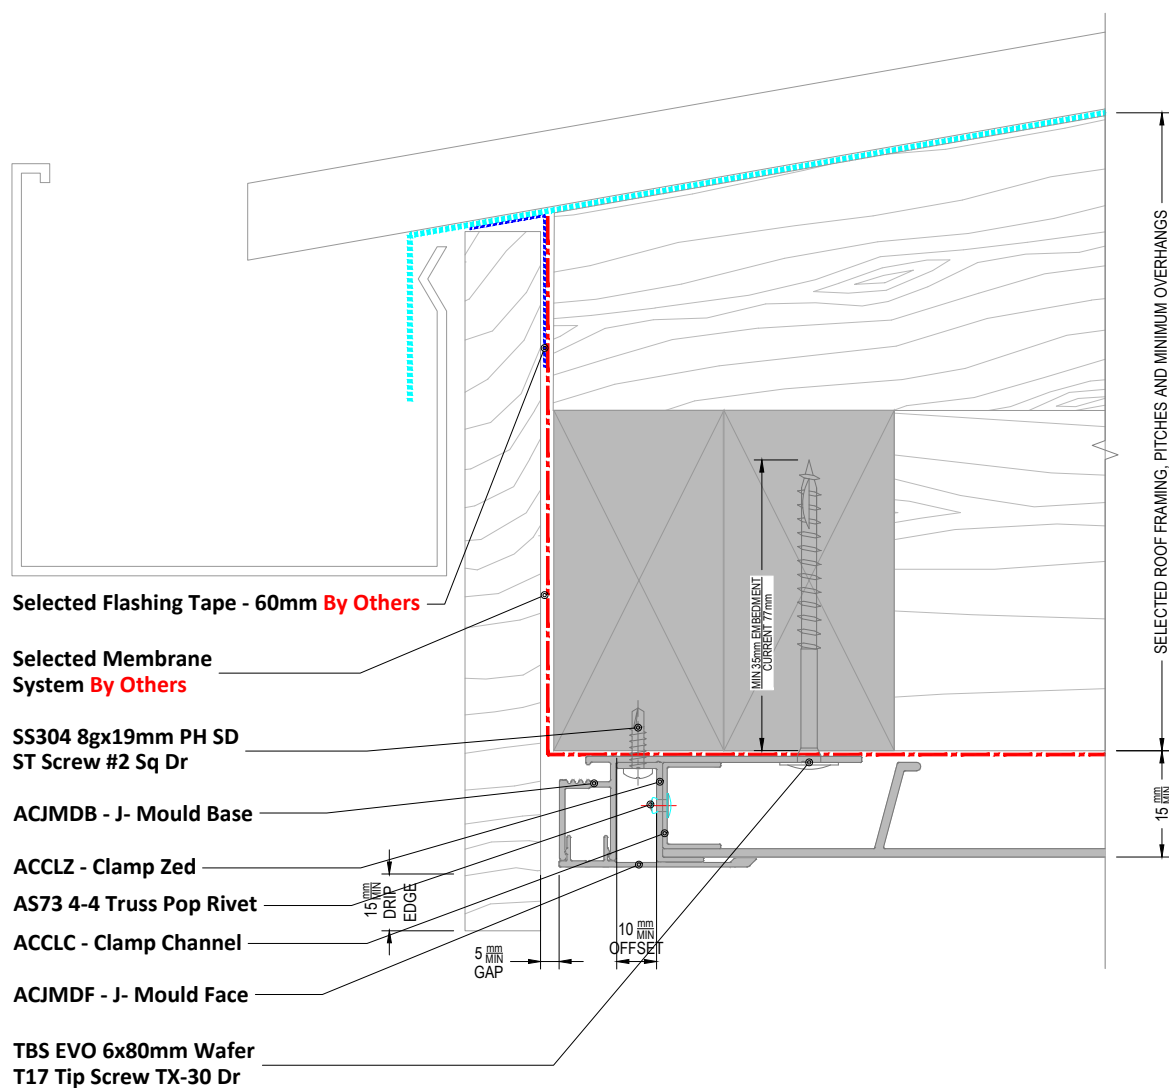

NOTE

Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use.
-By Others

Top Cladding_Barge/Fascia Board

Detail Number

AC-H-AR-4.8


Version

JAN 2024 [v1.5]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

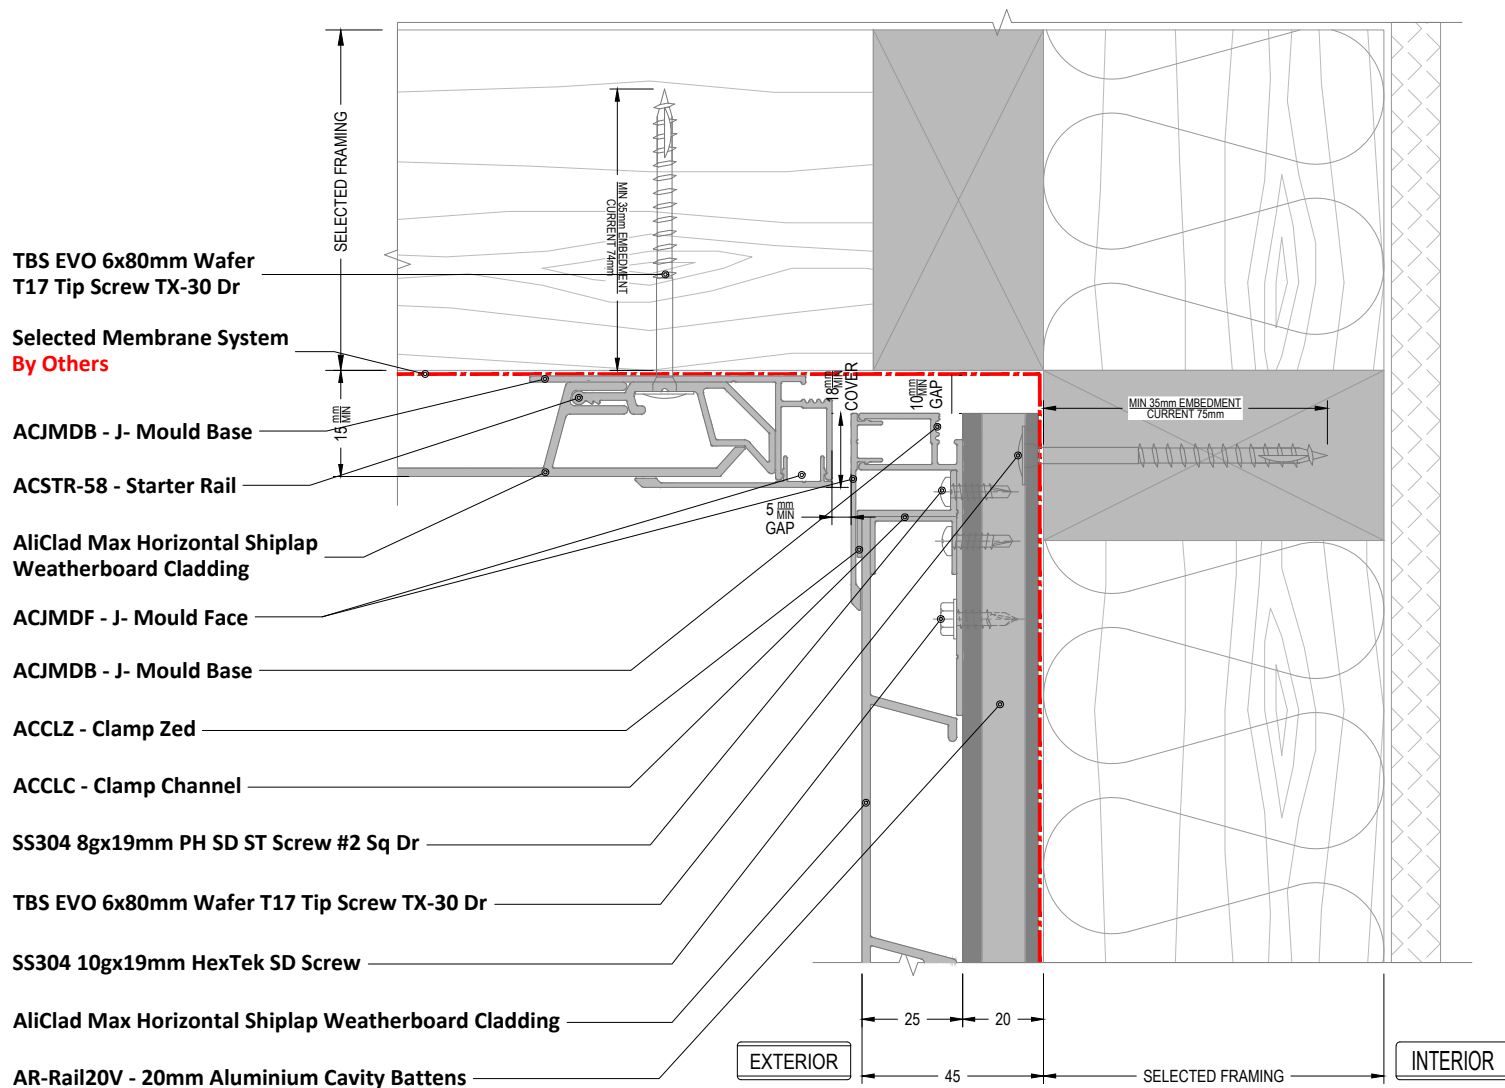

NOTE

Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use.
-By Others

Wall BLW_Soffit <90°

Detail Number

AC-H-AR-5.1


Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

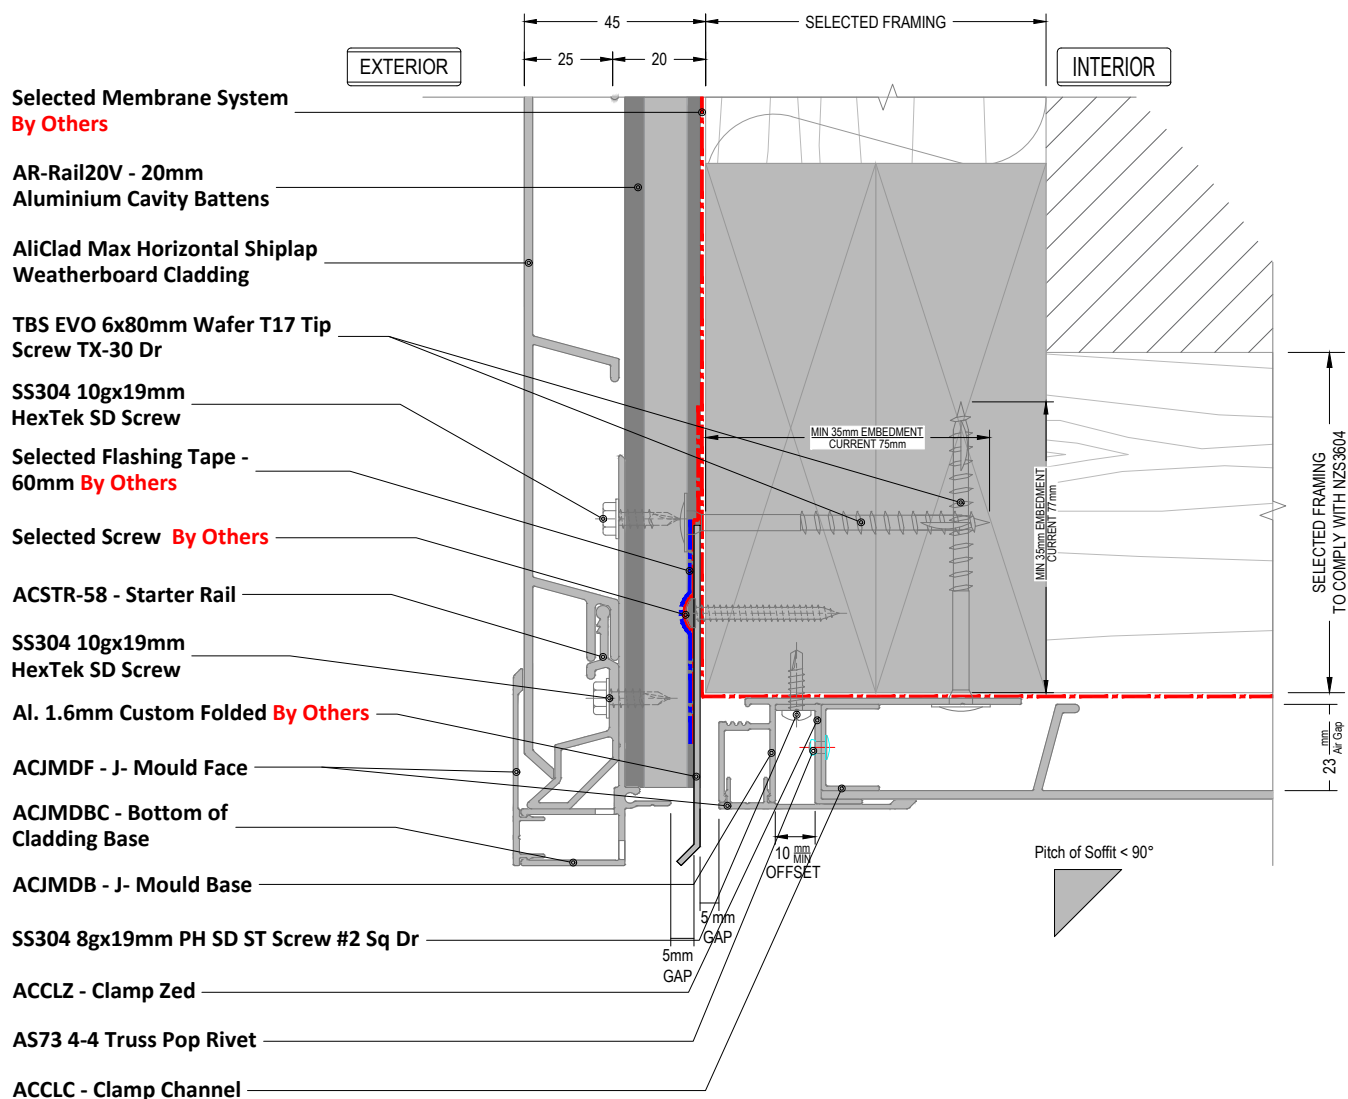

NOTE

Weathering membrane under soffit is not required,
but is recommendable for air barrier performance
when a rigid wind barrier is not in use. -By Others

NOTE 2

Flashings and Angles are not included in the system

Wall ABV_Soffit <90°

Detail Number

AC-H-AR-5.2



Version

JAN 2024 [v1.6]




MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

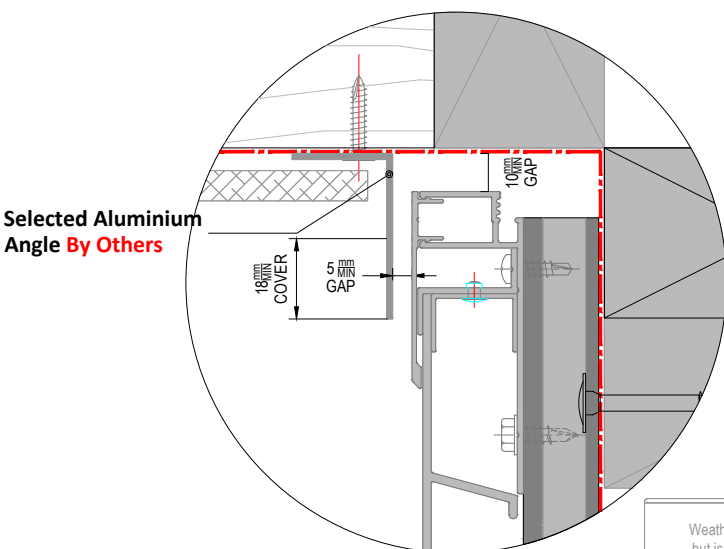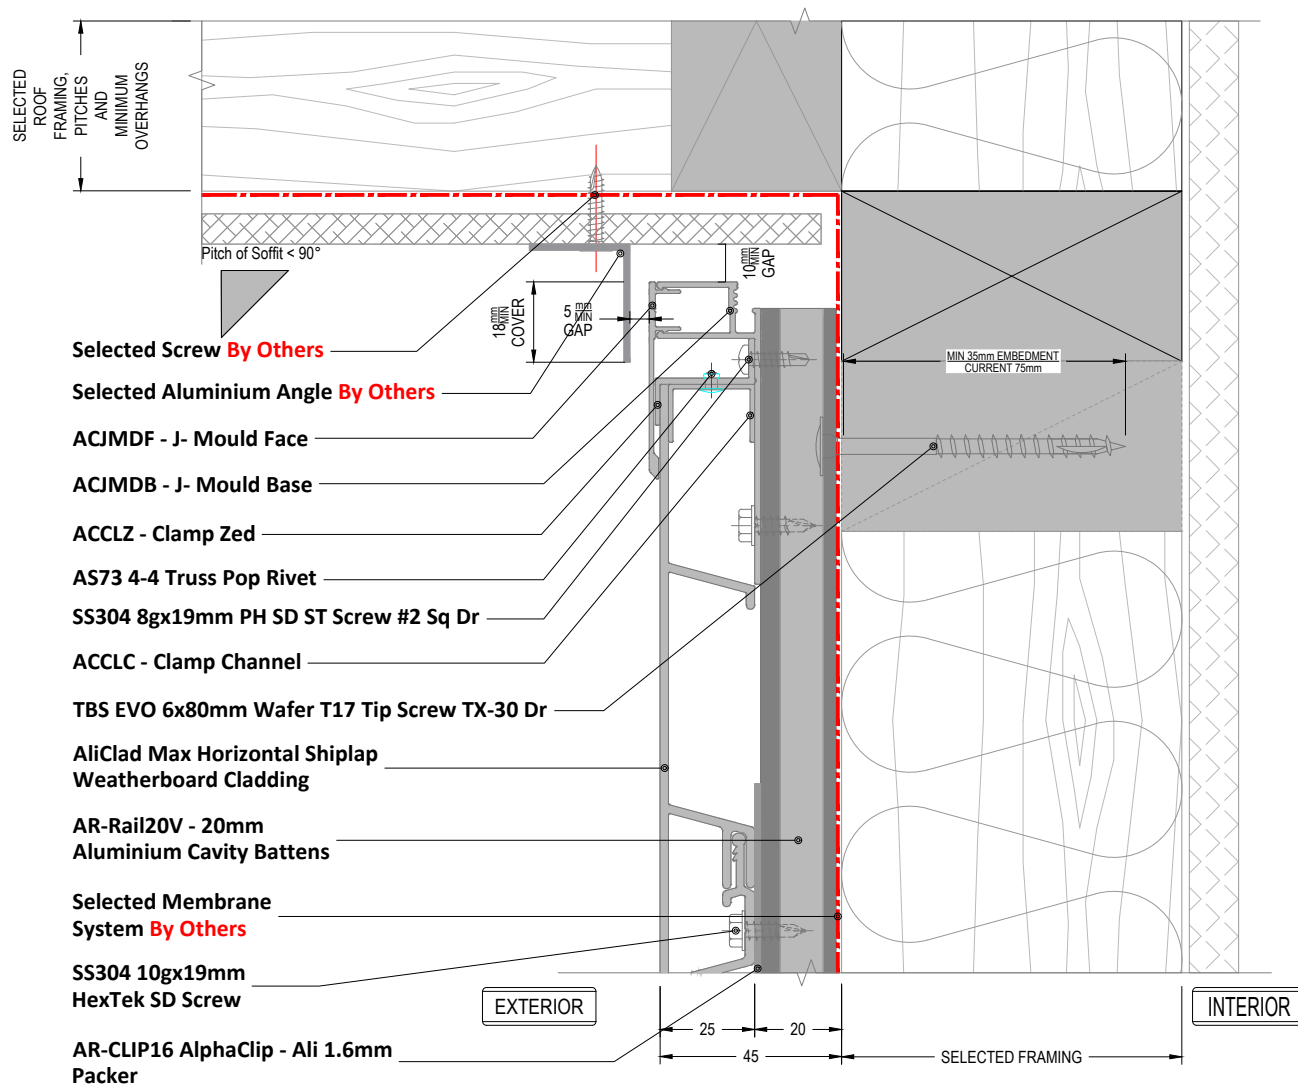

OPTION 2

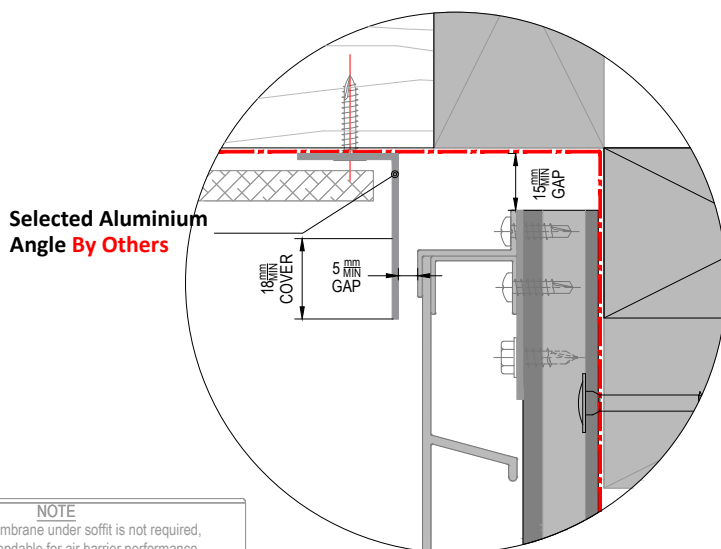

OPTION 3

NOTE
Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use. -By Others

NOTE 2
Flashings and Angles are not included in the system

Wall BLW_Flat Sheet Soffit <90°

Detail Number

AC-H-AR-5.6

Version

JAN 2024 [v1.6]

THE BUILDING AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Wet Seal Adhesion Tape **By Others**

Sill Tape - 150mm **By Others**

TBS EVO 6x80mm Wafer
T17 Tip Screw TX-30 Dr

SS304 8gx38mm PH SD
Screw #2 Sq.Dr

ACJMC - Jamb Clip

Selected Sealant on PEF
Rod to suit gap **By Others**

ACJMF - Jamb Flashing

Selected Membrane System
By Others

AR-Rail20V - 20mm
Aluminium Cavity Battens

SS304 10gx19mm
HexTek SD Screw

ACJMDB - J- Mould Base

AliClad Max Horizontal Shiplap
Weatherboard Cladding


ACJMDBC - Drained B.o.C. Base

6.4mm Closed Cell EPDM Tape **By Others**

ACCLZ - Clamp Zed

SS304 8gx19mm PH SD ST Screw #2 Sq Dr

ACJMDF - J- Mould Face

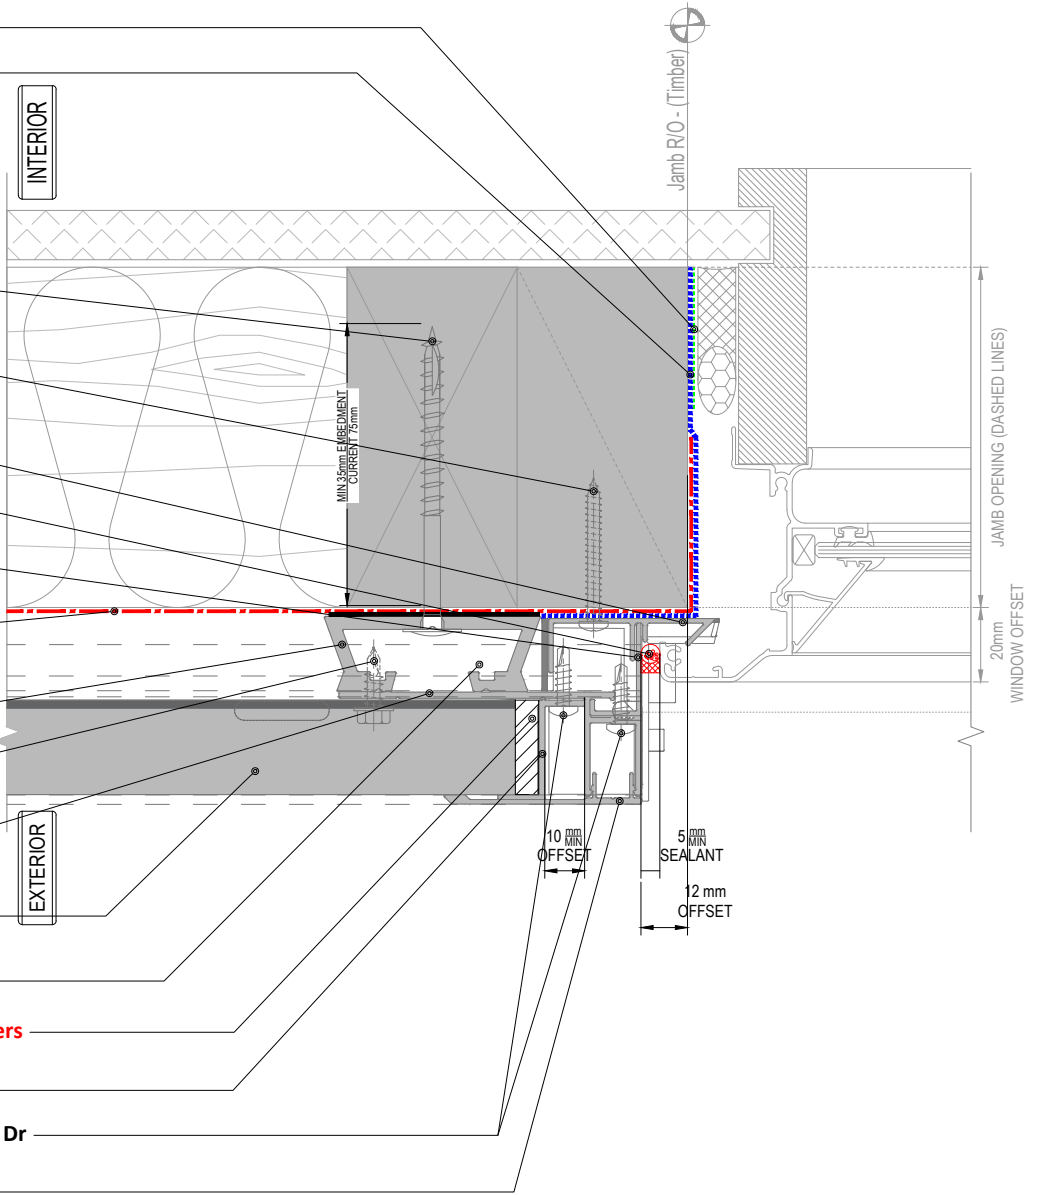

Window Jamb_Recessed

Detail Number

AC-H-AR-7.1

Version

JAN 2024 [v1.6]

THE BUILDING AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Selected Membrane System
By Others

AR-Rail20V - 20mm
Aluminium Cavity Battens

AliClad Max Horizontal Shiplap
Weatherboard Cladding

SS304 10gx19mm
HexTekSD Screw

TBS EVO 6x80mm Wafer T17 Tip
Screw TX-30 Dr

Selected Flashing Tape - 60mm By Others

ACSTR-58 - Starter Rail

SS304 10gx19mm
HexTek SD Screw

SS304 8gx38mm PH SD
Screw #2 Sq.Dr


ACJMDF - J- Mould Face

ACJMDBC - Bottom of
Cladding Base

Al. 1.6mm Custom Folded By Others

Sill Tape - 150mm By Others

Wet Seal Adhesion Tape By Others

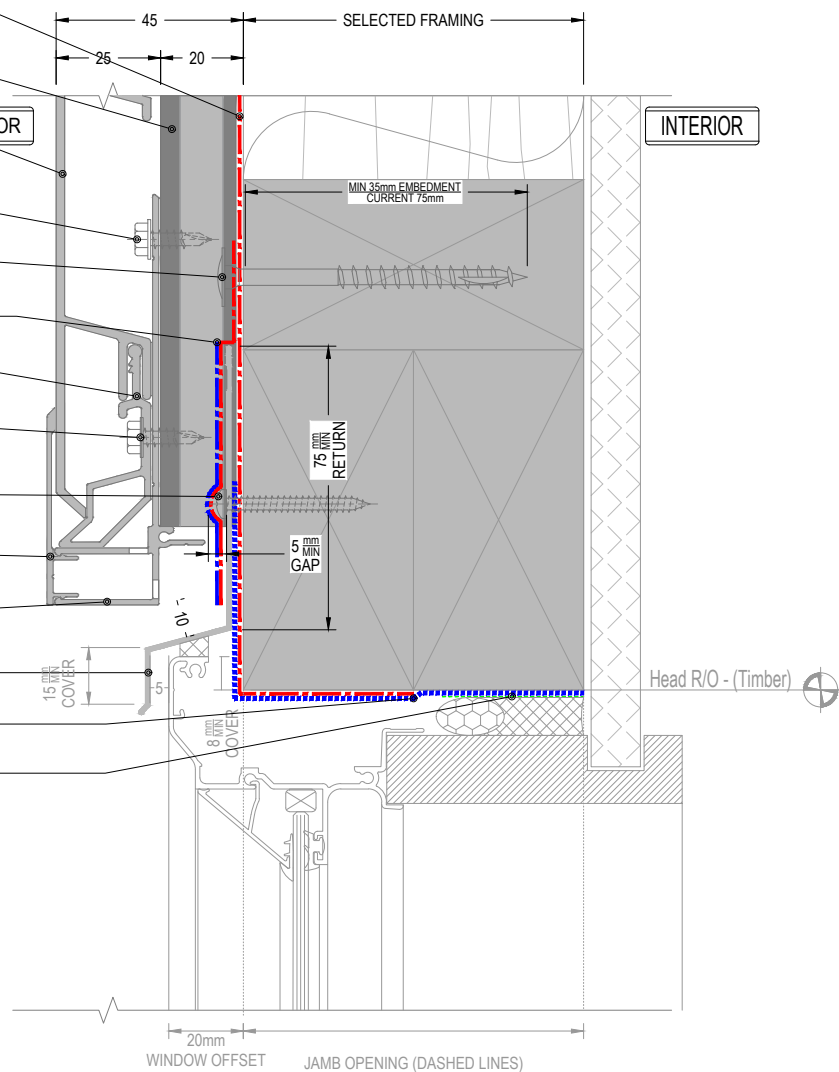

NOTE

Refer to drawing "7.1" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-H-AR-7.2

Version


JAN 2024 [v1.6]

THE BUILDING AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

Window Head_Recessed

ALICLAD MAX

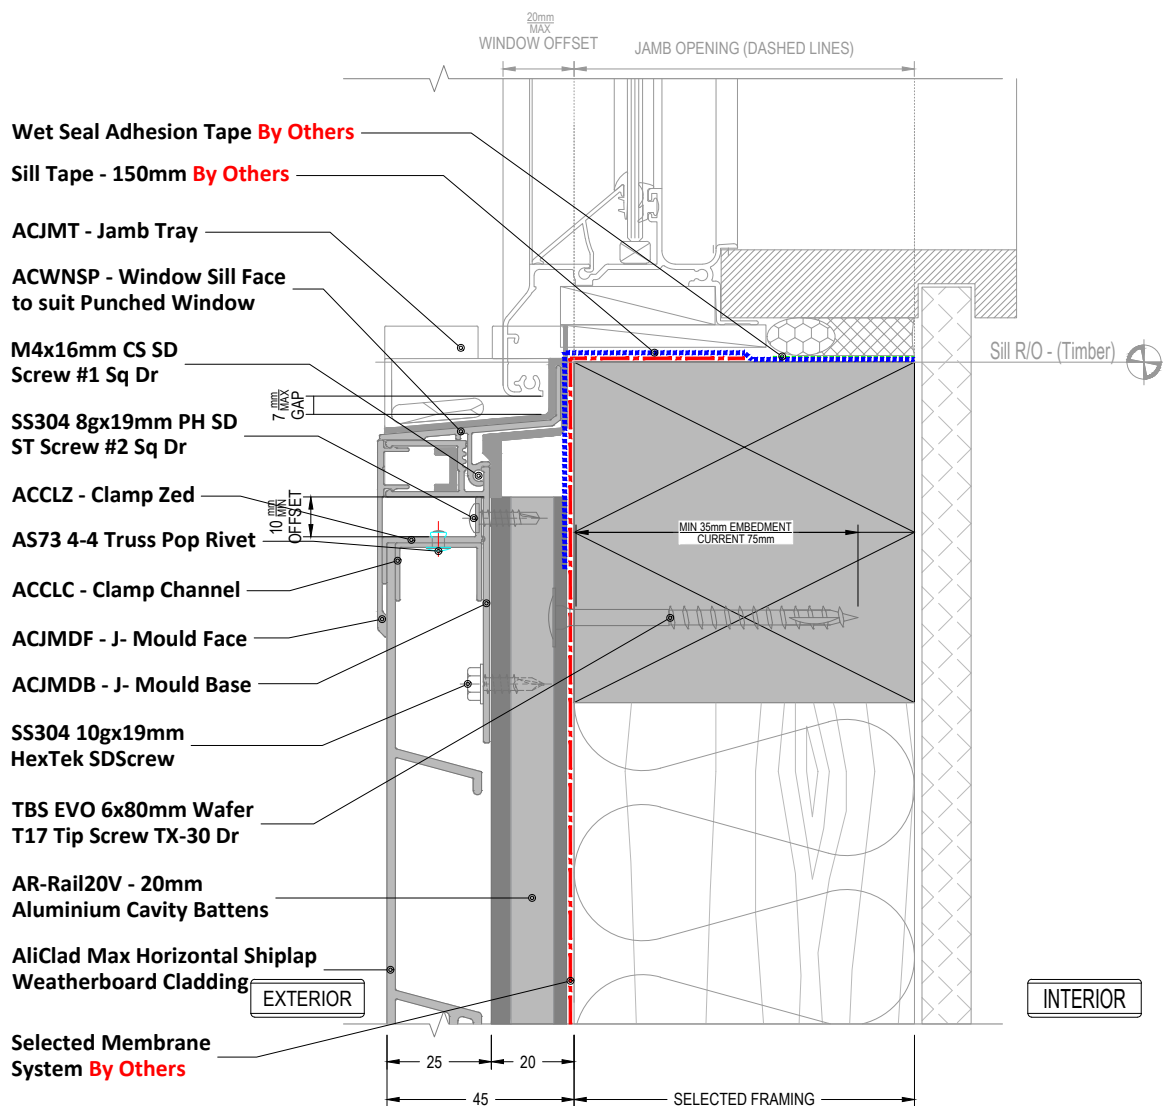

NOTE

Refer to drawing "7.1" for Sill/Jamb Junction

Window Sill_Recessed

Detail Number

AC-H-AR-7.3

Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Selected Membrane System **By Others**

AR-Rail20V - 20mm Aluminium Cavity Battens

AliClad Max Horizontal Shiplap Weatherboard Cladding

SS304 10gx19mm HexTek SD Screw

TBS EVO 6x80mm Wafer T17 Tip Screw TX-30 Dr

Selected Flashing Tape - 60mm **By Others**

ACSTR-58 - Starter Rail

SS304 10gx19mm HexTekSD Screw

Selected Screw **By Others**


ACJMDF - J- Mould Face

ACJMDBC - Bottom of Cladding Base

Al. 1.6mm Custom Folded **By Others**

Sill Tape - 150mm **By Others**

Wet Seal Adhesion Tape **By Others**

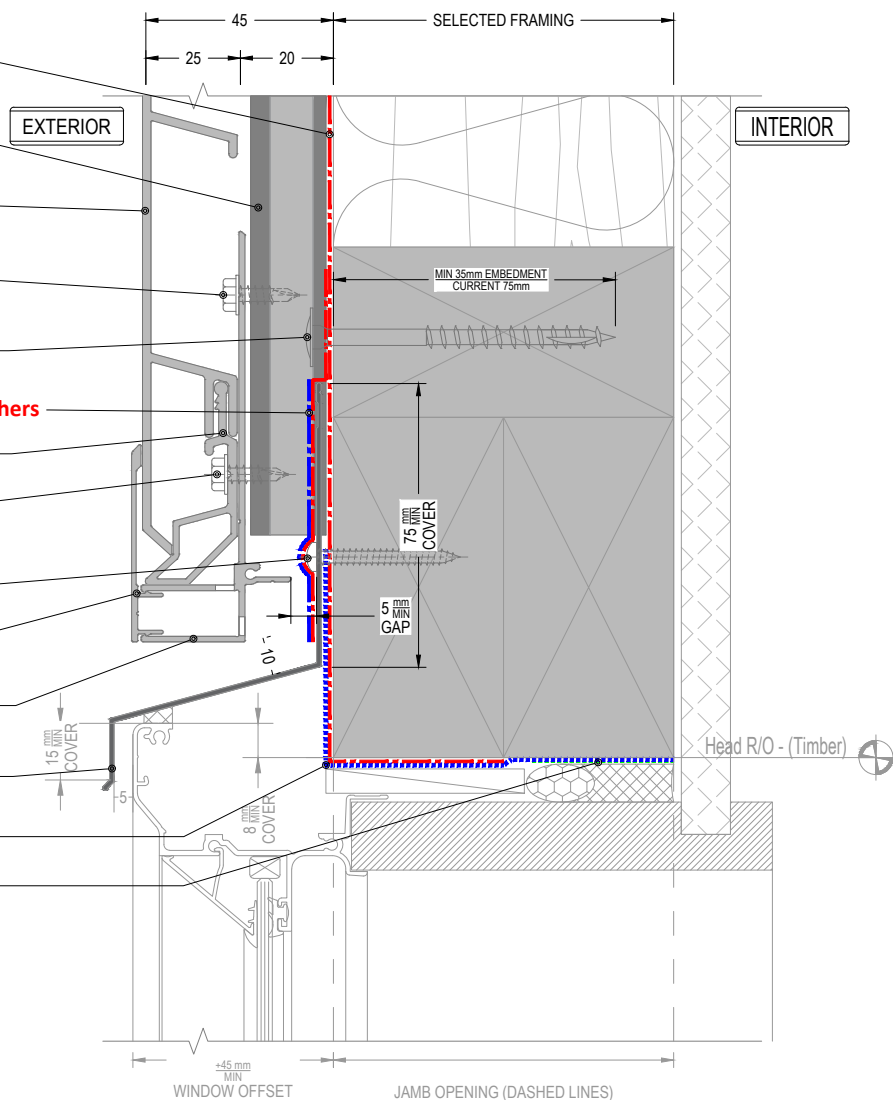

NOTE

Refer to drawing "7.4" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-H-AR-7.5

Version


JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS

Window Head_WANZ/Supported

ALICLAD MAX

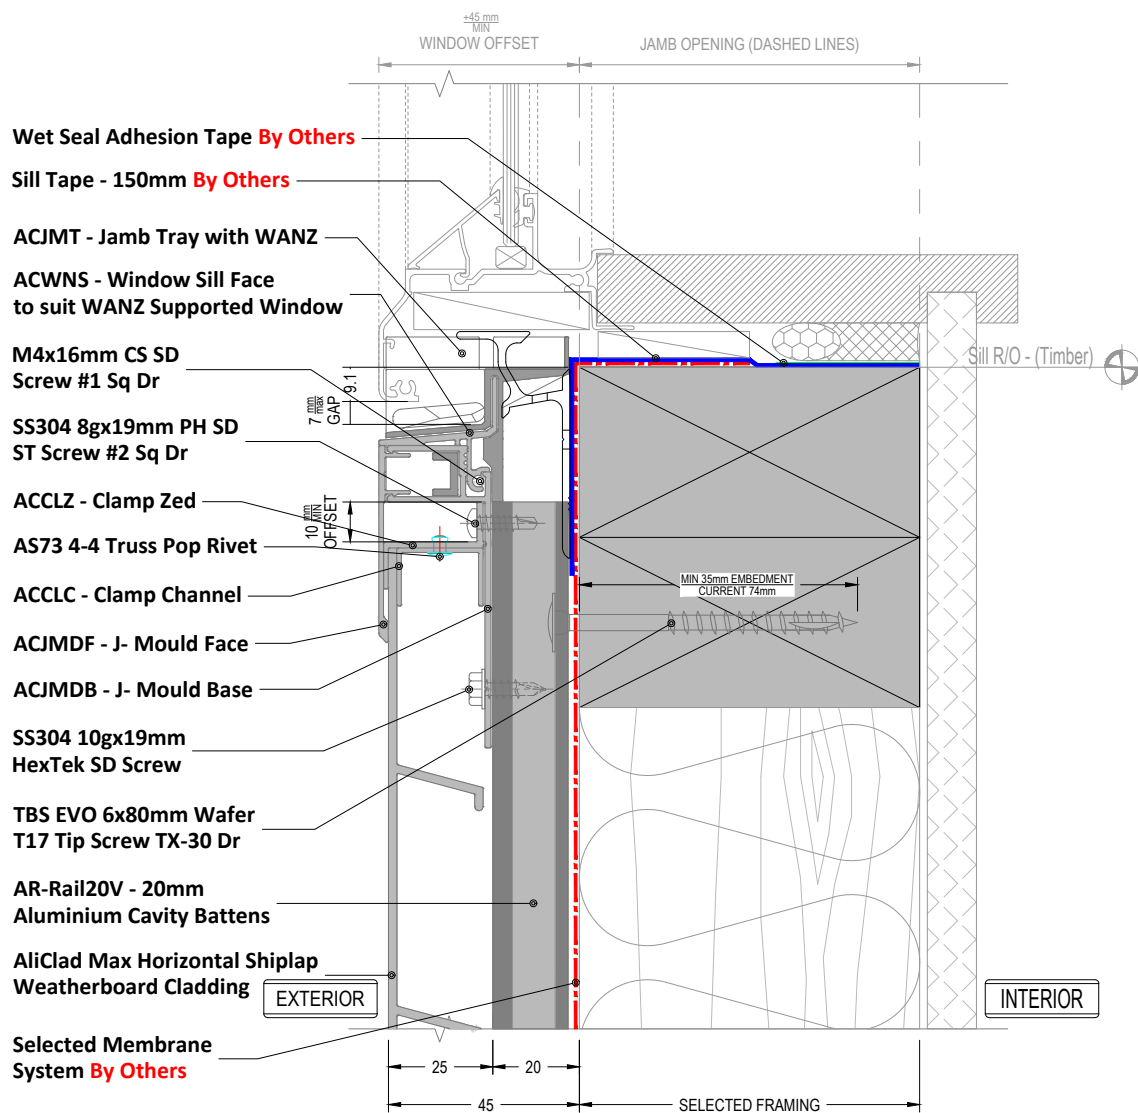

NOTE

Refer to drawing "7.4" for Sill/Jamb Junction

Window Sill_WANZ/Supported

Detail Number

AC-H-AR-7.6

Version

JAN 2024 [v1.6]



MATERIALS • SYSTEMS • SOLUTIONS