


ALICLAD MAX



II VERTICAL II TIMBER BATTEN

HIGH PERFORMANCE ALUMINIUM
WEATHERBOARD SYSTEM

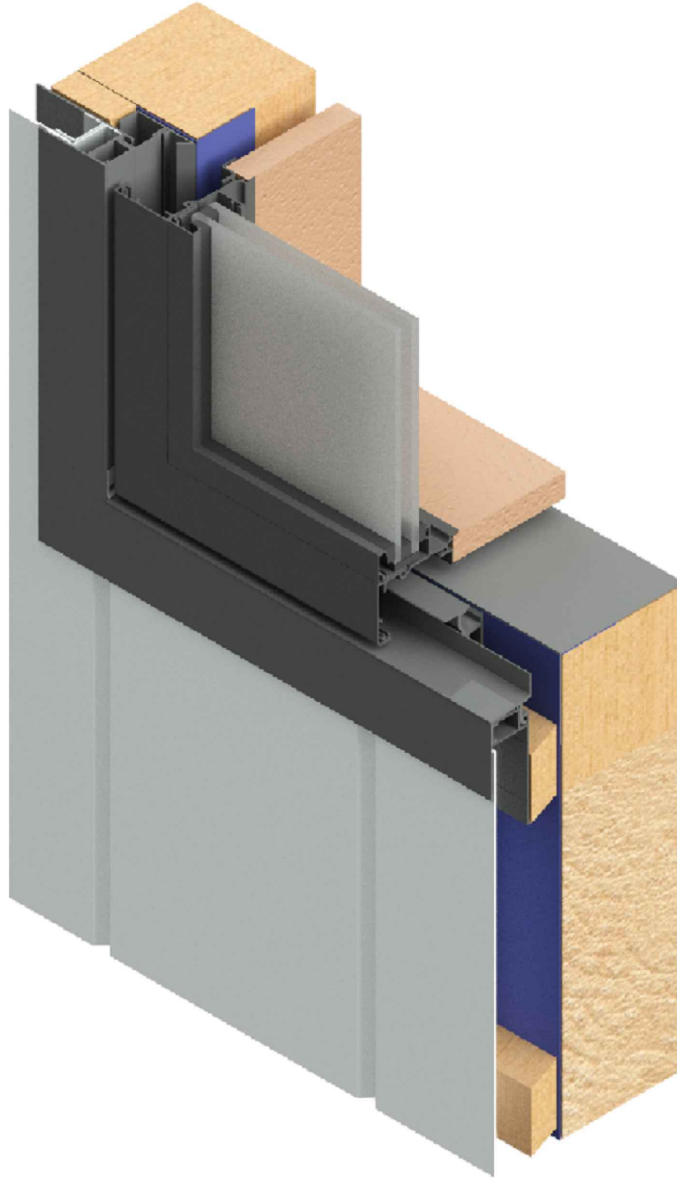

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

The Building Agency is the exclusive distributor of a cultivated selection of well-respected brand name cladding and roofing products and systems.

The Building Agency's focus is to ensure correct and comprehensive selections from our product and system ranges and to assist with design, specification and delivery of high performance buildings.

The Building Agency introduces our newly developed - aliclad Max System

Performance and aesthetics find a perfect balance in the latest contemporary aluminium cladding system designed in Australia for our local conditions.

The tough Australia climate calls for exterior products that can perform in all weather conditions, meet the most stringent code and standards, and bring elegance and architectural integrity.

AliClad Max System, designed by The Building Agency, is a premium aluminium weatherboard system that has had every detail and feature designed, tuned and resolved. Backed by decades of local experience and international product system knowledge, AliClad Max System offers architects, builders and developers a robust and beautifully finished product, supported on an easy-to-install fixing system engineered to perform.

Designed for large-scale commercial projects with a residential application.
Designed for:

WEATHER-TIGHTNESS: The system has been designed in line with BCA and been tested to AS/NZS4284:2008.

STRUCTURE: The AliClad Max System is designed for buildings in wind zones from Low to Extra High Wind loadings and engineered to be fixed at maximum span distances for easier application and reduced project costs.

FIRE PROTECTION: Aluminium is defined as non-combustible and when correctly specified the support system forms a limited / non-combustible wall assembly. AliClad Max System is tested for buildings over 25m in total height by a full-scale system fire performance test to BR135 and BS8414.

FINISH AND AESTHETICS: Sublimated woodgrains, Flat and matt powdercoat options, Anodised, Anodised-look paint finishes, and horizontal and vertical profile alignments achieve both classic and contemporary designs with ease.



MATERIALS • SYSTEMS • SOLUTIONS

TABLE OF CONTENTS

AliClad Max System- Vertical - Timber Batten

Information

AC-V-TB-CP - AliClad Max System Compliance Statement
AC-V-TB-Apx.A.T2 - AliClad Max System Appendix A - Table 2 - Fixing
Span Table

Profiles & Accessories

AC-V-TB-PL - AliClad Max System Parts List
AC-V-TB-PRO-01 - AliClad Max System Cladding Profiles
AC-V-TB-PRO-02 - AliClad Max System Trims Profiles
AC-V-TB-MDS - AliClad Max System Mechanical Drainage System Parts

General Processing

AC-V-TB-GP-01 - Cut Board Terminations

TYPICAL DETAILS

1. CORNERS

- 1.1. External Corner
- 1.2. Internal Corner
- 1.3. External Corner - Smaller Cladding Type
- 1.4. Internal Corner - Smaller Cladding Type

2. VERTICAL JOINTS

- 2.1. Vertical Joint Typical
- 2.2. Vertical Joint Orientation Change
- 2.3. Vertical Joint Smaller Cladding Type
- 2.4. Vertical Joint Larger Cladding Type

3. HORIZONTAL JOINTS

- 3.1. Typical Horizontal Joint
- 3.2. Interstorey Joint

4. CLADDING TOP & BOTTOM

- 4.1. Top of Cladding/Parapet
- 4.2. Bottom of Cladding at Ground
- 4.4. Bottom of Cladding at Apron Roof
- 4.8. Barge to Soffit

5. SOFFITS

- 5.1. Wall Below Soffit <90°
- 5.2. Wall Above Soffit <90°
- 5.6. Wall Below Flat Sheet Soffit <90°
- 5.8. Wall Below Flat Sheet Soffit >90°

7. JOINERY

- 7.1. Residential Window Jamb - Recessed
- 7.2. Residential Window Head - Recessed
- 7.3. Residential Window Sill - Recessed
- 7.4. Residential Window Jamb - WANZ/Supported
- 7.5. Residential Window Head - WANZ/Supported
- 7.6. Residential Window Sill - WANZ/Supported

Detail Number

AC-V-TB-DL.2

Version

[v2.1]

Detail List



APPENDIX A - SPAN TABLES

Table 1: Vertically Aligned - Installed on Timber or Plastic Batten					
WIND ZONE	ALICLAD MAX TYPE				
	V136	V200	S150	S200	S125/75
	MAXIMUM ALLOWABLE SPAN (mm)				
LOW 00m/s-32m/s <0.6kPa	2200	2200	2200	2200	2200
MEDIUM 32m/s-37m/s >0.66kPa & <0.88kPa	2000	2000	2000	2000	2000
HIGH 37m/s-44m/s >0.88kPa & <1.25kPa	1800	1800	1800	1800	1800
VERY HIGH 44m/s-50m/s >1.25kPa & <1.61kPa	1600	1600	1600	1600	1600
EXTRA HIGH 50m/s-55m/s >1.61kPa & <1.9kPa	1400	1400	1400	1400	1400
SPECIFIC ENGINEERING DESIGN >55m/s >1.9kPa	SED	SED	SED	SED	SED

1. SS304 12g x 65mm HexTek Screw 10mm Hex (35mm minimum embedment), screw fixing at every AliClad Max board.
 2. Table is applicable for non-structural H3.1 Timber and Extruded Plastic cavity packer battens either of which form a nominal 20mm cavity
 3. Wind Zone Classifications - ULS, considered in Positive(+) Pressure and Negative(-) Suction

* Design Assumptions:

- The wind pressures are for external wind only. Internal pressures will not be applied to the cladding and assumed to be resisted by the internal lining.
- Load on each panel is uniformly distributed.
- The span/deflection limit for SLS wind load is 250mm for aluminium battens/zincalume top hats and L/175 for the AliClad Max boards, with the serviceability wind load equal to 68% of the ULS wind load.
- SS304 12g x 65mm HexTek SD Screw 10mm Hex (AliClad board to Timber Batten)
- Timber is assumed Radiata Pine (Group J4 for withdrawal, group 5 in shear, with a characteristic density in excess of 420kg/m³).
 - Timber studs at 600mm o/c and
 - timber nogs/dwangs at 800mm o/c and
- For Edge Distances Framing fixing face thickness is assumed as 45mm

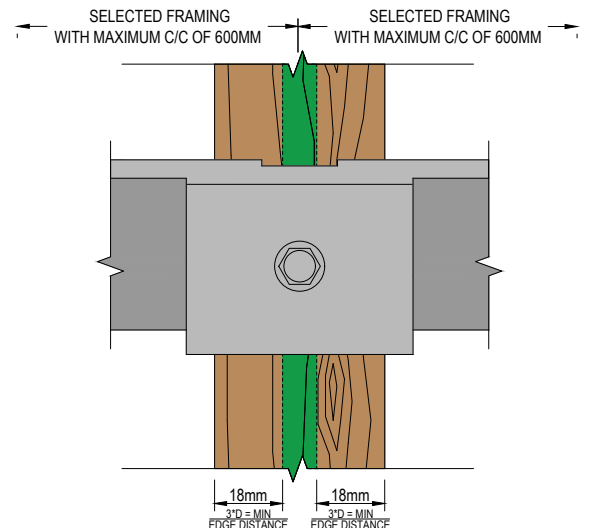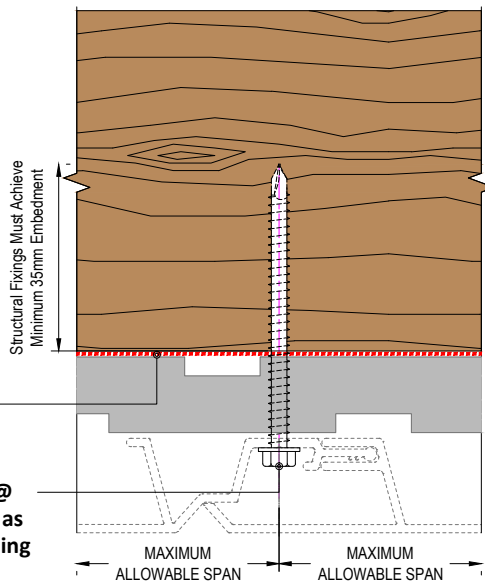

Fixings for Vertical Timber Batten @
 Each Nog = 800mm MAX C/C or less as
 appropriate to site wind zone & bracing
 requirements.

ALICLAD MAX

PARTS LIST

CLADDING PROFILES

- ACV136** - AliClad Max V136, 136x25 V Shiplap Weatherboard, 5.8m.
ACV200 - AliClad Max V200, 200x25 V Shiplap Weatherboard, 5.8m.
ACS150 - AliClad Max S150, 150x25 Shadow Groove Weatherboard, 5.8m.
ACS200 - AliClad Max S200, 200x25 Shadow Groove Weatherboard, 5.8m.
ACS125/75 - AliClad Max S200-125/75, 200x25 Shadow Groove Weatherboard with 75mm & 125mm board look, 5.8m.

2 PIECE BASE CLIPS

- ACHMDB-58** AliClad Max - H Mould Base, 5.8m.
ACJMDB-58 AliClad Max - J-Mould Base, 5.8m.
ACJMDF-58 AliClad Max - J-Mould Face, 5.8m, Selected Finish.
ACINTB-58 AliClad Max - Internal Corner Base, 5.8m, Selected Finish.
ACEXTB-58 AliClad Max - External Corner Base, 5.8m.
ACJMDBC-58 AliClad Max - Bottom of Cladding Base, 5.8m, Selected Finish.

2 PIECE FACES & TRIMS

- ACINTF** - AliClad Max - Internal Corner Face, 5.8m.
ACWNS - AliClad Max - Window Sill Face, - to suit WANZ supported window, 5.8m, Selected Finish.
ACWNSP - AliClad Max - Window Sill Face - to suit Punched Window, 5.8m, Selected Finish.
ACJMDF - AliClad Max - J Mould Face, 5.8m, Selected Finish.
ACHMDF - AliClad Max - H Mould Face, 5.8m, Selected Finish.
ACEXTF - AliClad Max - External Corner Face, 5.8m, Selected Finish.

JUNCTION ELEMENTS

- ACCLZ-58** AliClad Max - Clamp Zed, 5.8m, Selected Finish.
ACCLC-58 AliClad Max - Clamp Channel, 5.8m, Mill Finish.
ACSTR-58 AliClad Max - Starter Rail, 5.8m, Mill Finish.
ACJMC-58 AliClad Max - Jamb Clip, 5.8m, Mill Finish.
ACJMF-58 AliClad Max - Jamb Flashing, 5.8m, Selected Finish.

MECHANICAL DRAINAGE SYSTEM

- ACJMT-01RIGHT** AliClad Max - Type 1a Jamb Tray Right
ACJMT-01LEFT AliClad Max - Type 1b Jamb Tray Left
ACJMT-02RIGHT AliClad Max - Type 2a Jamb Tray Right
ACJMT-02LEFT AliClad Max - Type 2b Jamb Tray Left

ALPHA RAIL SUPPORT SYSTEM PROFILES

- AR-CLIP100** Alpha Rail Packer Clip 10mm, 50mm.
AR-CLIP50 Alpha Rail Packer Clip 5mm, 50mm.
AR-CLIP30 Alpha Rail Packer Clip 3mm, 50mm.
AR-CLIP16 Alpha Rail Packer Clip 1.6mm, 50mm.
AR-RAIL20H Alpha Rail Vertical Rail 20mm, 5.8m.
AR-RAIL20V Alpha Rail Horizontal Rail 20mm, Drained, 5.8m.

AliClad Max - Parts List

Detail Number

AC-V-TB-PL

Version

[v2.2]



MATERIALS • SYSTEMS • SOLUTIONS


ALICLAD MAX

CLADDING PROFILES


HIGH PERFORMANCE ALUMINIUM
WEATHERBOARD SYSTEM

2.1


VI36

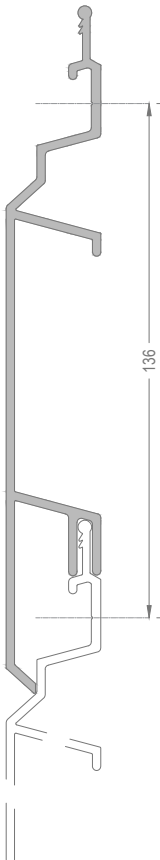


V200

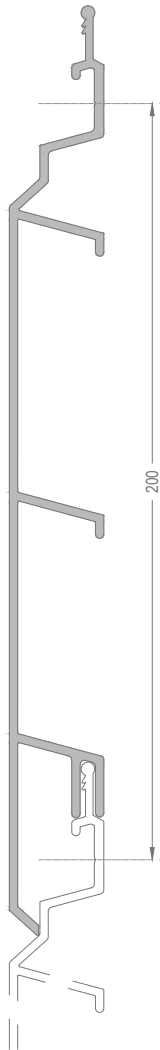


SI50

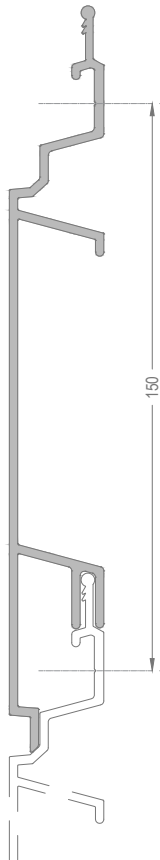

S200

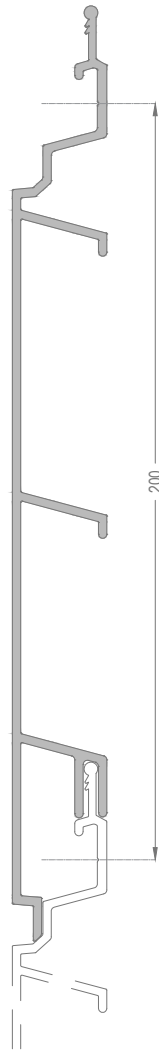

SI25-75

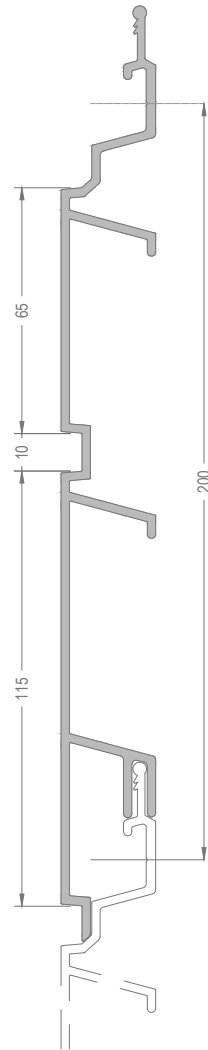

V

≡ - GROOVE

S

□ - GROOVE

Cladding Profiles

Detail Number

AC-V-TB-PRO-01

Version

[v2.2]




MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX


TRIMS - PROFILES

TYPICAL ASSEMBLIES


J-MOULD




WANZ WINDOW SILL

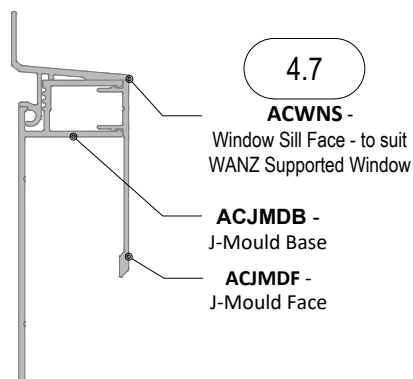


PUNCHED WINDOW SILL

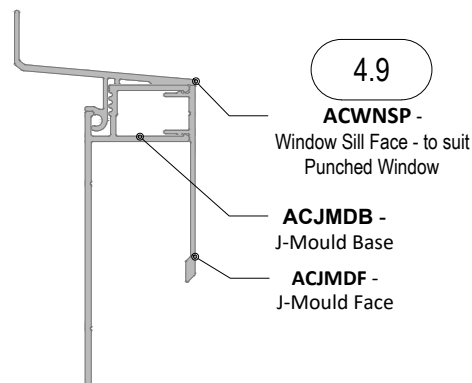


TYPICAL BASE OF CLADDING

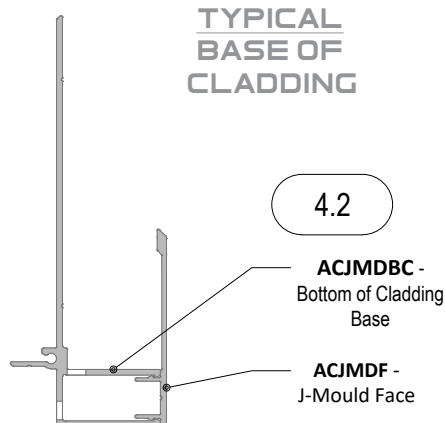


TYPICAL JAMB

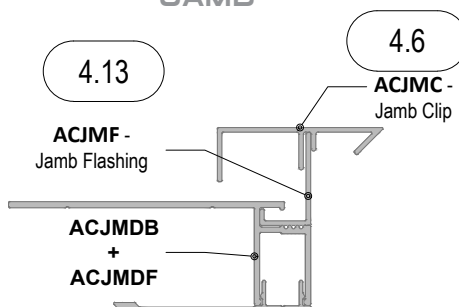


STARTER




ENDER

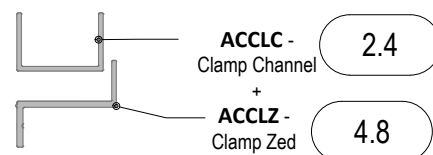


TYPICAL VERTICAL H-JOINT

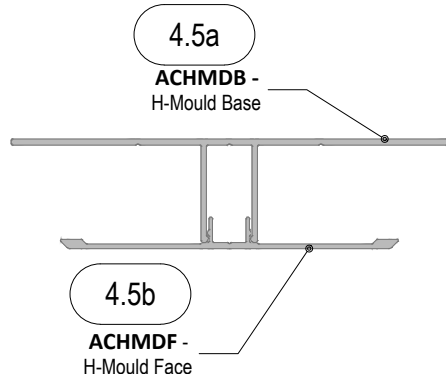

EXTERNAL CORNER

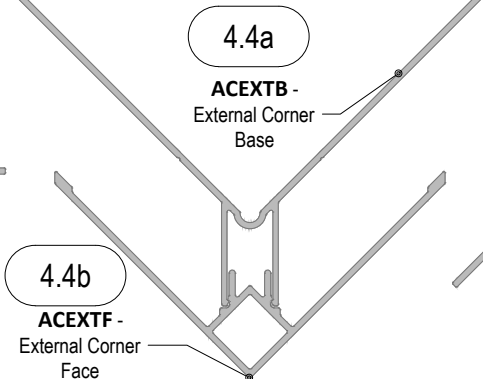

INTERNAL CORNER

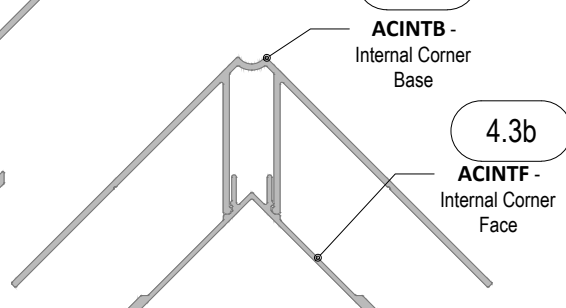

Accessories

Detail Number

AC-V-TB-PRO-02

Version

[v2.2]

THE BUILDING AGENCY


MATERIALS • SYSTEMS • SOLUTIONS

MECHANICAL DRAINAGE SYSTEM

PROPRIETARY JAMB-TO-SILL DRAINAGE CLIPS
- AVAILABLE IN WHITE, GREY AND BLACK.


TYPE I - FOR WINDOWS USING WANZ BAR SUPPORT

ACJMT-01LEFT -
Type 1 Jamb Tray Left




SECTION

4.11a





PLAN

ACJMT-01RIGHT -
Type 1 Jamb Tray Right




4.11b

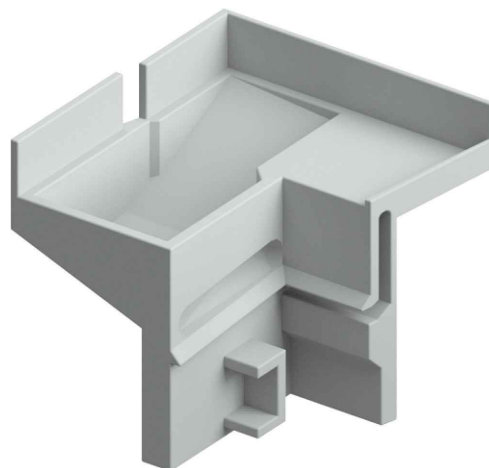


TYPE II - FOR PUNCHED OR RECESSED WINDOWS

ACJMT-02LEFT -
Type 2 Jamb Tray Left




SECTION

4.12b





PLAN

ACJMT-02RIGHT -
Type 2 Jamb Tray Right



4.12a

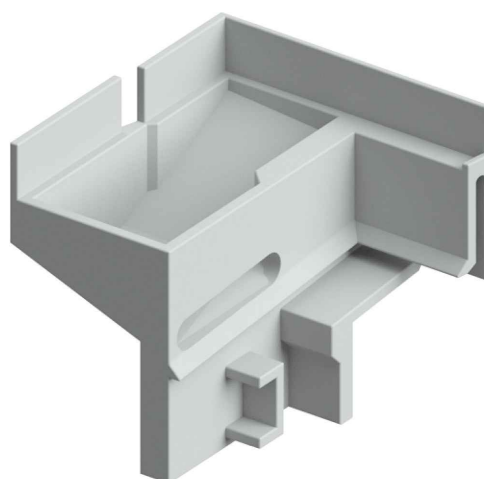

Mechanical Drainage System

Detail Number

AC-V-TB-ACC-01

Version

[v2.2]


VENTILATED CAVITY H3.I TIMBER BATTENS

ALL HORIZONTALS
45X20MM DUAL BEVEL/DUAL CASTELLATION




Top View

3.1




Side View

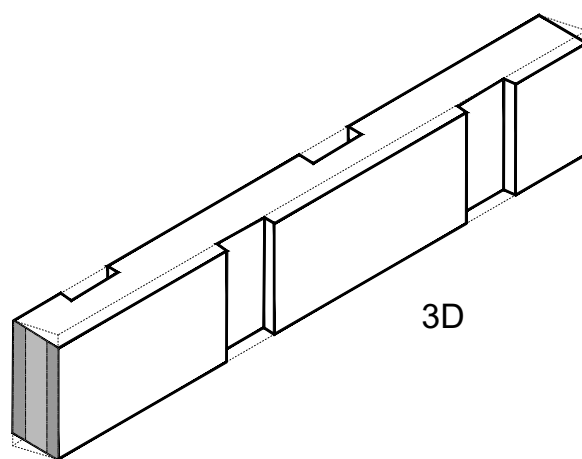


3D

ALL VERTICALS
45X20MM SQUARE



Top View

3.2

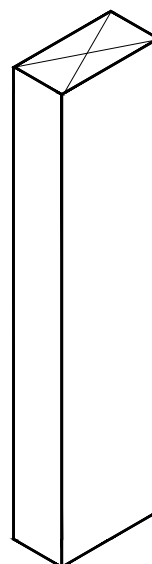

3D

Timber Batten

Detail Number


AC-V-TB-ACC-02

Version

[v2.1]

ALICLAD MAX

PROCESSING - RIPPED WEATHERBOARD TERMINATION

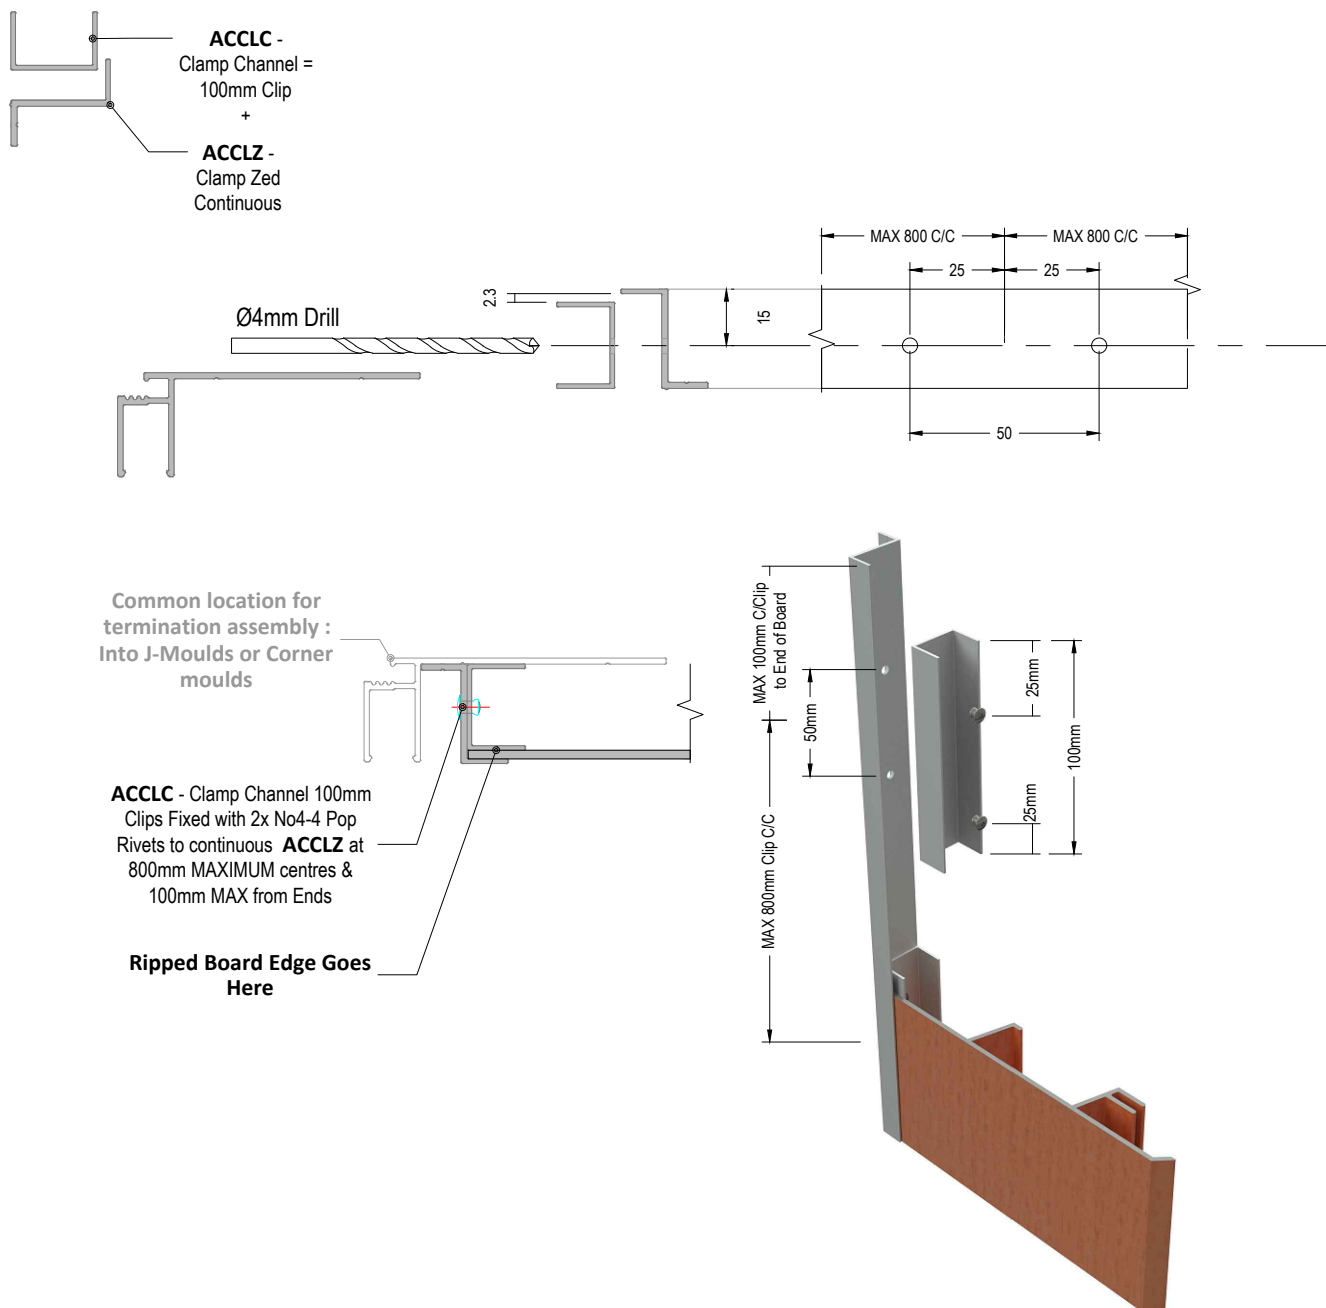

General Processing

Detail Number

AC-GP-1


Version

[v2.2]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

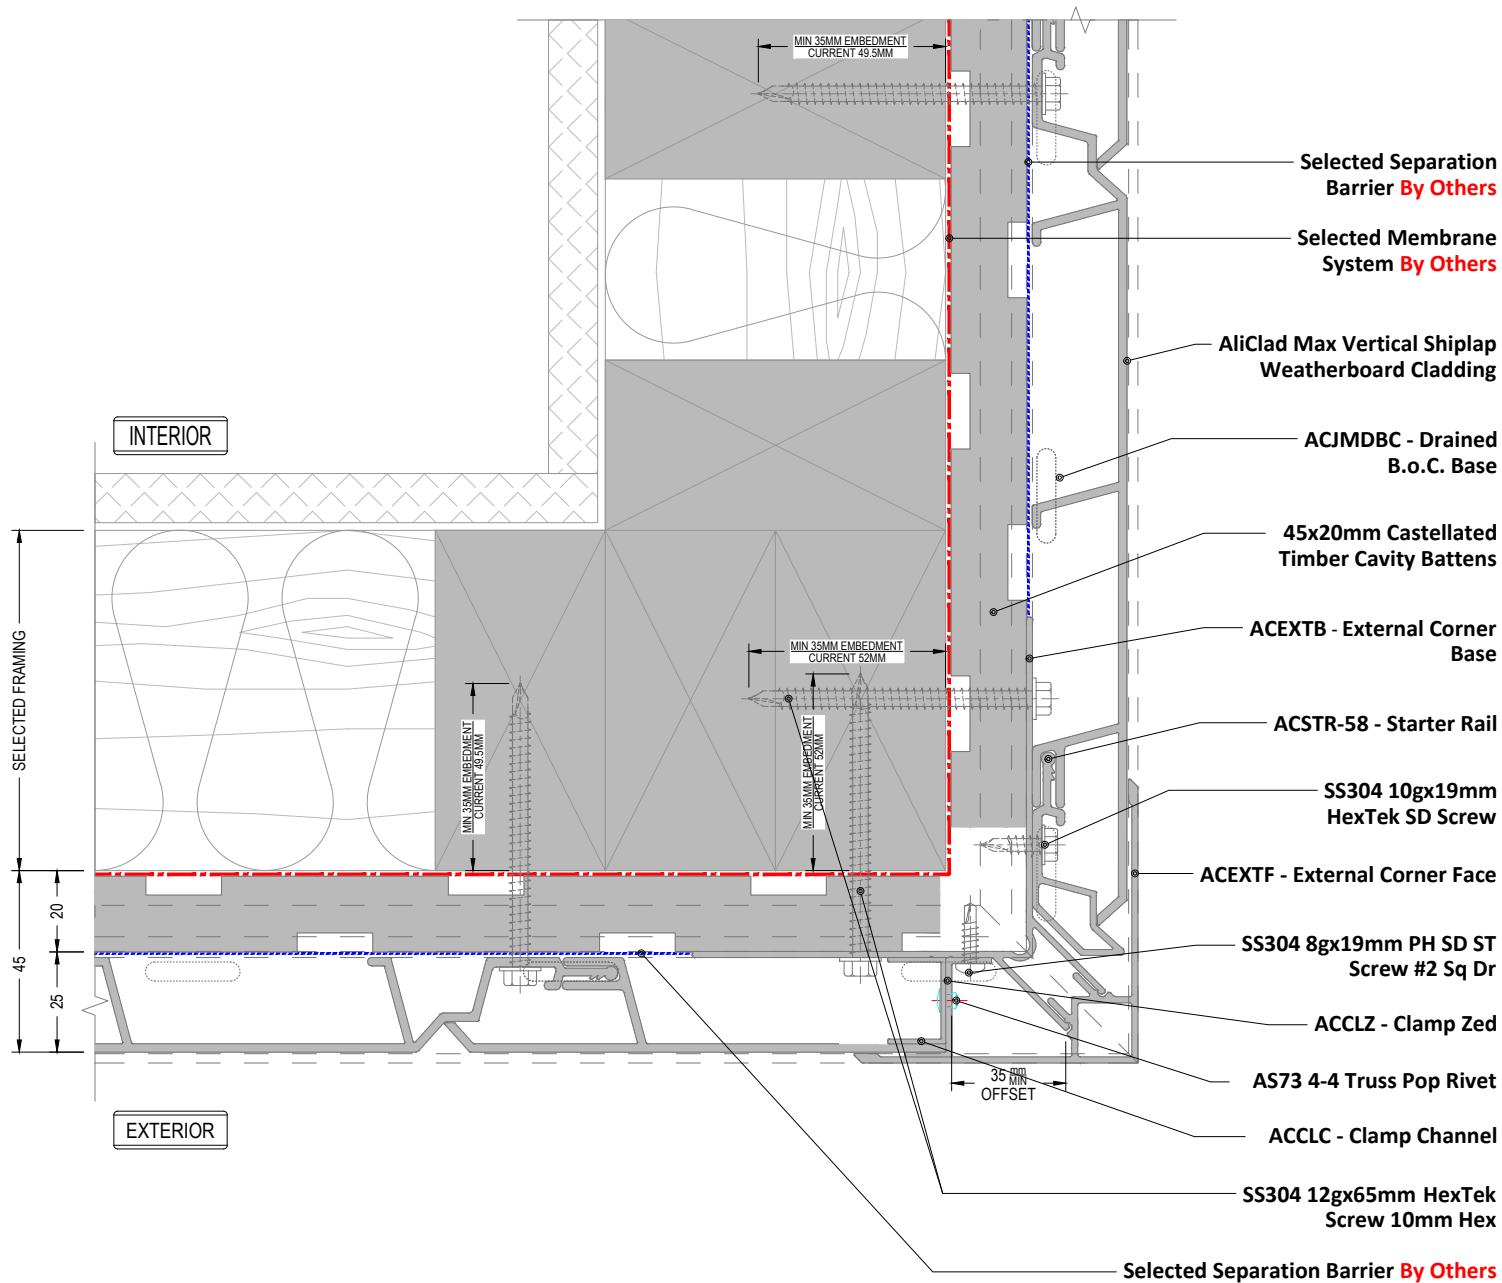

External Corner

Detail Number

AC-V-TB-1.1


Version

[v2.3]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

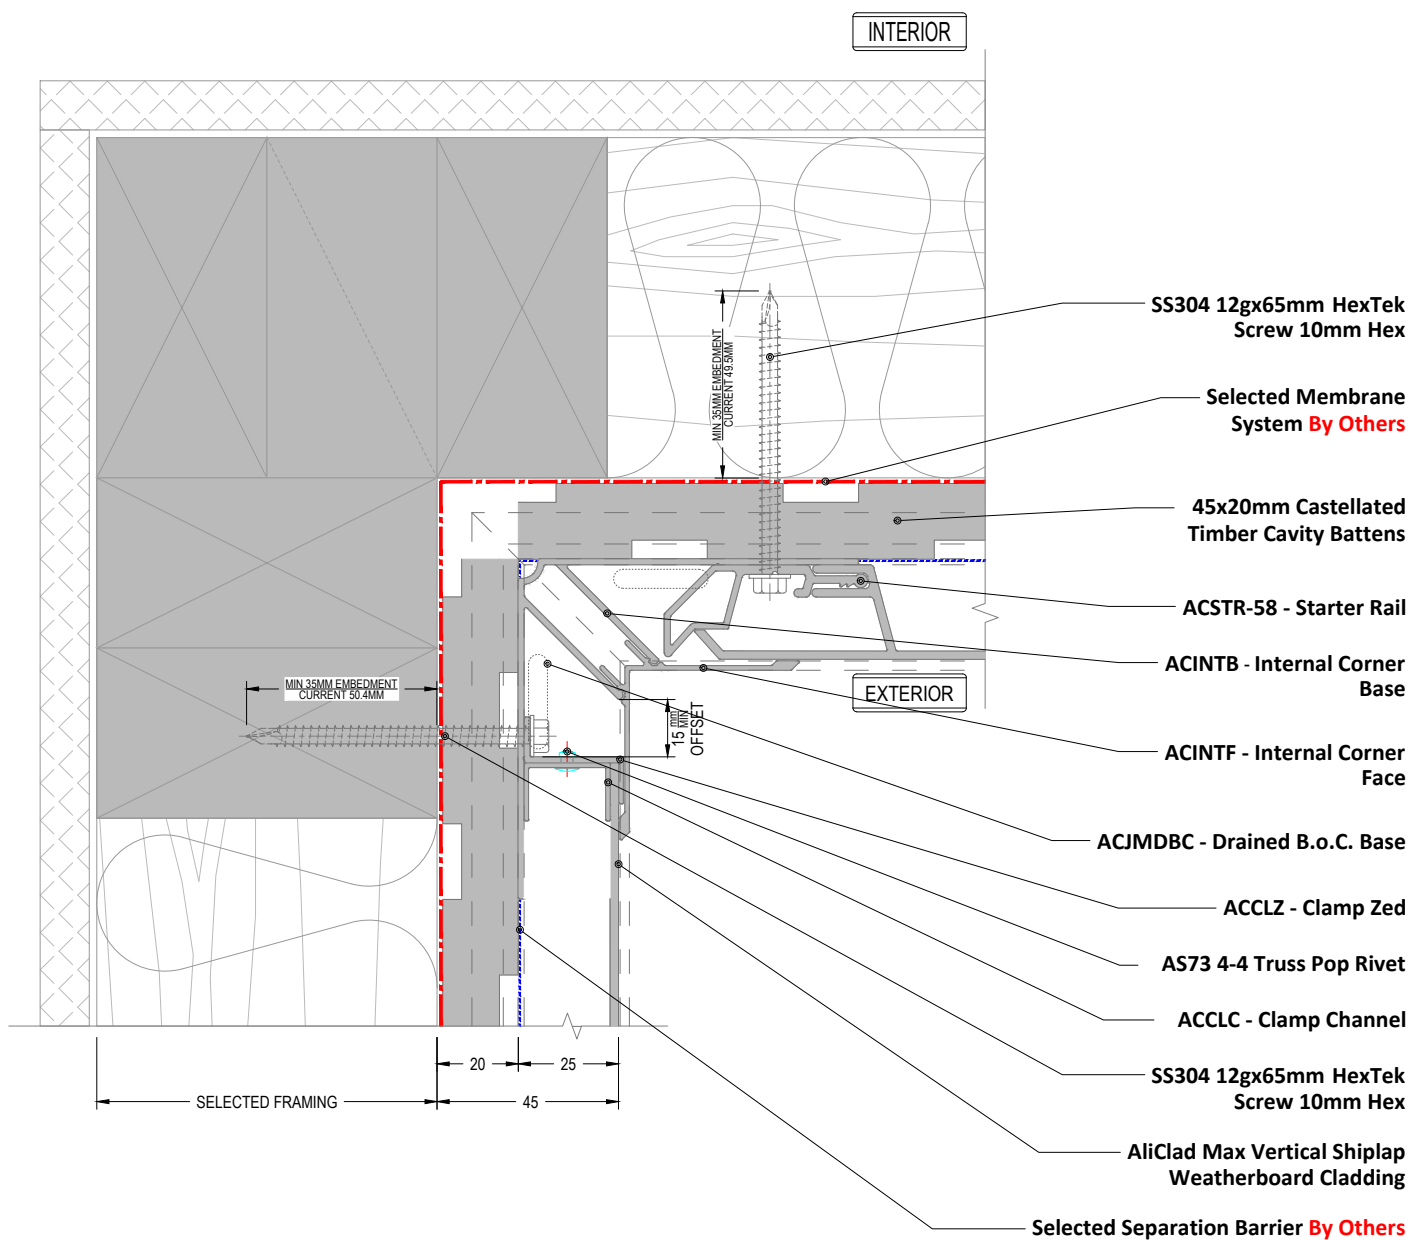

Detail Number

AC-V-TB-1.2

Version


[v2.3]

Internal Corner



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

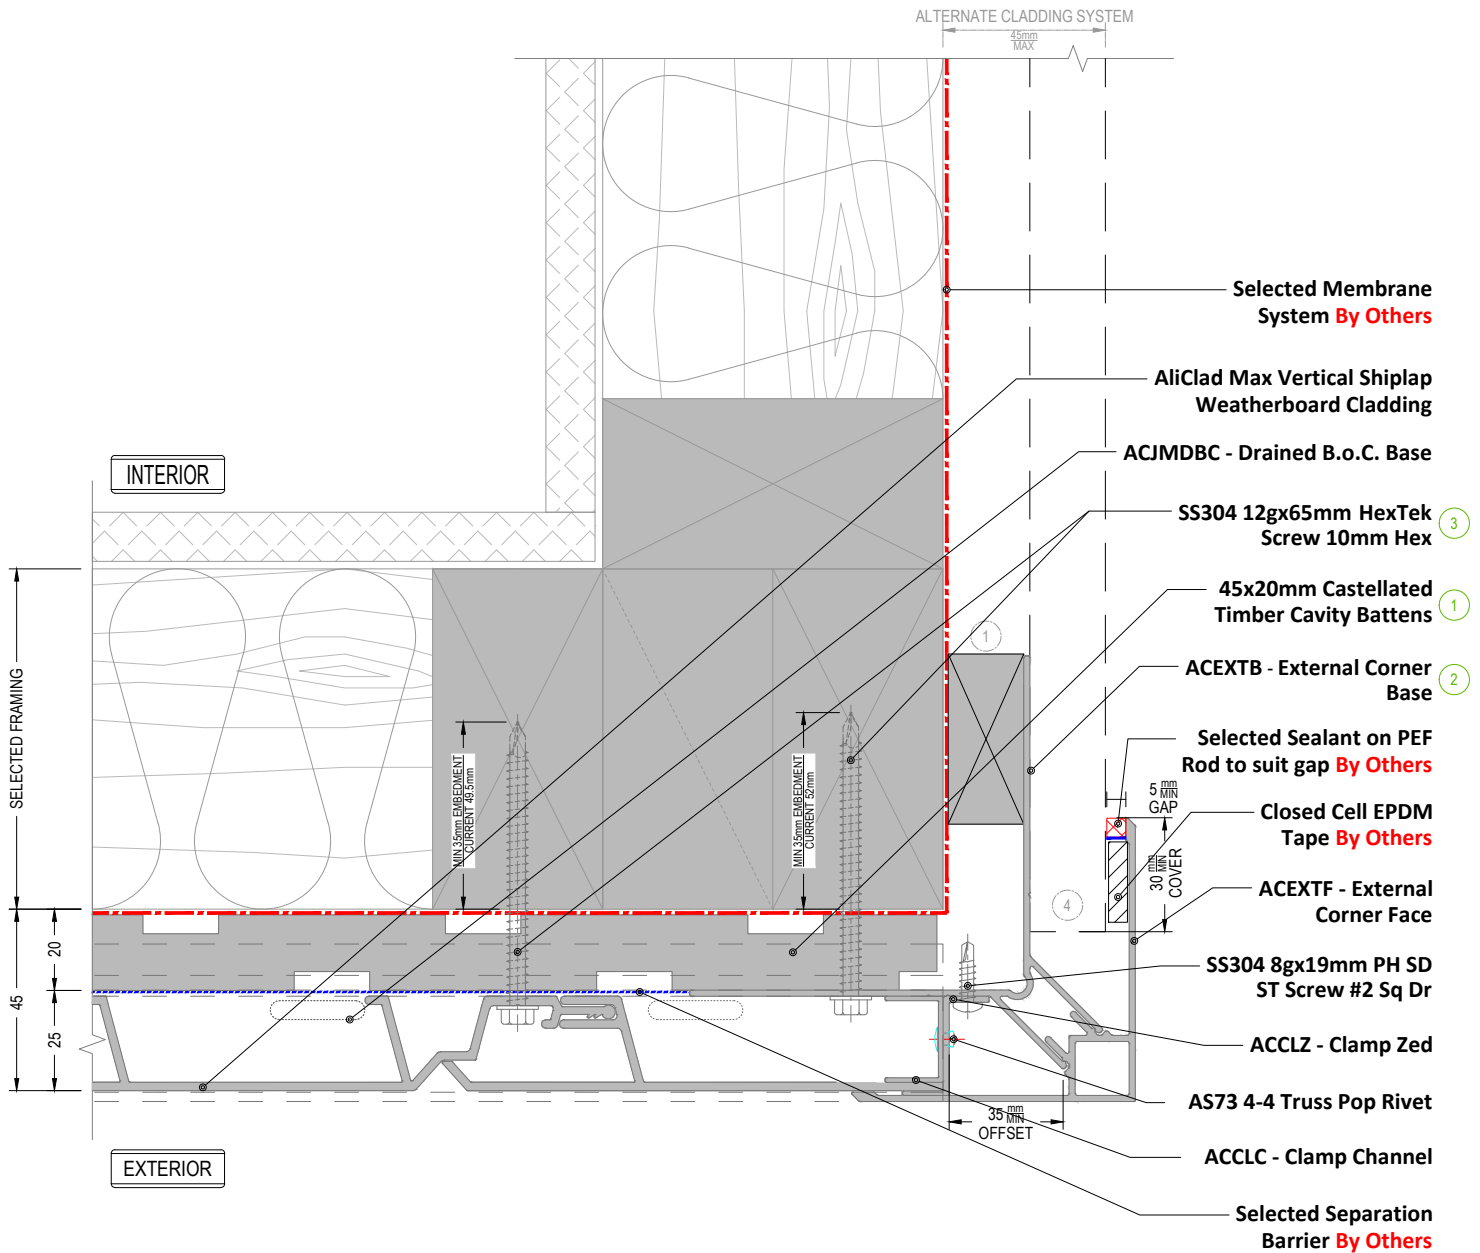

NOTE
ACJMDBC - Drained B.O.C. Base Shown in dashed lines

SEQUENCE OF INSTALLATION

- 1 45x20mm Castellated Timber Cavity Battens
- 2 External Corner Base
- 3 SS304 12gx65mm HexTek Screw
- 4 Alternate Cladding Exterior
- 1 Alternate Support Structure

Detail Number

Version

AC-V-TB-1.3


[v2.1]

Ext Cnr_SML Cladding Type



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

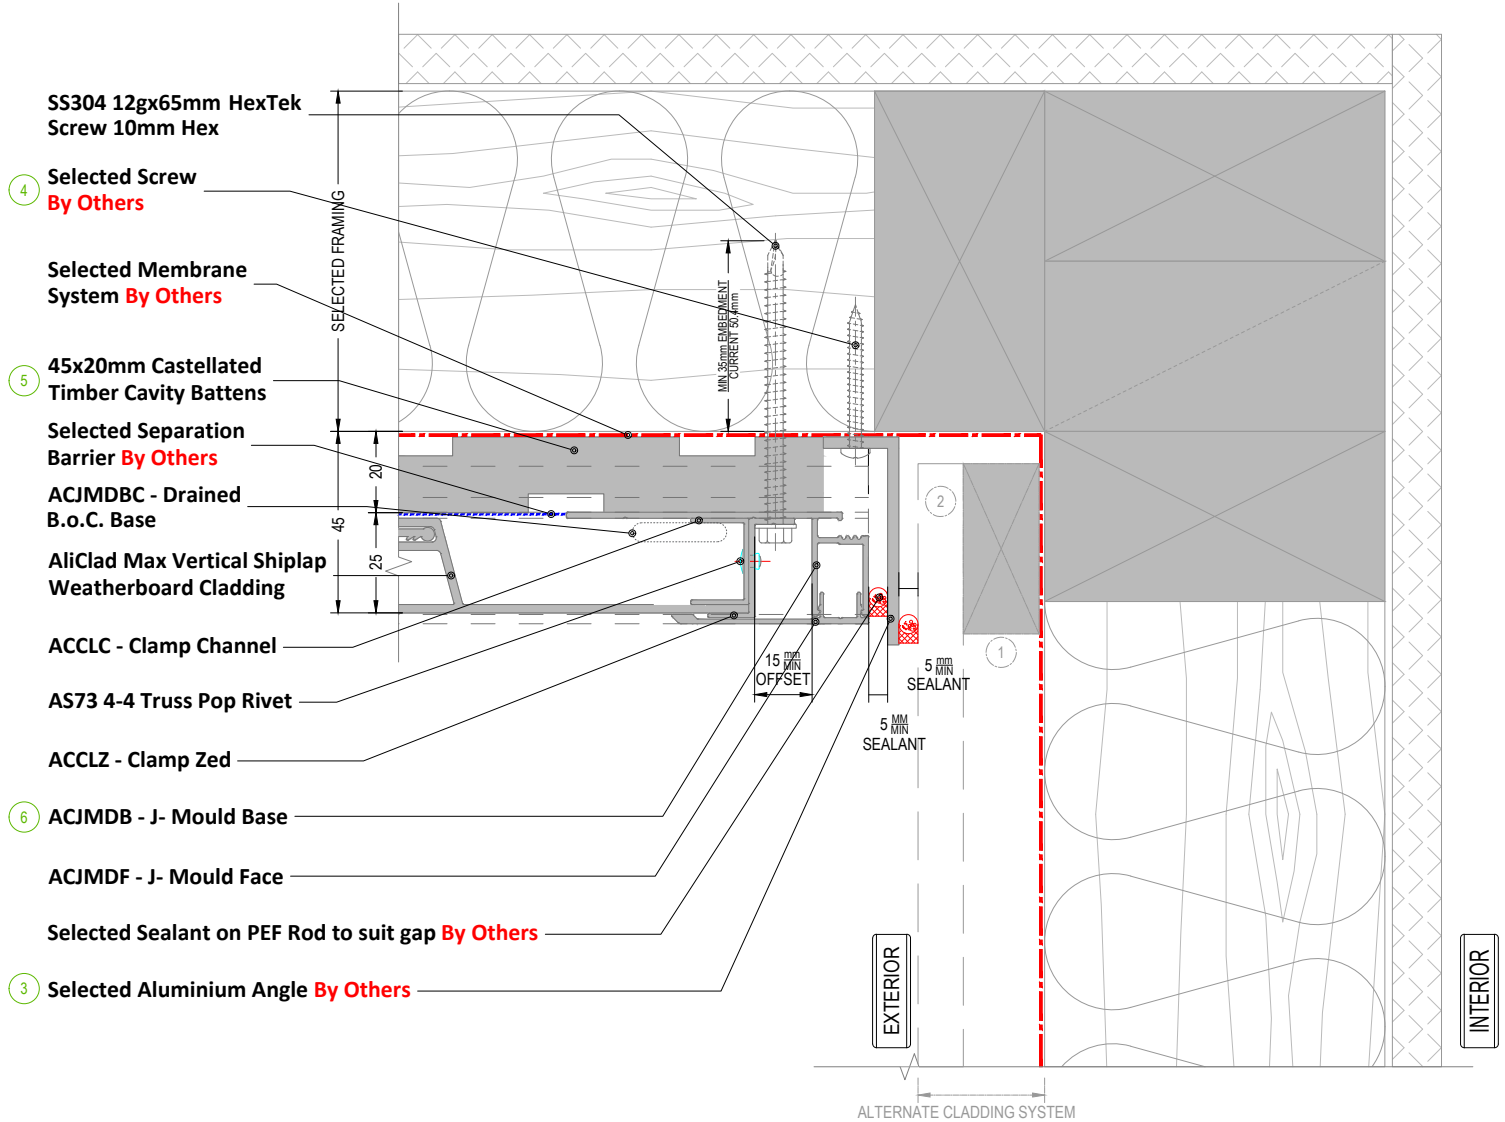

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines

NOTE 2
Flashings and Angles are not included in the system

SEQUENCE OF INSTALLATION

- | | | | |
|---|---|---|---------------------------------|
| 1 | Alternate Support Structure | 2 | Alternate Cladding Exterior |
| 3 | Selected Aluminium Angle By Others | 4 | Selected Screw By Others |
| 5 | 45x20mm Castellated Timber Cavity Battens | 6 | ACJMDB - J- Mould Base |

Detail Number

AC-V-TB-1.4

Version


[v2.3]

Int Cnr_SML Cladding Type



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

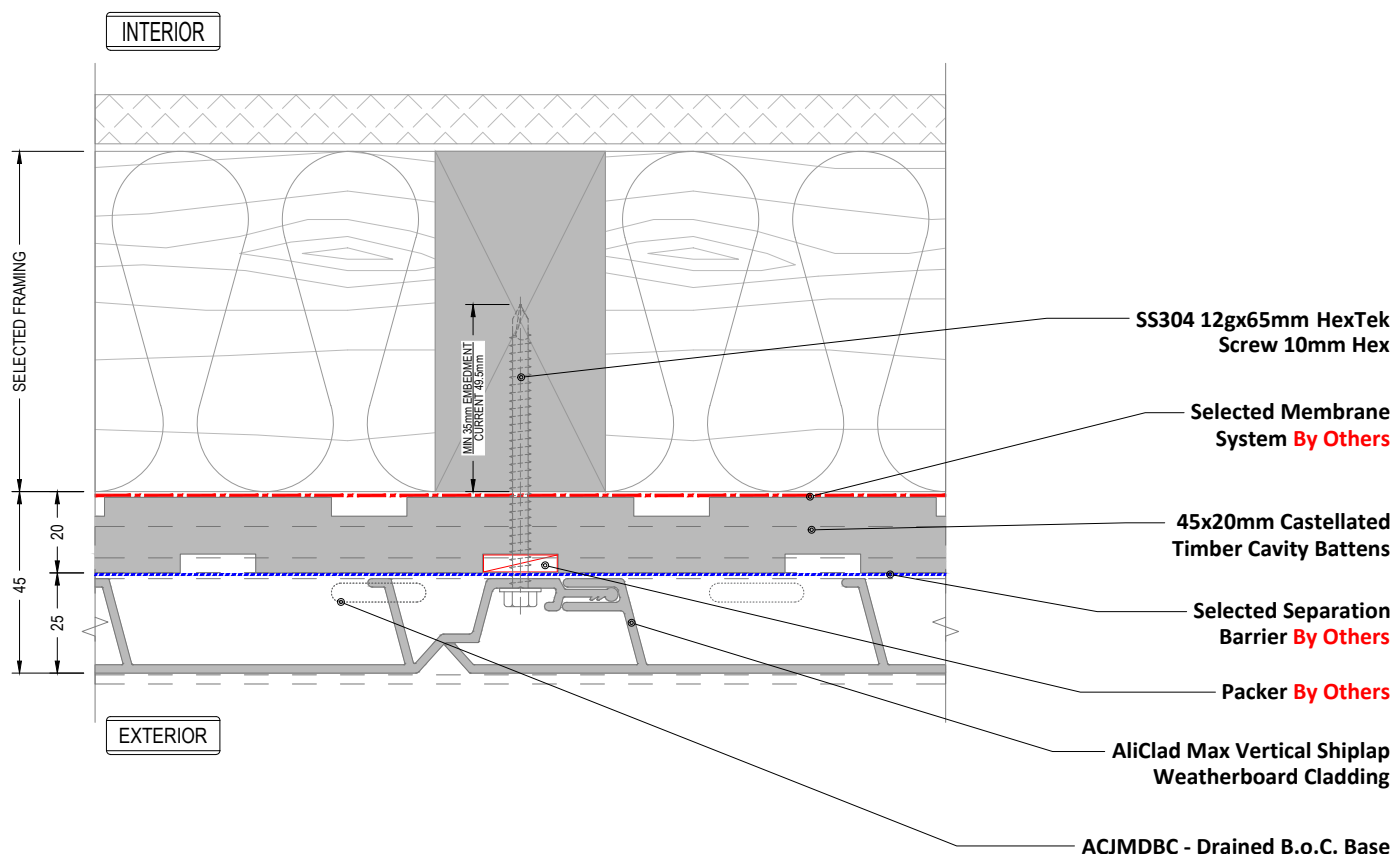

Vert. Joint_Typical

Detail Number

AC-V-TB-2.1


Version

[v2.3]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

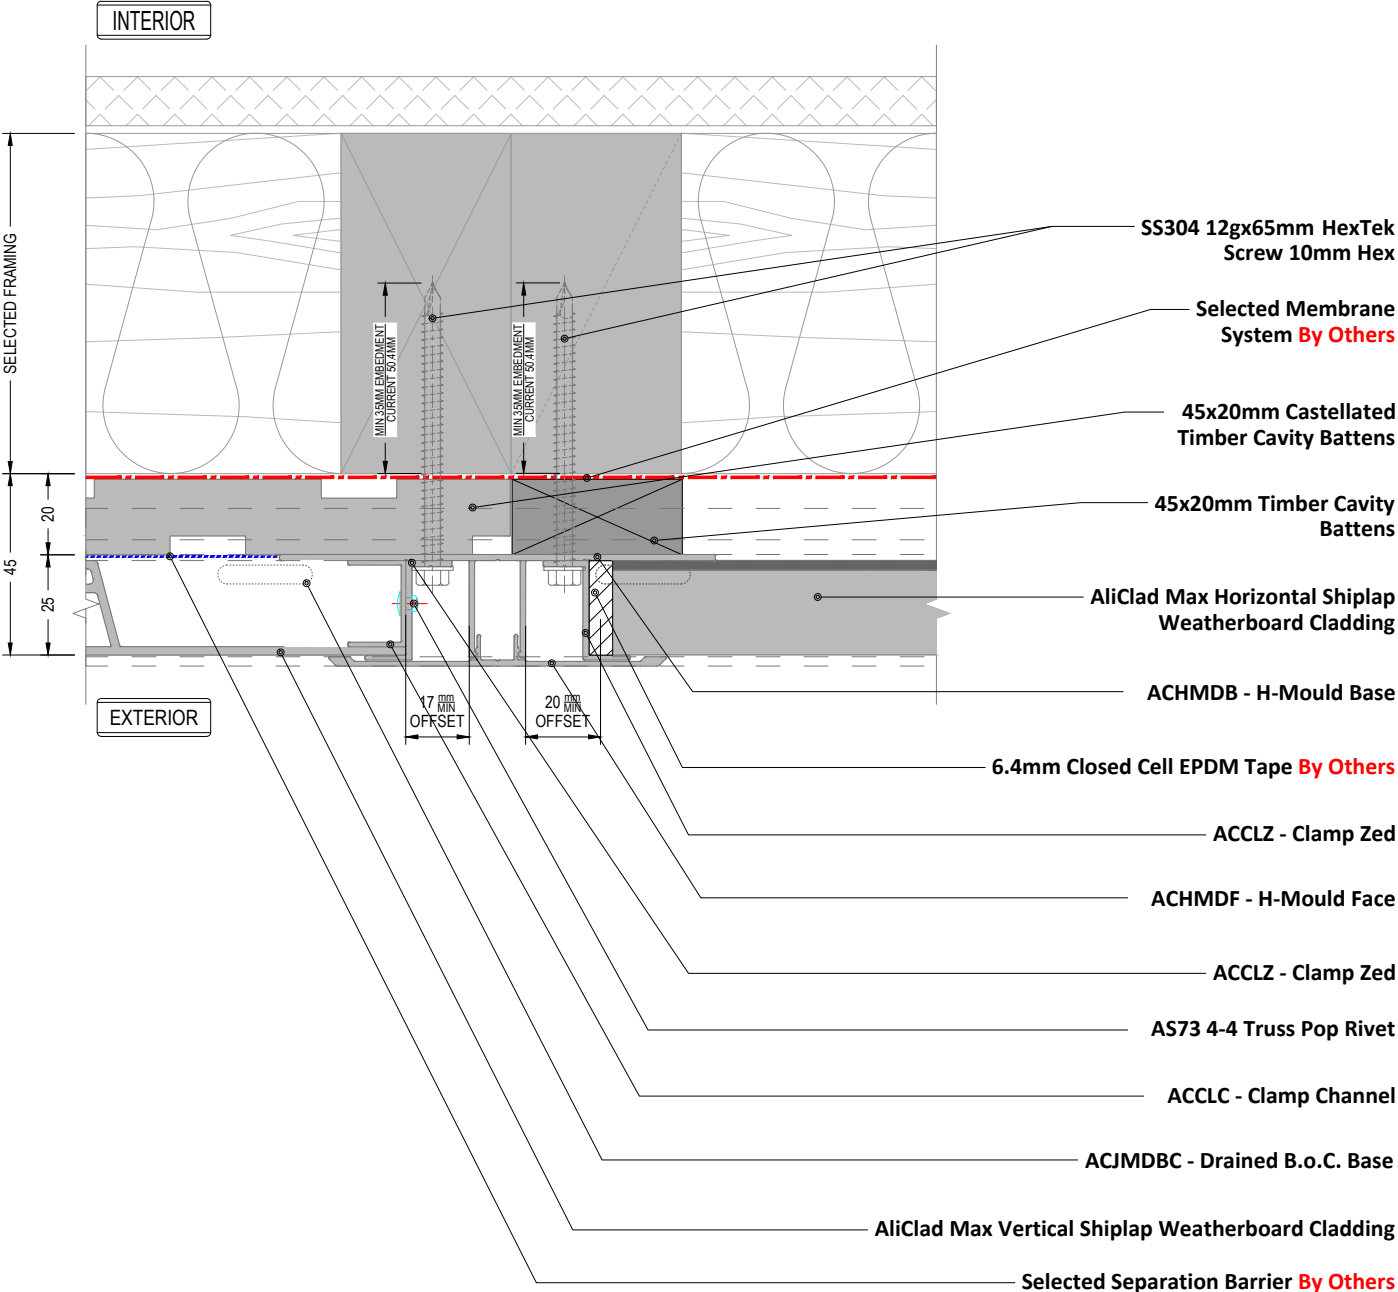

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines


NOTE 2
Additional Framing is required at junction of cladding types to ensure adequate fixing

Vert. Joint_Orientation Change

Detail Number
AC-V-TB-2.2

Version
[v2.3]

ALICLAD MAX

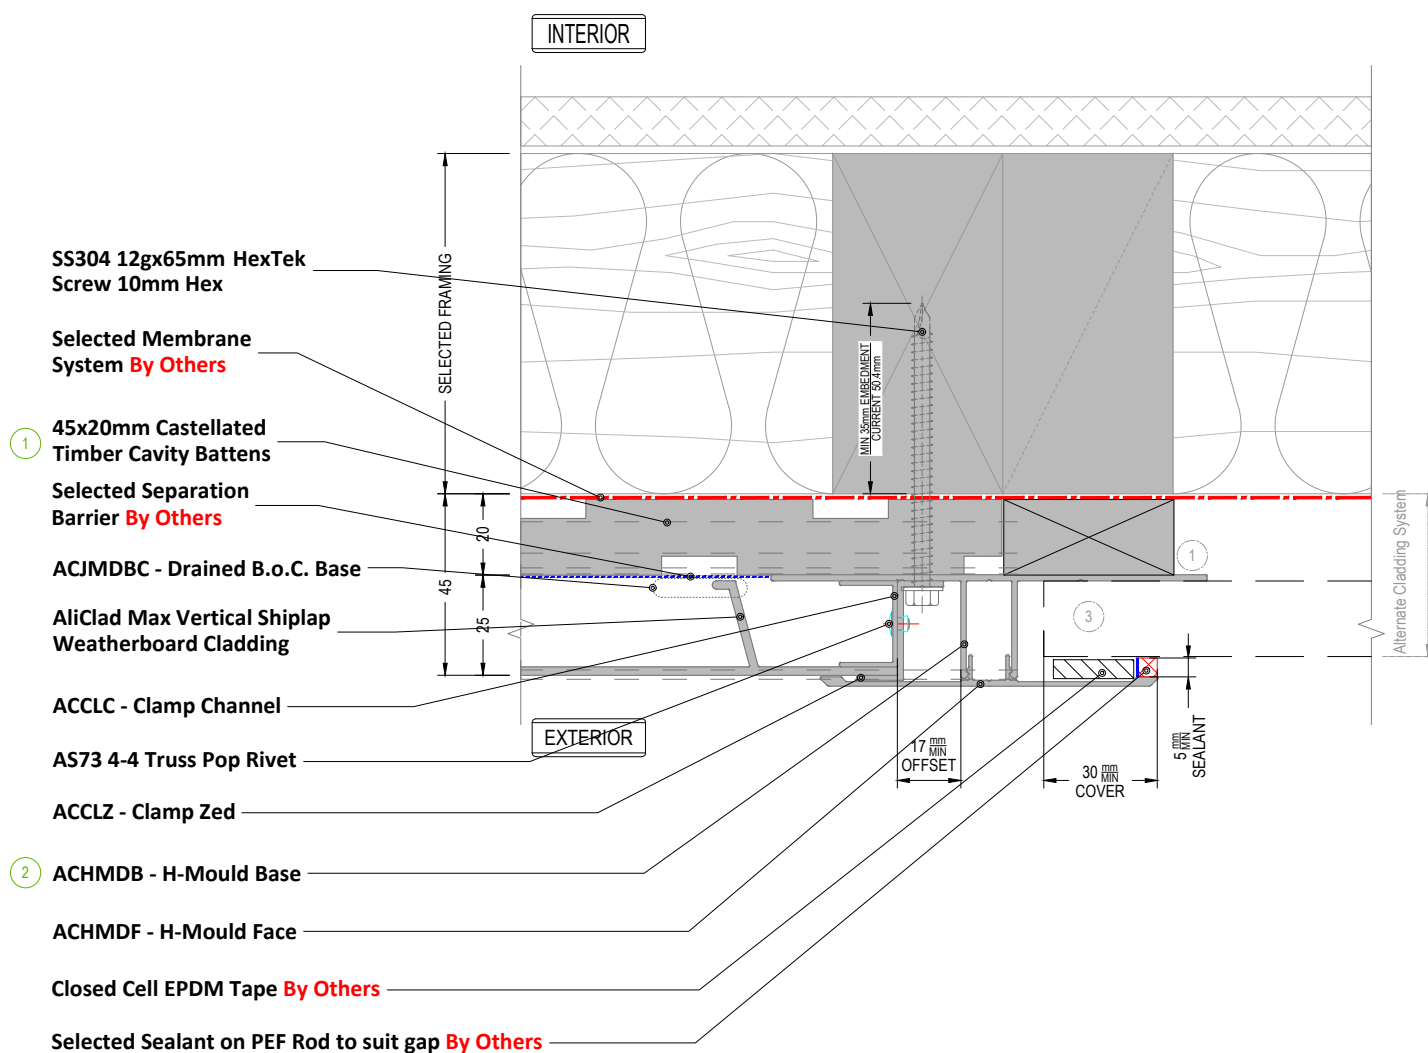

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines

NOTE 2
Additional Framing is required at junction of cladding types to ensure adequate fixing

SEQUENCE OF INSTALLATION

- 1 45x20mm Castellated Timber Cavity Battens
- 2 ACHMDB - H-Mould Base
- 3 Alternate Support Structure
- 3 Alternate Cladding Exterior

Detail Number

AC-V-TB-2.3

Version


[v2.3]

Vert. Joint_SML Cladding Type



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

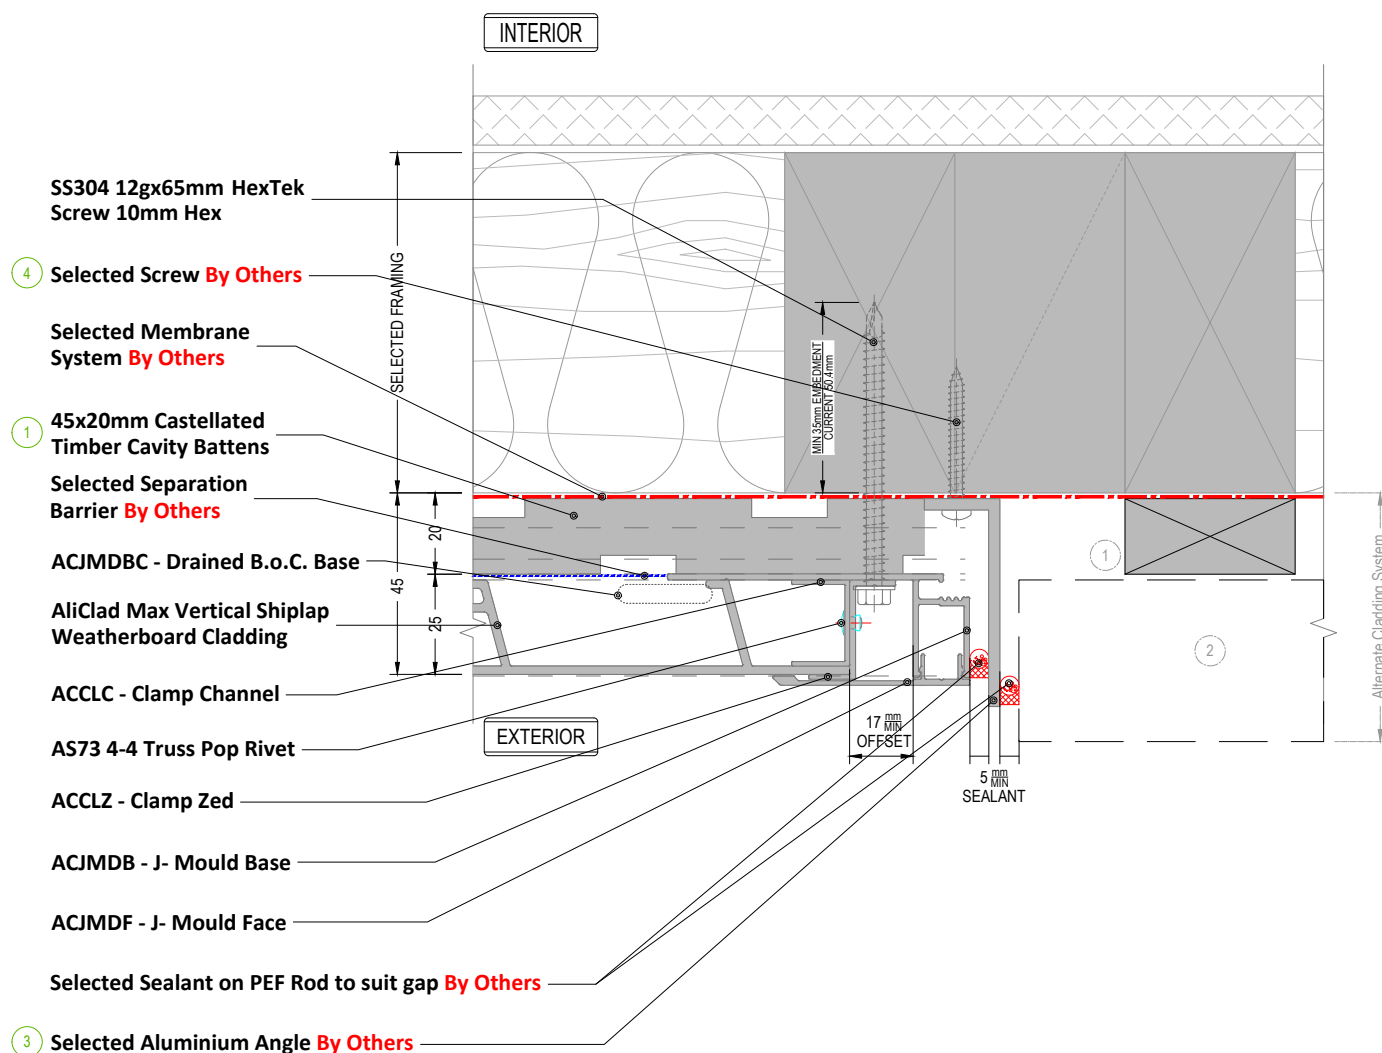

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines
NOTE 2
Additional Framing is required at junction of
cladding types to ensure adequate fixing
NOTE 3
Flashings and Angles are not included in the system

SEQUENCE OF INSTALLATION

- 1 45x20mm Castellated Timber Cavity Battens
- 2 Alternate Cladding Exterior
- 3 Selected Aluminium Angle By Others
- 4 Selected Screw By Others
- 1 Alternate Support Structure

Detail Number

AC-V-TB-2.4

Version


[v2.3]

Vert. Joint_LRG Cladding Type



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

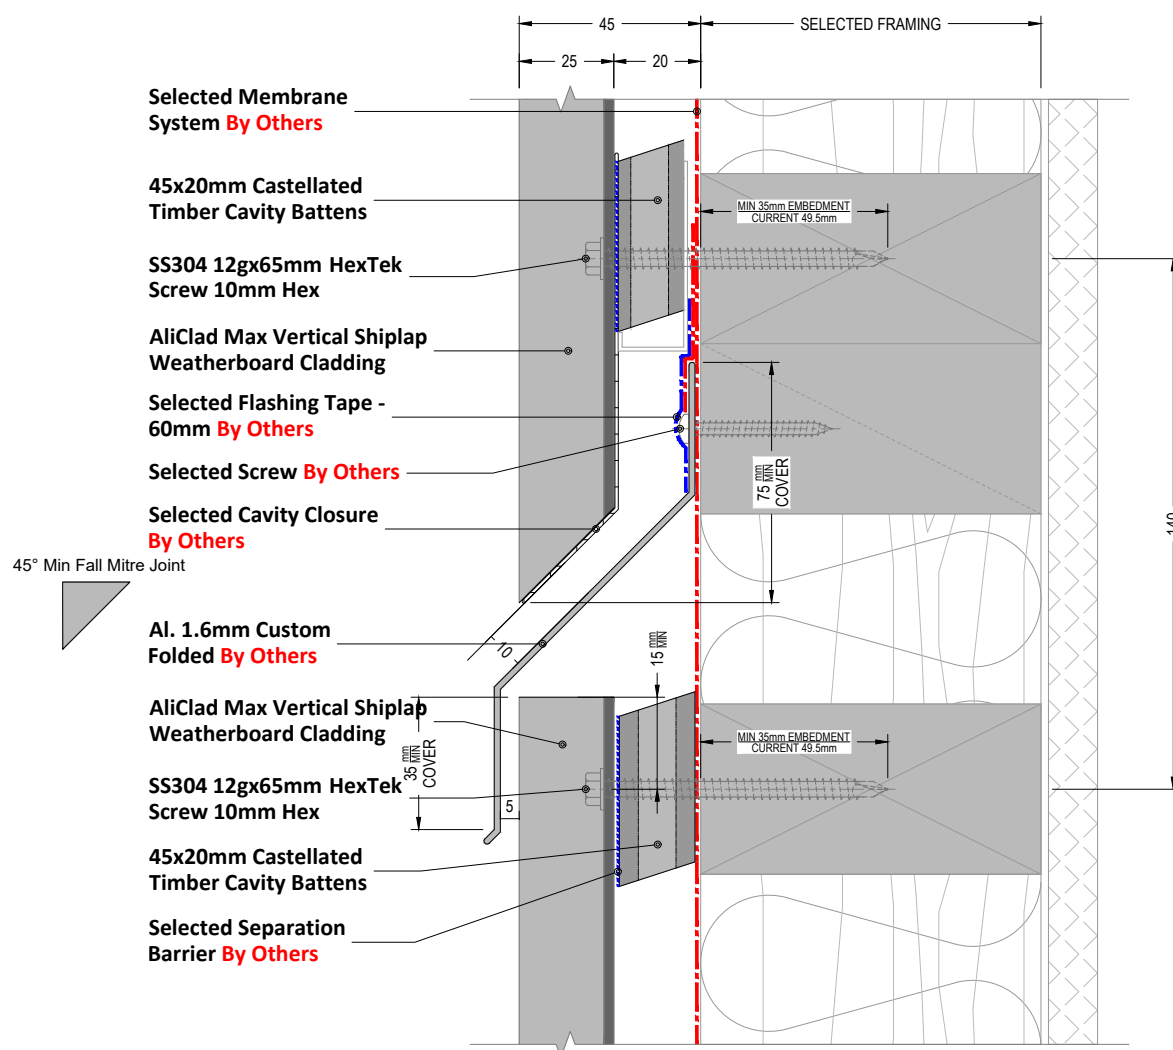

NOTE 1

Flashings and Angles are not included in the system

NOTE 2

Cavity Closures are not included in the system

Detail Number

AC-V-TB-3.1

Version


[v2.3]

Hori. Joint_Typical



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

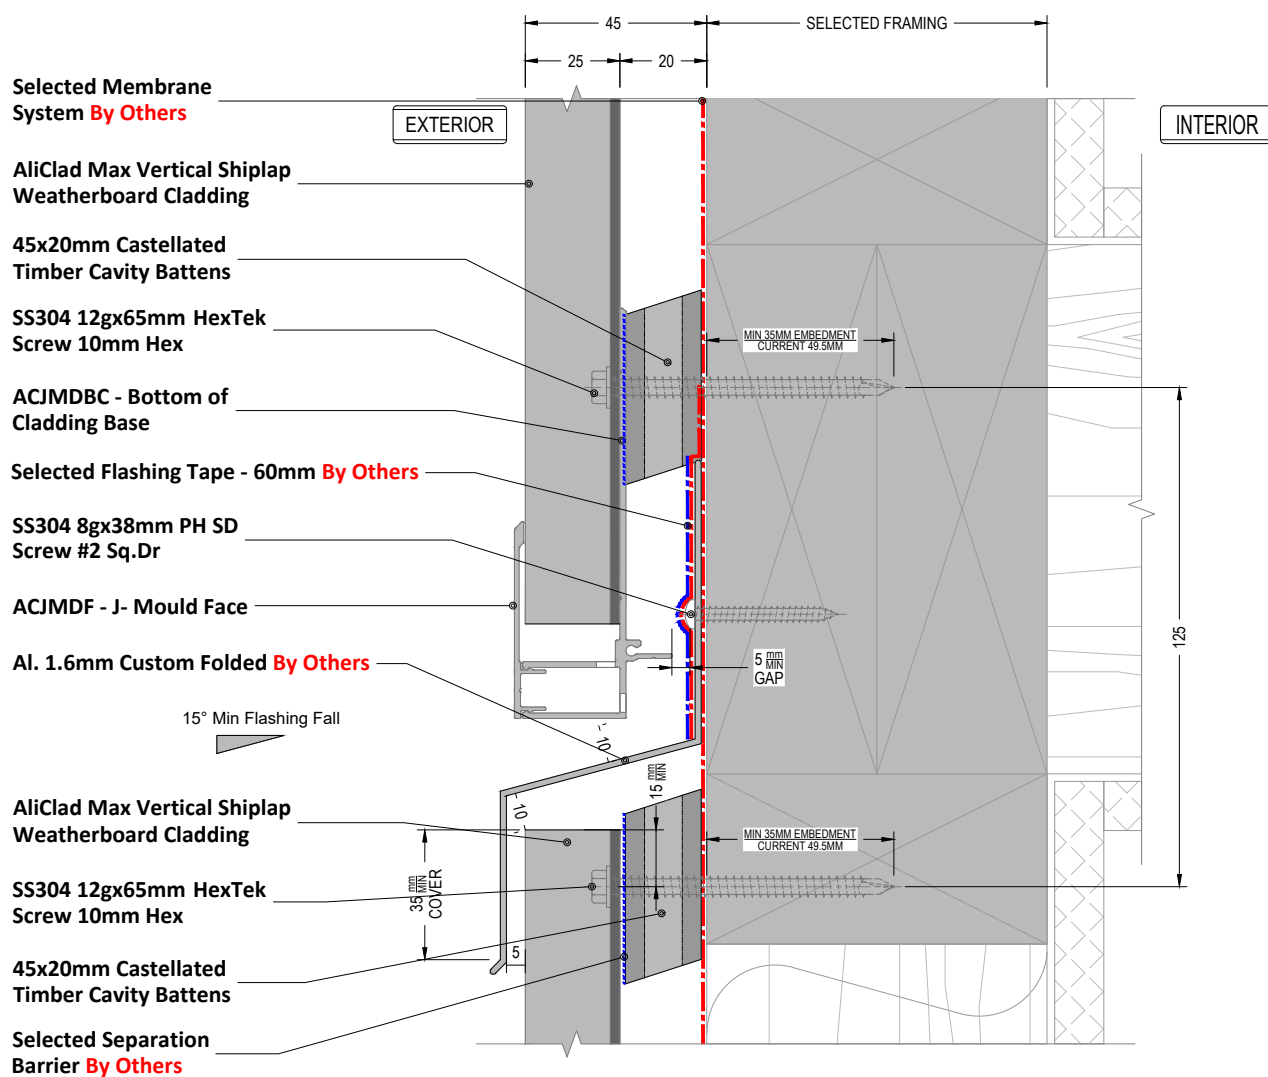

NOTE

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-3.2

Version


[v2.3]

Interstorey Joint



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

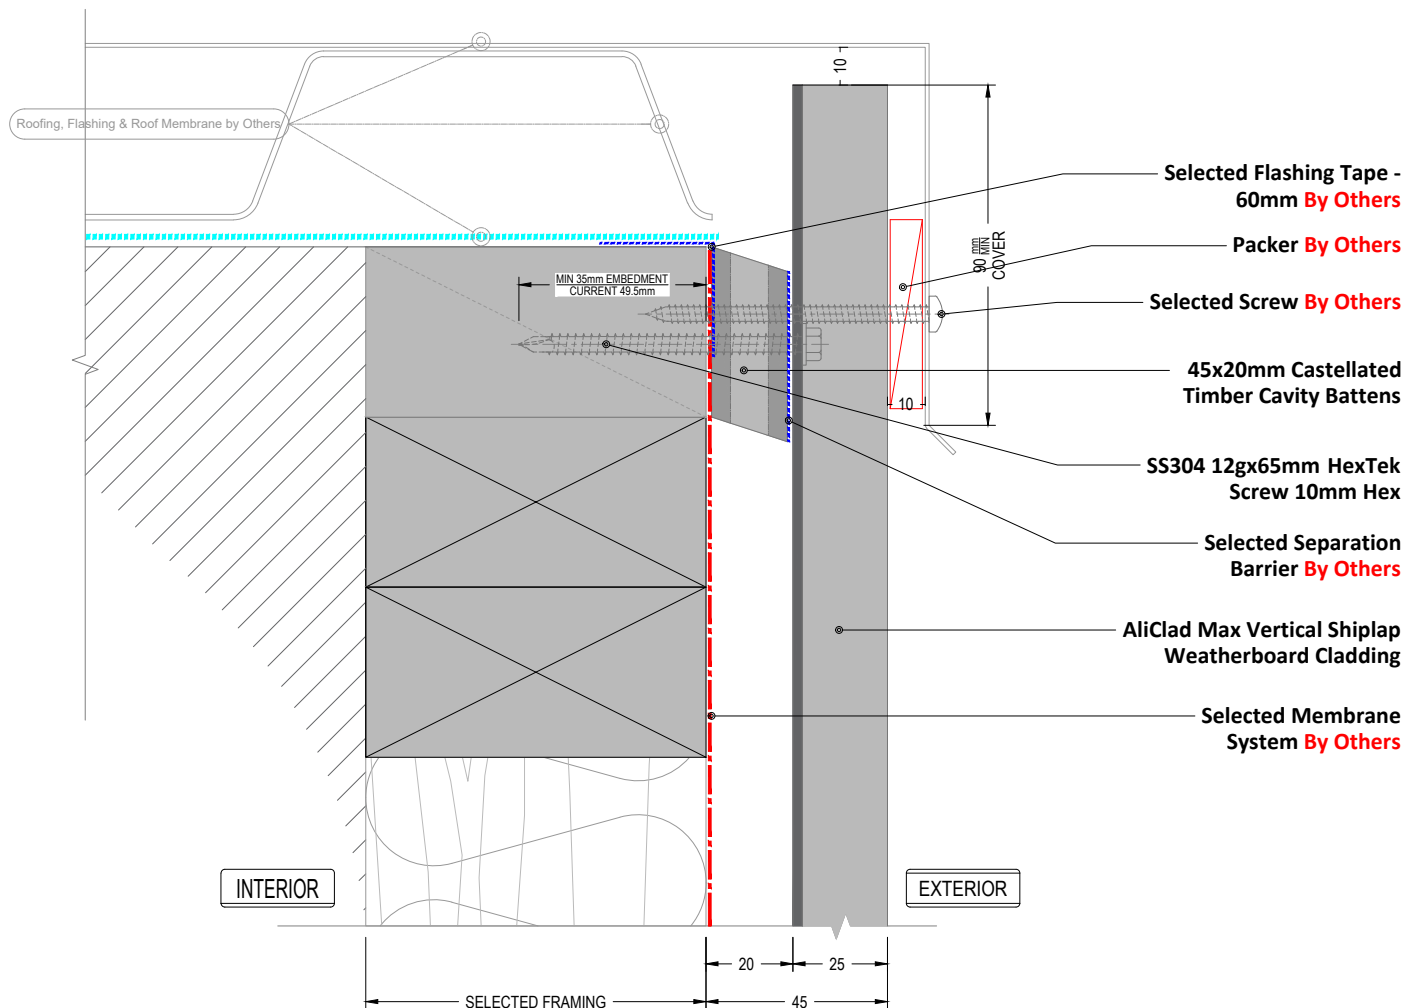

NOTE 1
ACJMDBC - Drained B.O.C. Base Shown in dashed lines

NOTE 2
Additional Framing is required at junction of cladding types to ensure adequate fixing

Detail Number

AC-V-TB-4.1

Version


[v2.3]

TOP Cladding_Parapet



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

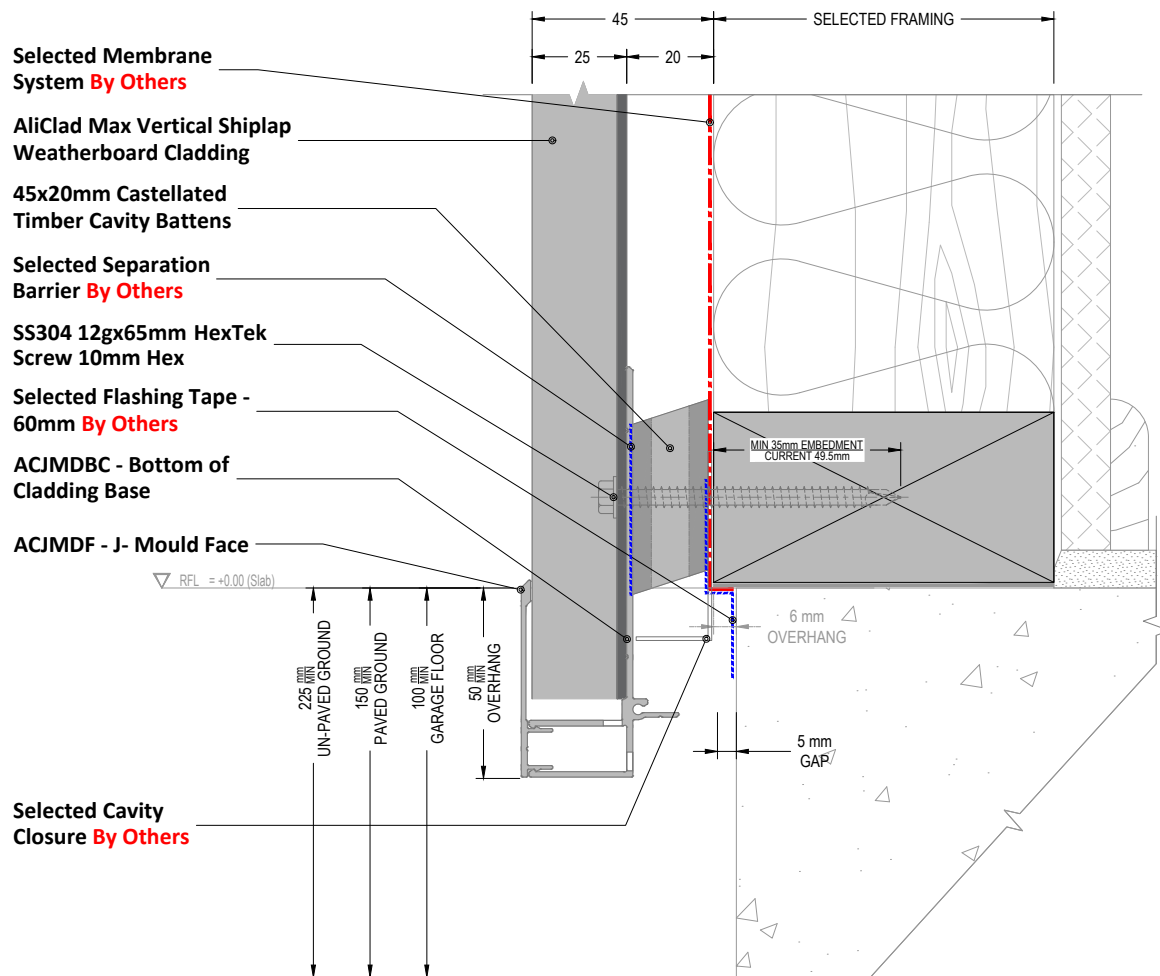

NOTE

Cavity Closer are not included in the system

Detail Number

AC-V-TB-4.2

Version


[v2.3]

BTM Cladding_G.L

THE BUILDING AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

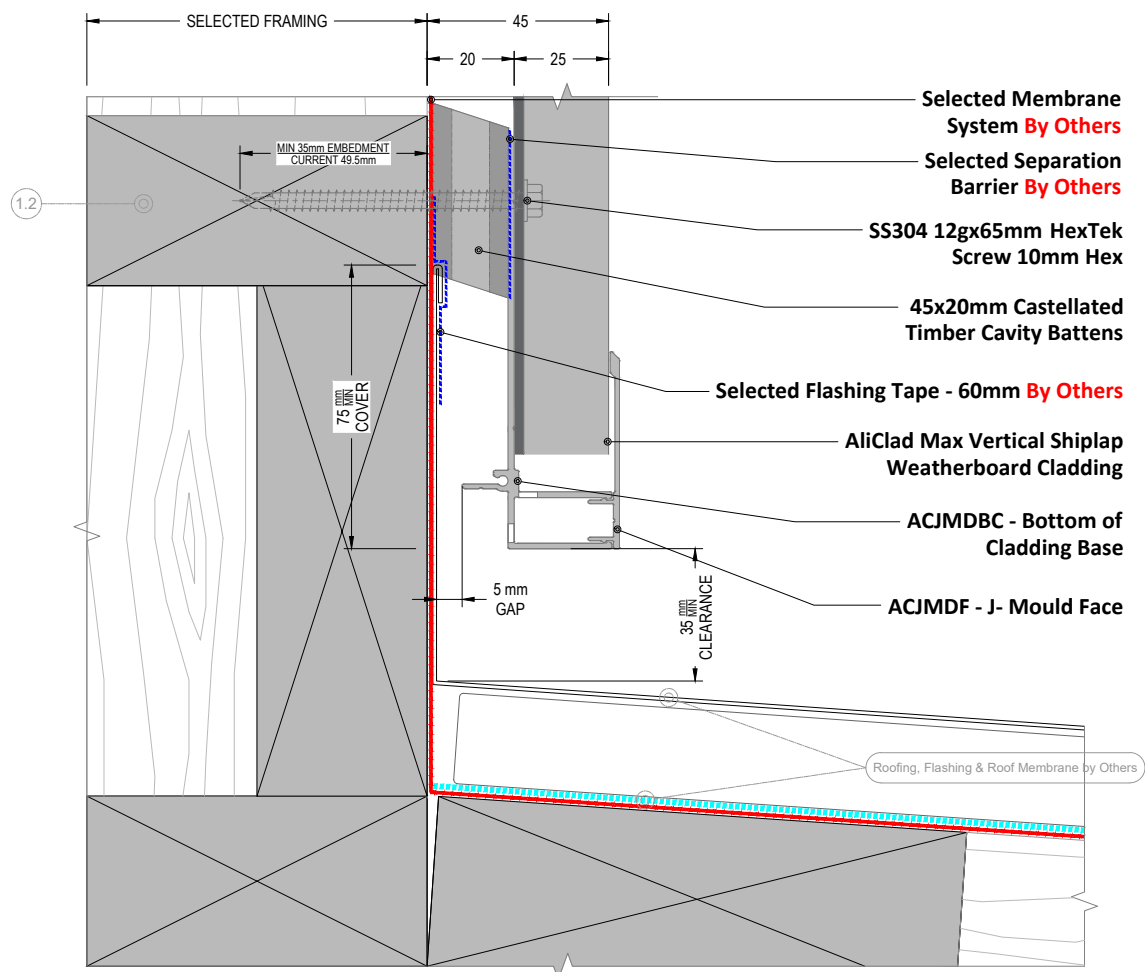

BTM Cladding_ Apron Roof

Detail Number

AC-V-TB-4.4


Version

[v2.3]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

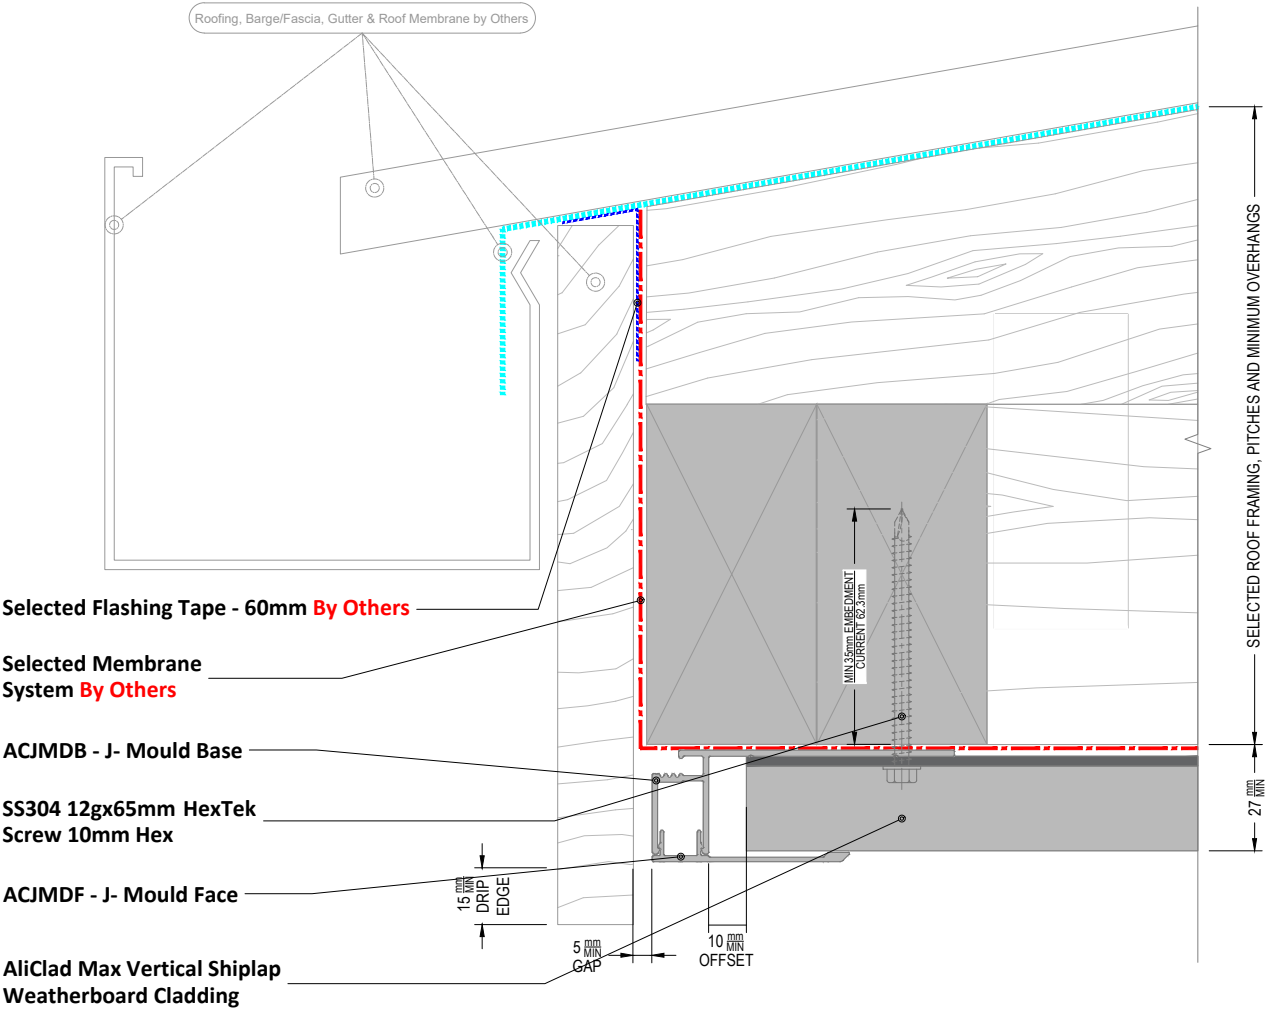

NOTE

Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use.
-By Others


Detail Number

Version

AC-V-TB-4.8

[v2.3]

ALICLAD MAX

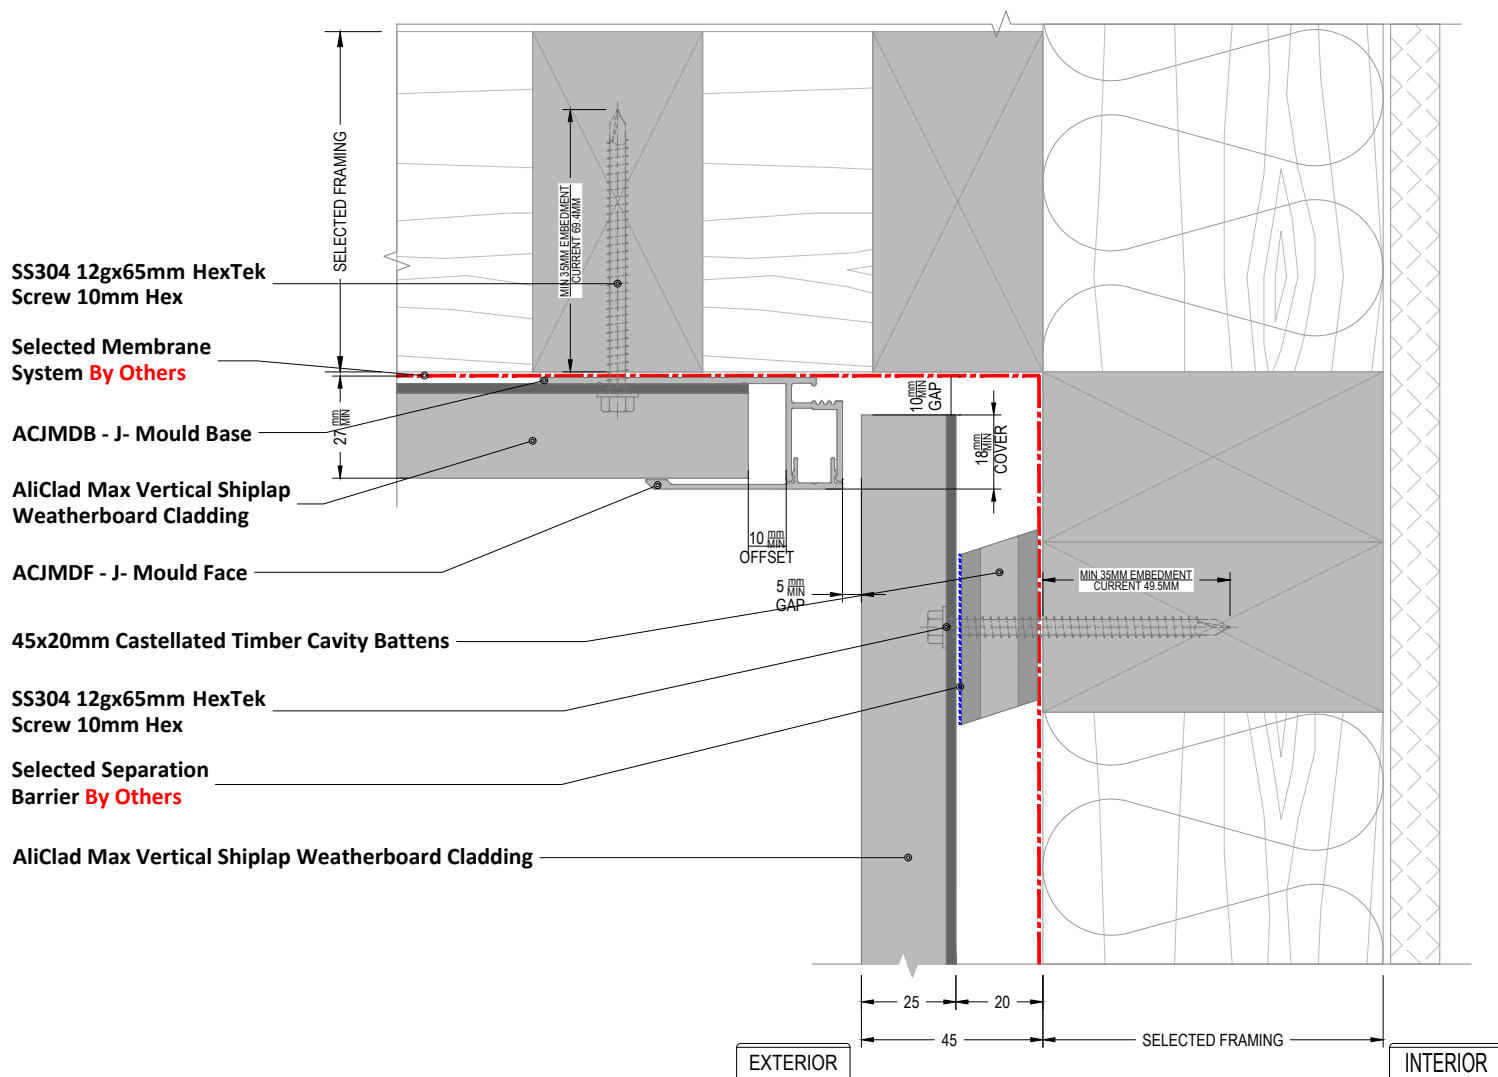

NOTE

Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use.

-By Others

Detail Number

AC-V-TB-5.1

Version


[v2.3]

Wall BLW_Soffit <90°



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

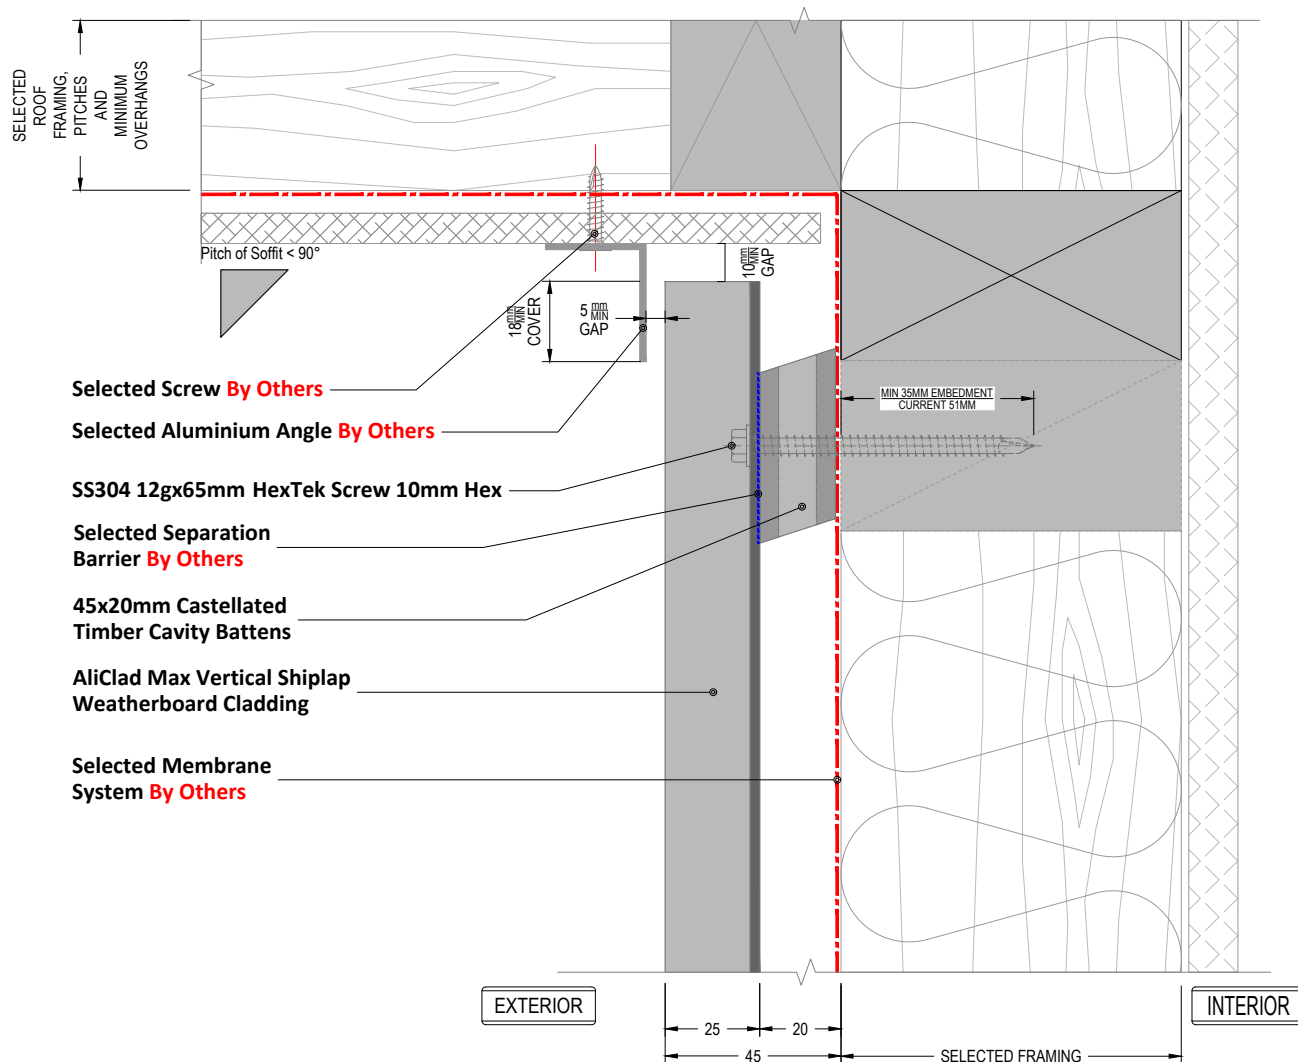

Selected Screw **By Others**

Selected Aluminium Angle **By Others**

SS304 12gx65mm HexTek Screw 10mm Hex

Selected Separation Barrier **By Others**

45x20mm Castellated Timber Cavity Battens

AliClad Max Vertical Shiplap Weatherboard Cladding

Selected Membrane System **By Others**

Selected Aluminium Angle **By Others**

NOTE 1
Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use. -By Others

NOTE 2
Flashings and Angles are not included in the system

OPTION 2

Detail Number

AC-V-TB-5.6

Version


[v2.3]

Wall BLW_Flat Sheet Soffit <90°

THE BUILDING AGENCY

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

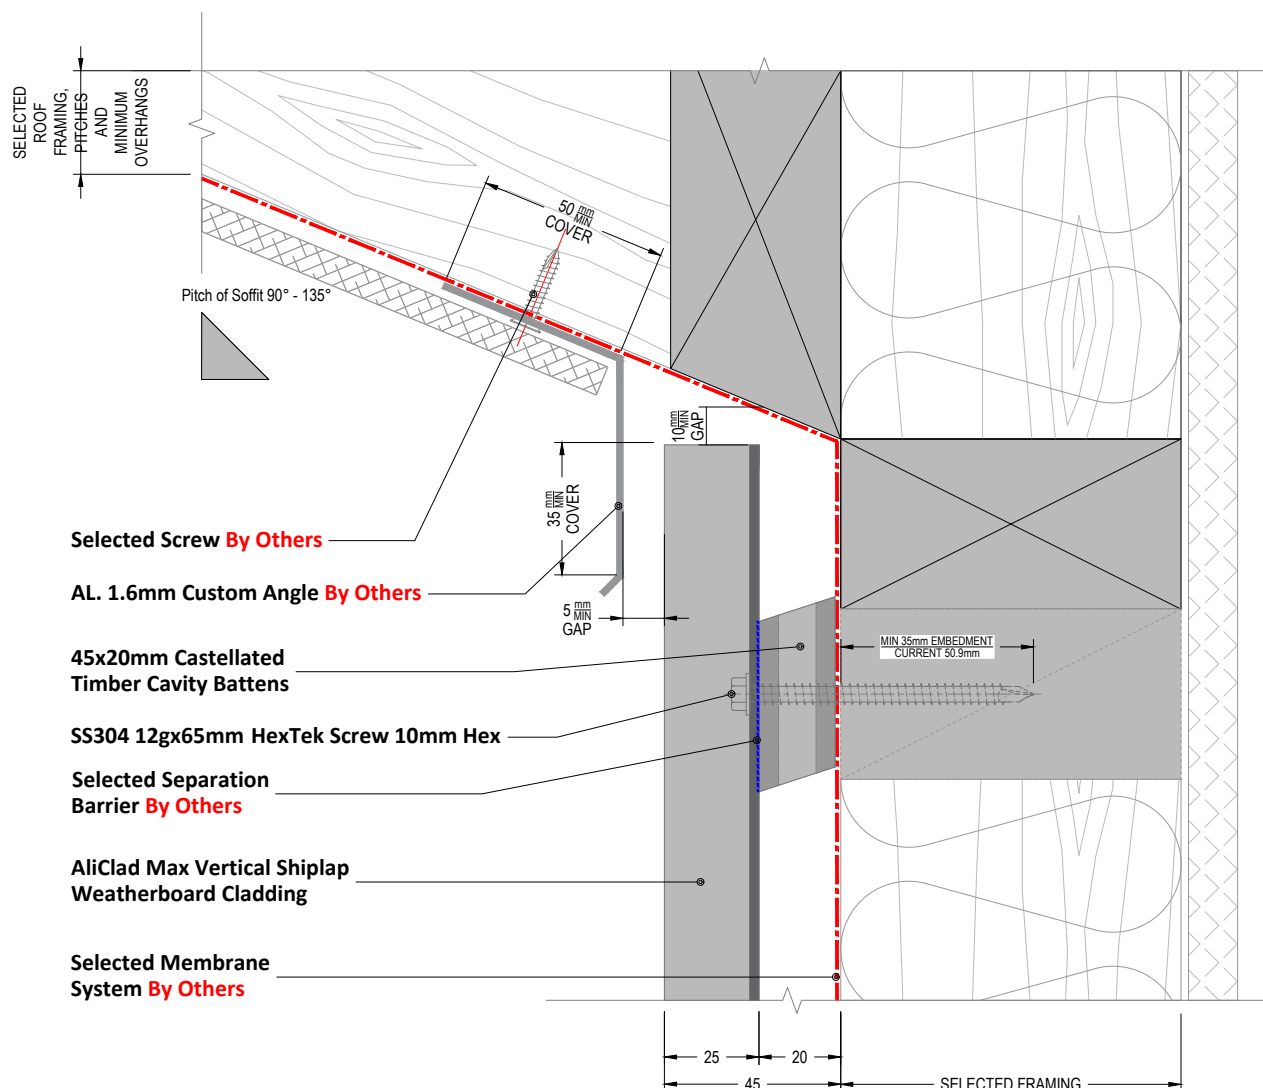

NOTE 1

Weathering membrane under soffit is not required, but is recommendable for air barrier performance when a rigid wind barrier is not in use. -By Others

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-5.8

Version

[v2.3]

Wall BLW_Flat Sheet Soffit >90°



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Wet Seal Adhesion Tape

By Others

Sill Tape - 150mm

By Others

SS304 8gx38mm PH SD
Screw #2 Sq.Dr

SS304 12gx65mm HexTek
Screw 10mm Hex

ACJMC - Jamb Clip

Selected Sealant on
PEF Rod to suit gap By
Others

ACJMF - Jamb Flashing

Selected Membrane
System By Others

45x20mm Castellated
Timber Cavity Battens

Packer By Others

Selected Separation
Barrier By Others

AliClad Max Vertical Shiplap Weatherboard Cladding

ACJMDBC - Drained B.o.C. Base

ACJMDB - J- Mould Base

ACCLC - Clamp Channel

AS73 4-4 Truss Pop Rivet

ACCLZ - Clamp Zed

SS304 8gx19mm PH SD ST Screw #2 Sq Dr

ACJMDF - J- Mould Face

INTERIOR

SELECTED FRAMING

45

20

25

EXTERIOR

MIN 35MM EMBEDMENT
CURRENT 45MM

MIN 35MM EMBEDMENT
CURRENT 52MM

Jamb R/O - (Timber)

JAMB OPENING (DASHED LINES)

20mm MIN
WINDOW OFFSET

12mm
MIN
OFFSET

5mm
MIN
SEALANT

12mm
OFFSET

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

AC-V-TB-7.1

Version

[v2.3]

Window Jamb_Recessed

**THE
BUILDING
AGENCY**

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Selected Membrane System **By Others**

45x20mm Castellated Timber Cavity Battens

AliClad Max Vertical Shiplap Weatherboard Cladding

Selected Separation Barrier **By Others**

SS304 12gx65mm HexTek Screw
10mm Hex

Selected Flashing Tape - 60mm **By Others**

Selected Screw **By Others**


ACJMDBC - Bottom of Cladding Base

ACJMDF - J- Mould Face

Al. 1.6mm Custom Folded **By Others**

Sill Tape - 150mm **By Others**

Wet Seal Adhesion Tape **By Others**

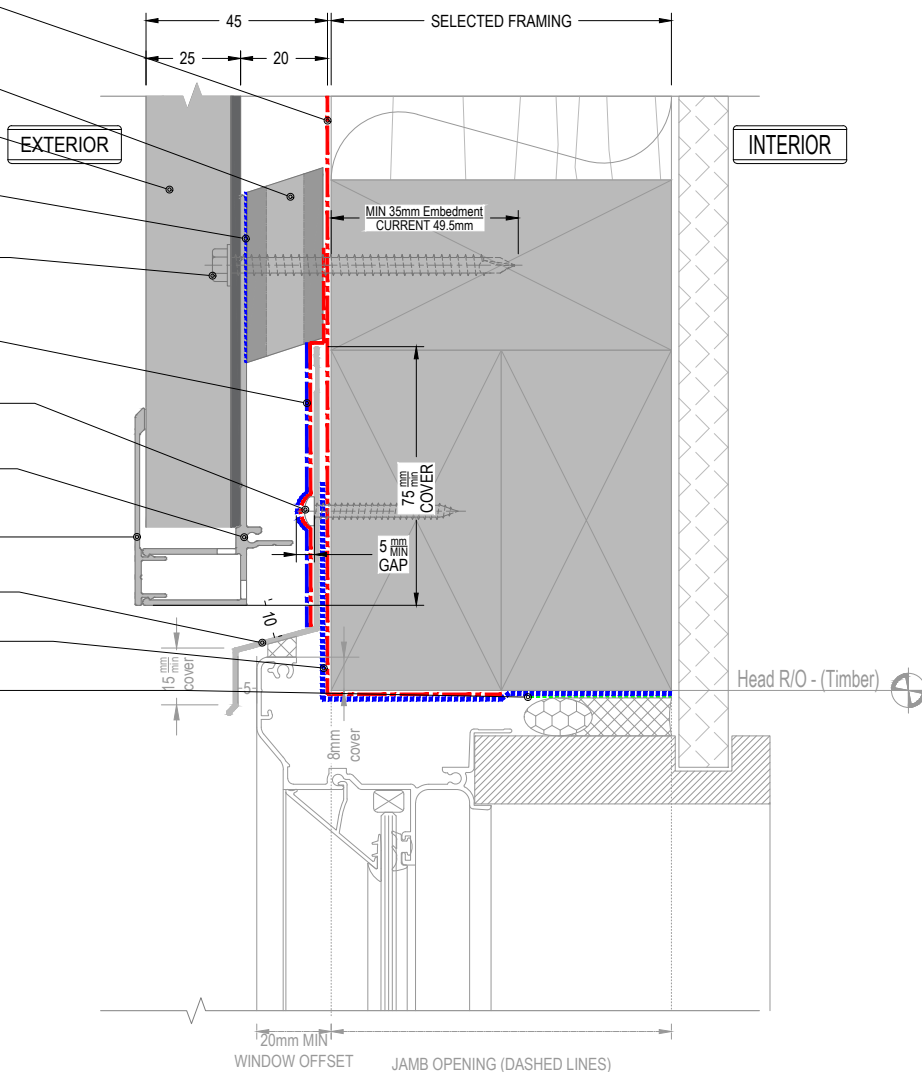

NOTE 1

Refer to drawing "7.1" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-7.2

Version


[v2.3]

Window Head_Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

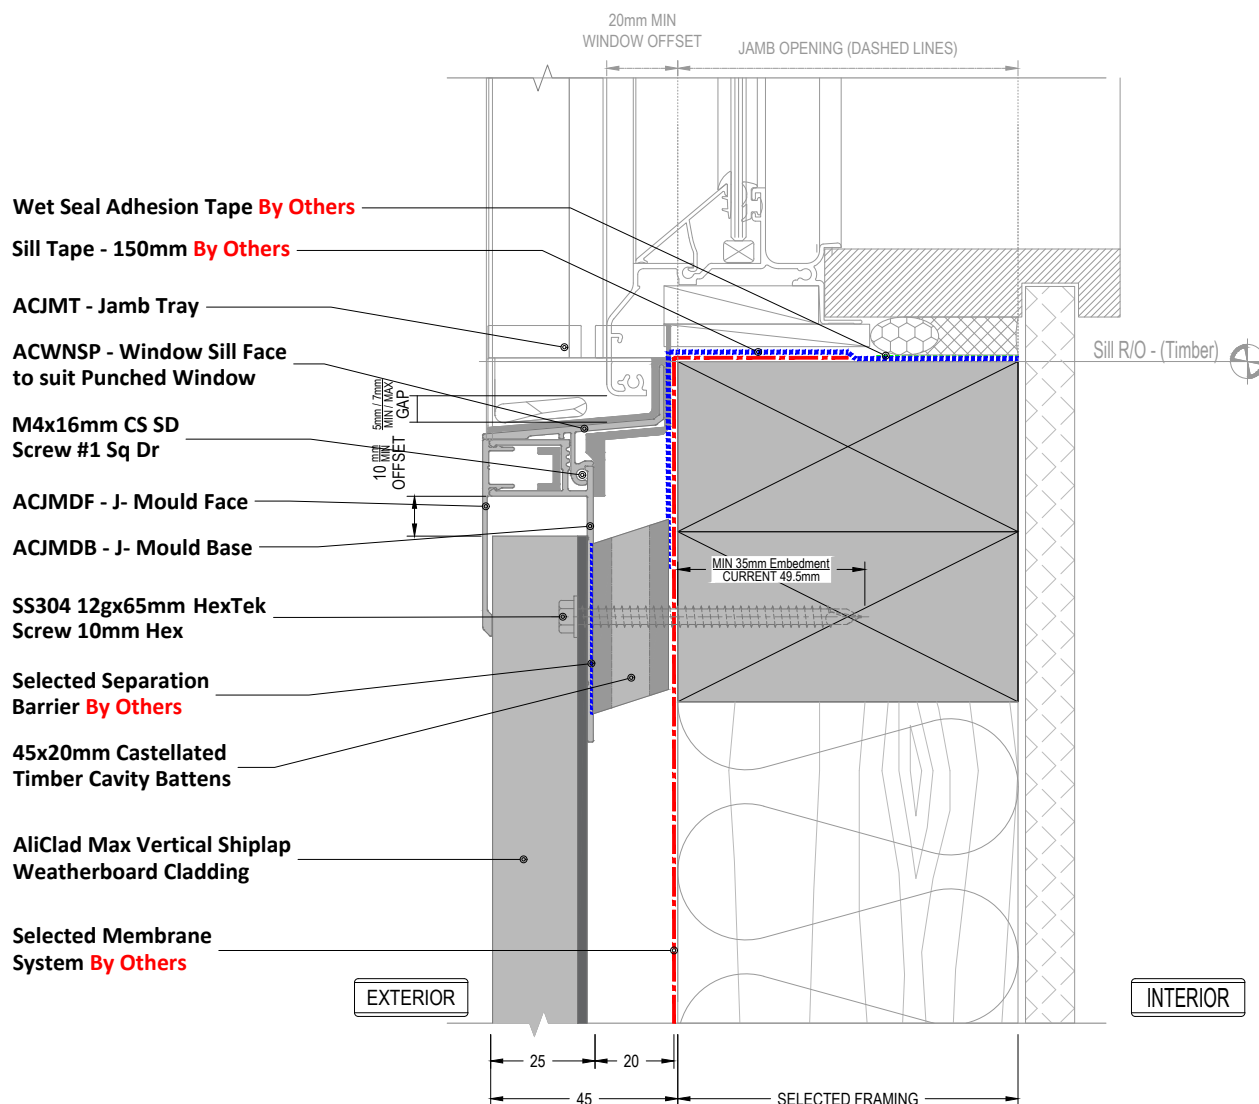

NOTE

Refer to drawing "7.1" for Sill/Jamb Junction

Detail Number

AC-V-TB-7.3

Version


[v2.3]

Window Sill_Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

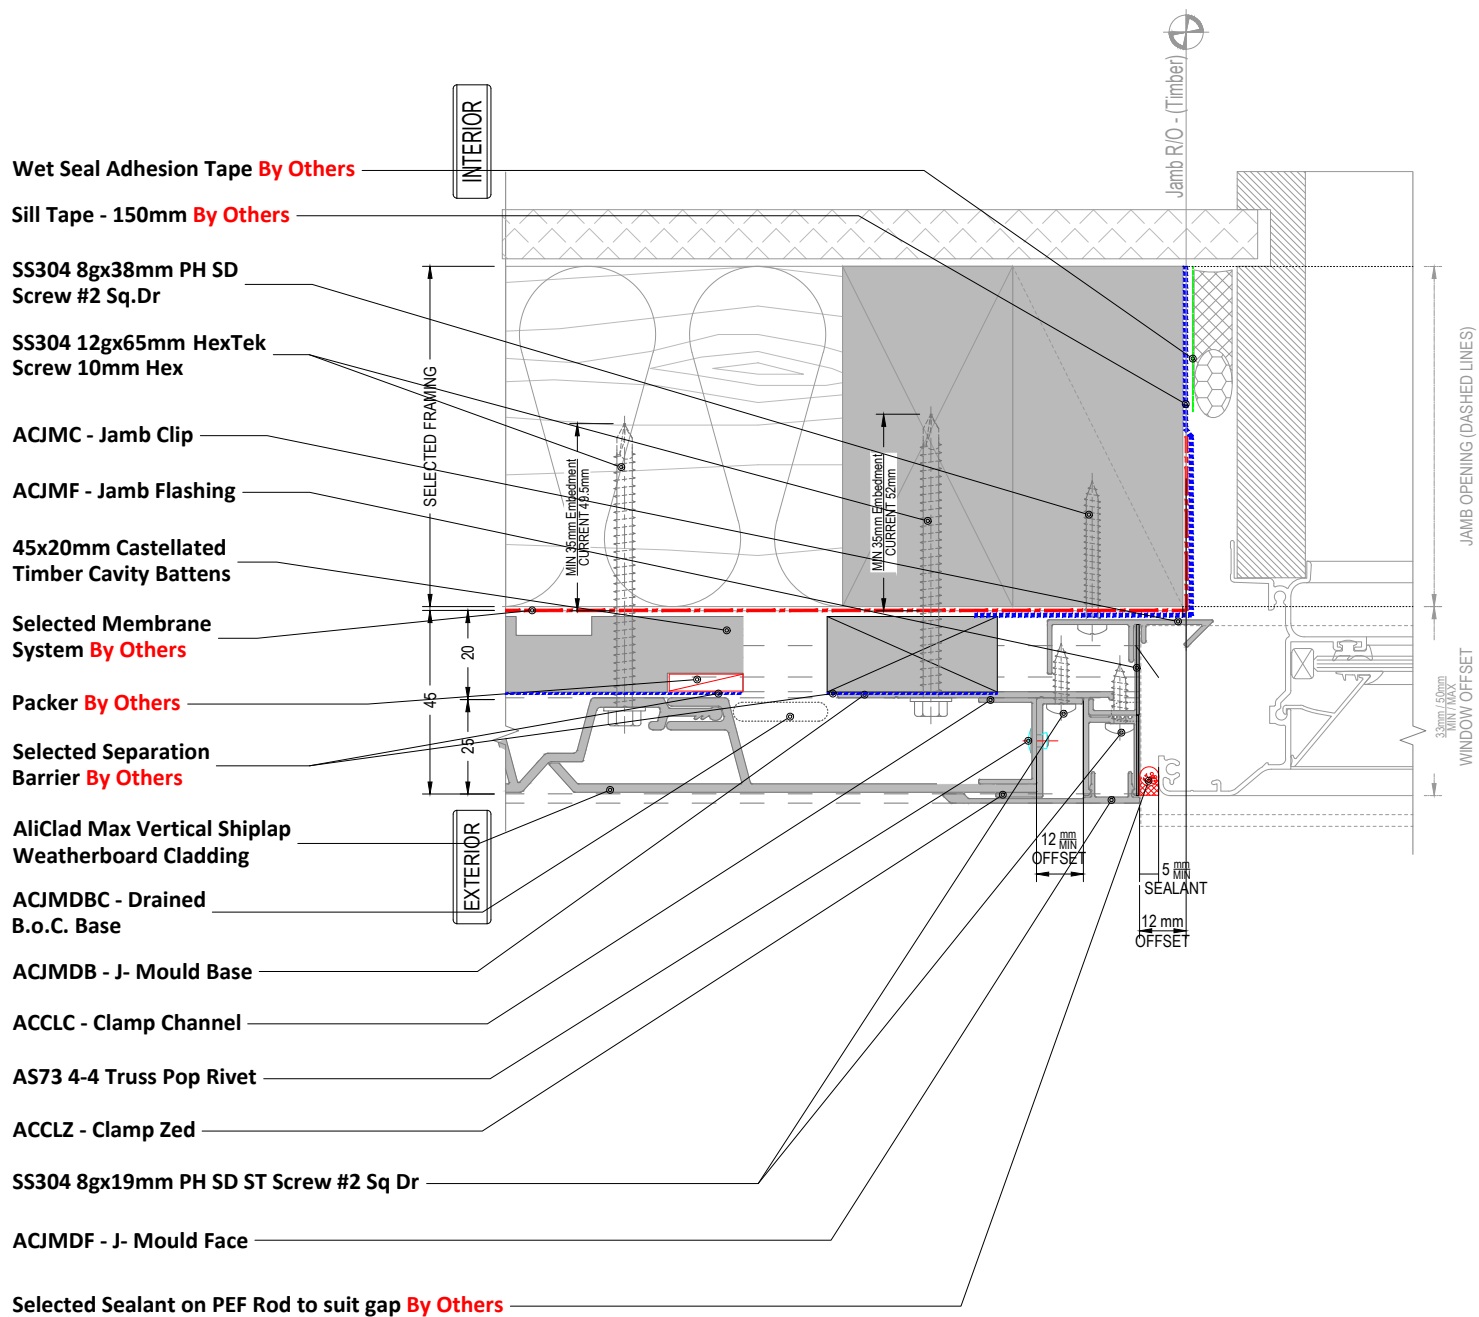

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

Version

Window Jamb_WANZ/Supported


AC-V-TB-7.4

[v2.3]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

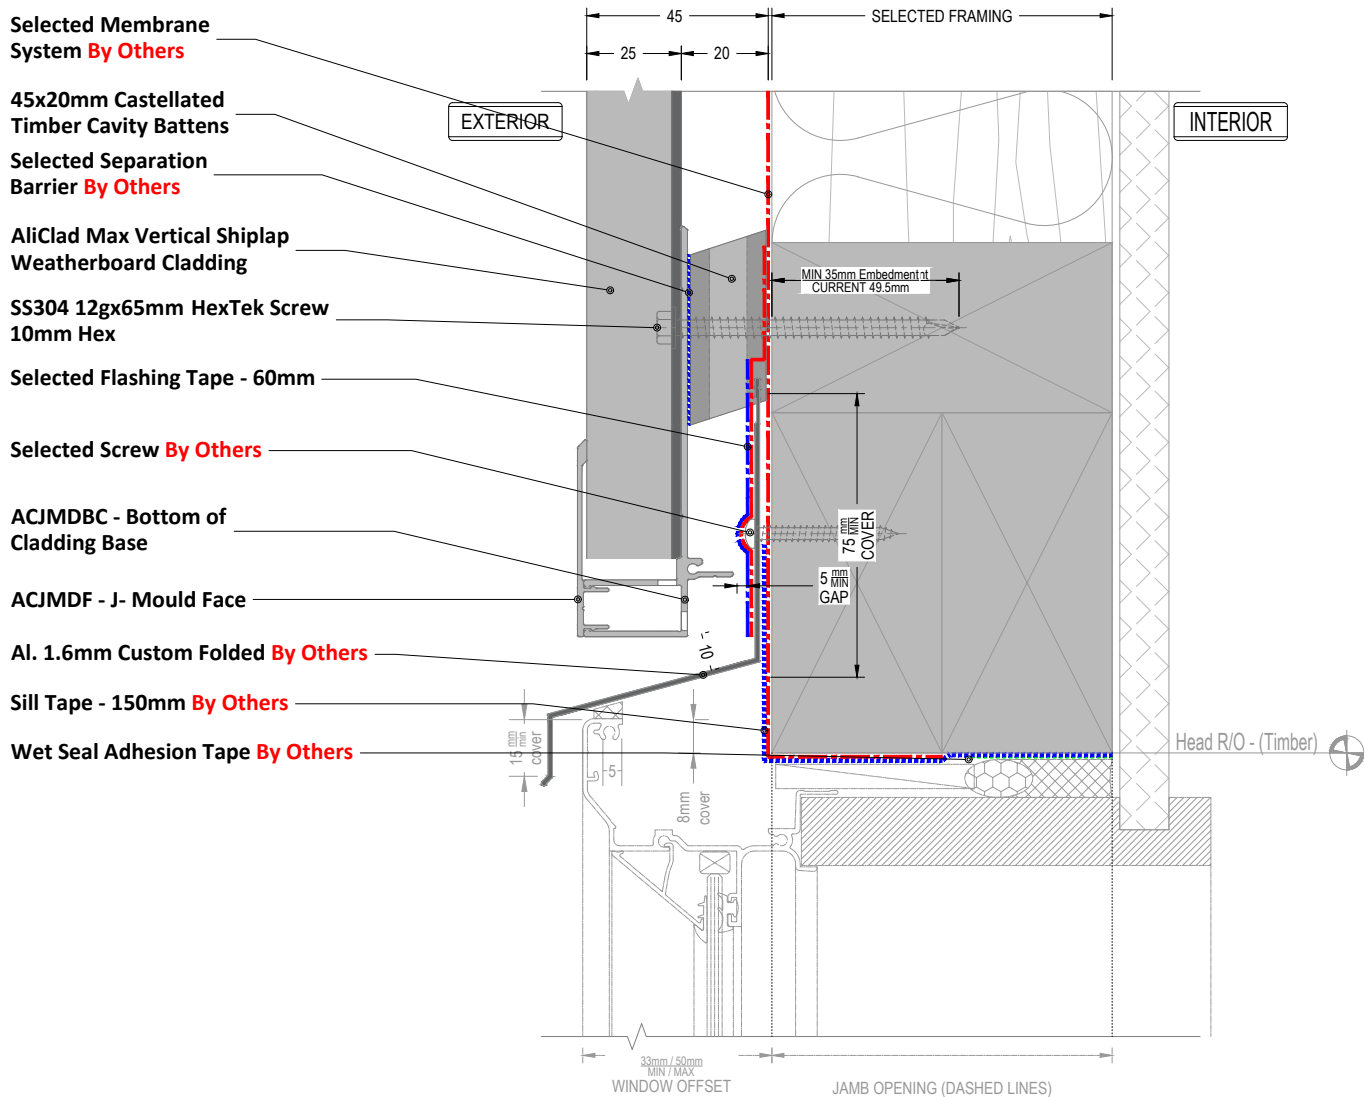

NOTE 1

Refer to drawing "7.4" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-7.5

Version


[v2.3]

Window Head_WANZ/Supported



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

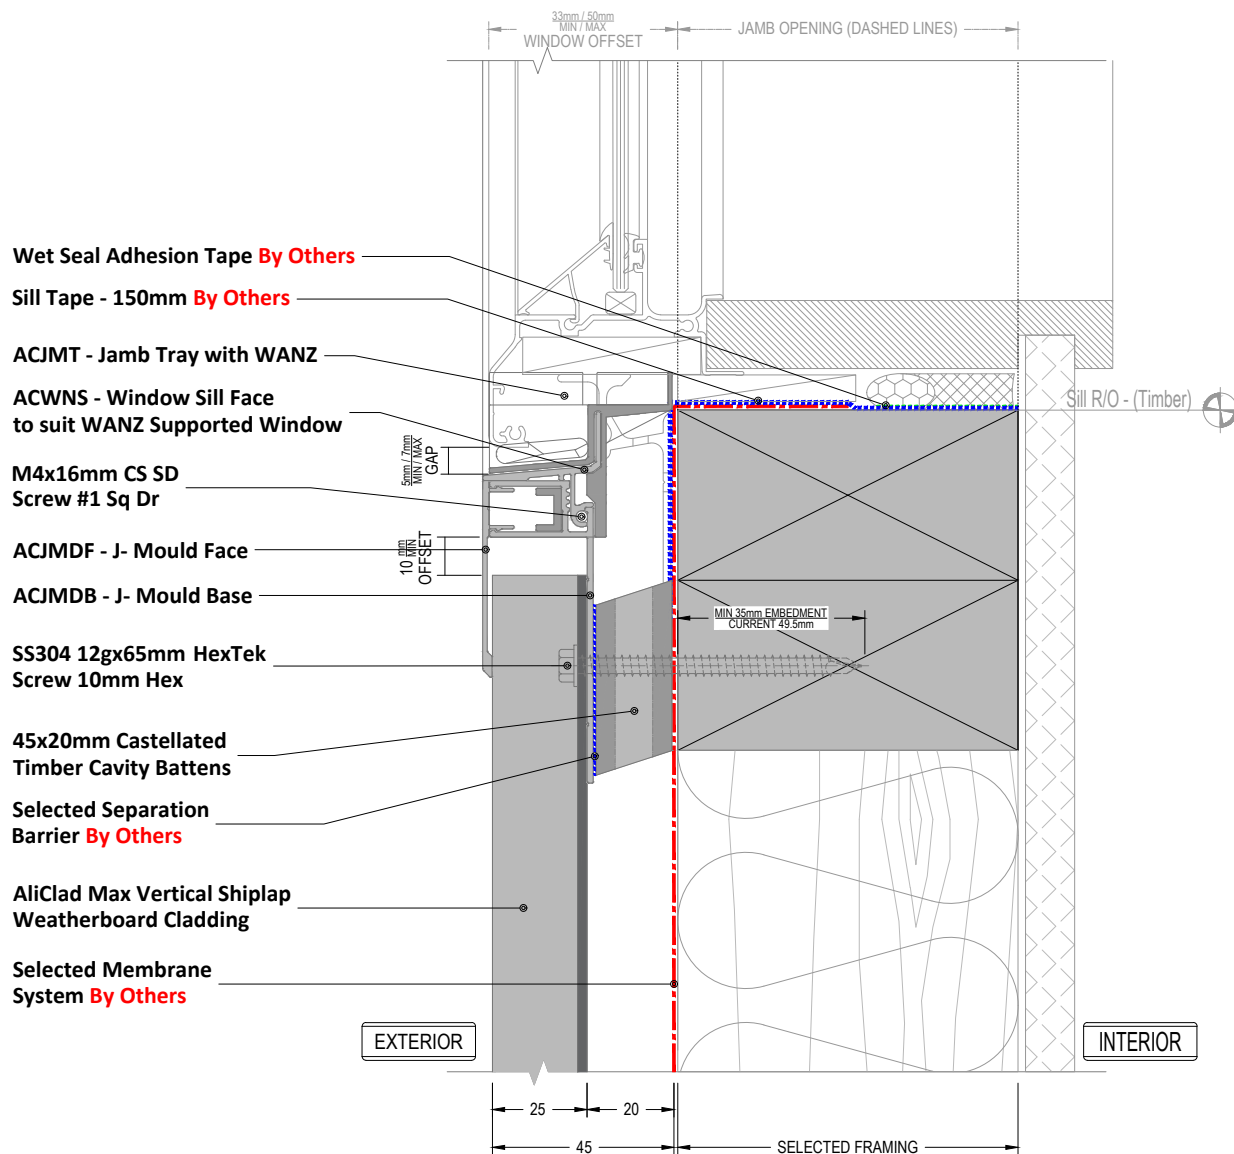

NOTE

Refer to drawing "7.4" for Sill/Jamb Junction

Detail Number

AC-V-TB-7.6

Version


[v2.3]

Window Sill_WANZ/Supported



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

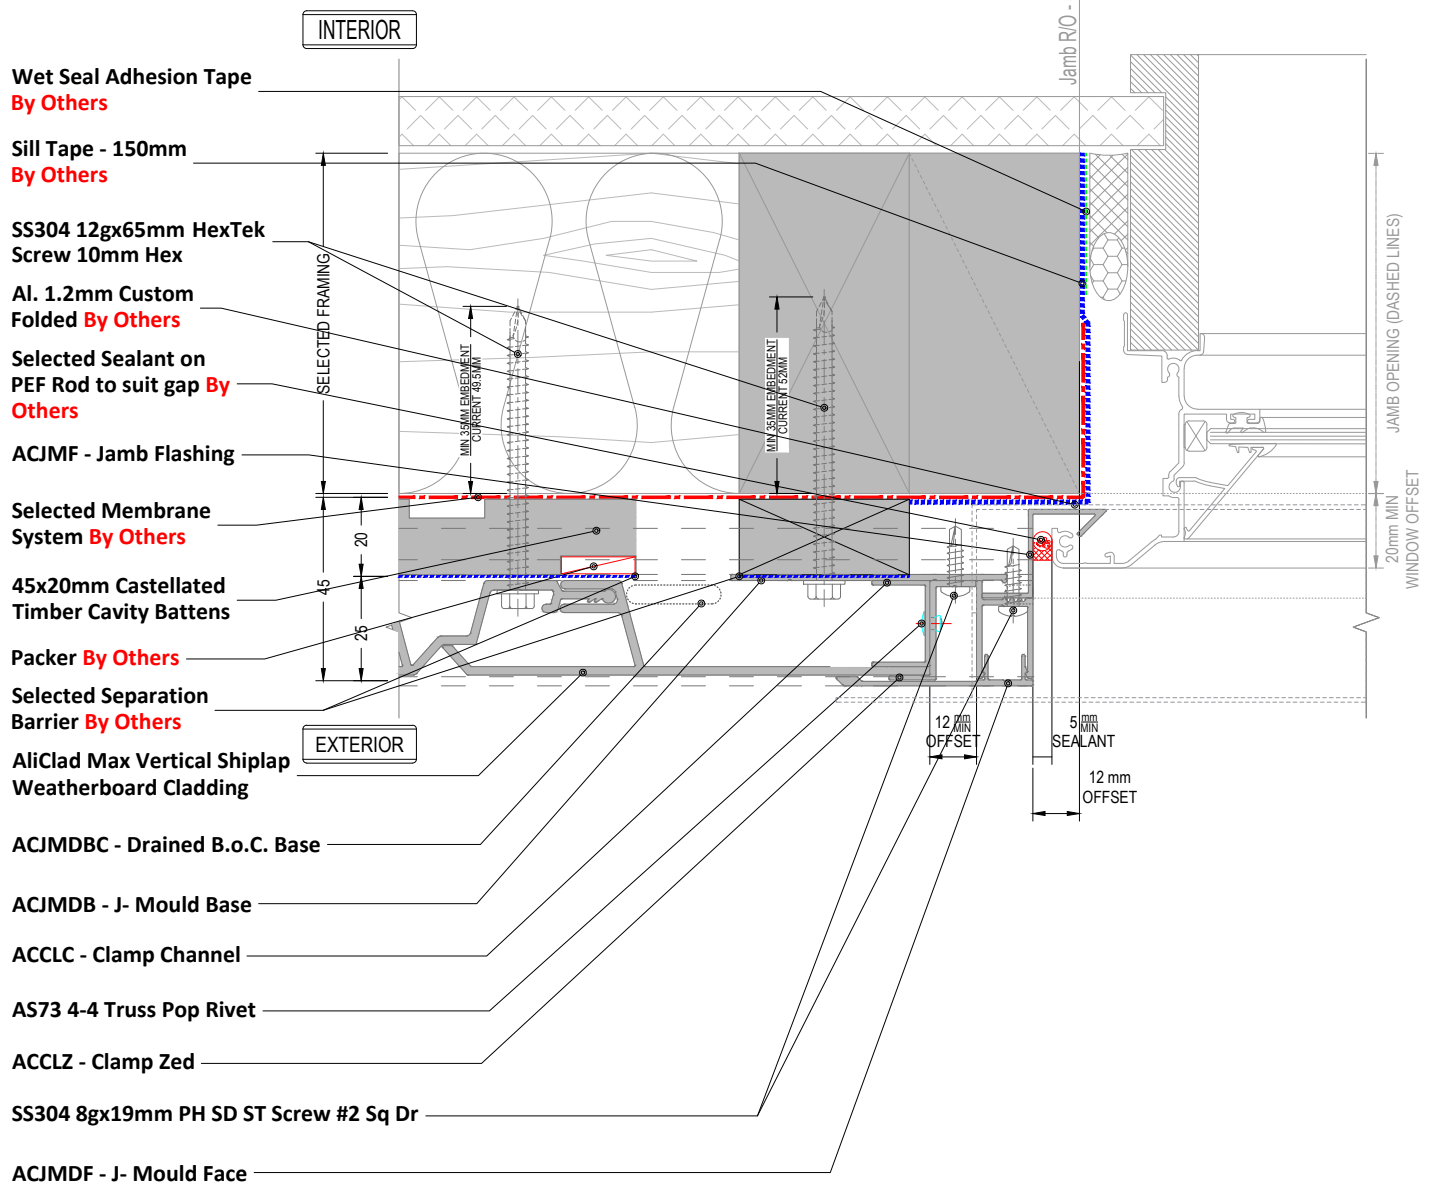

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

AC-V-TB-7.7

Version


[v2.3]

Window Jamb_Recessed

**THE
BUILDING
AGENCY**

MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

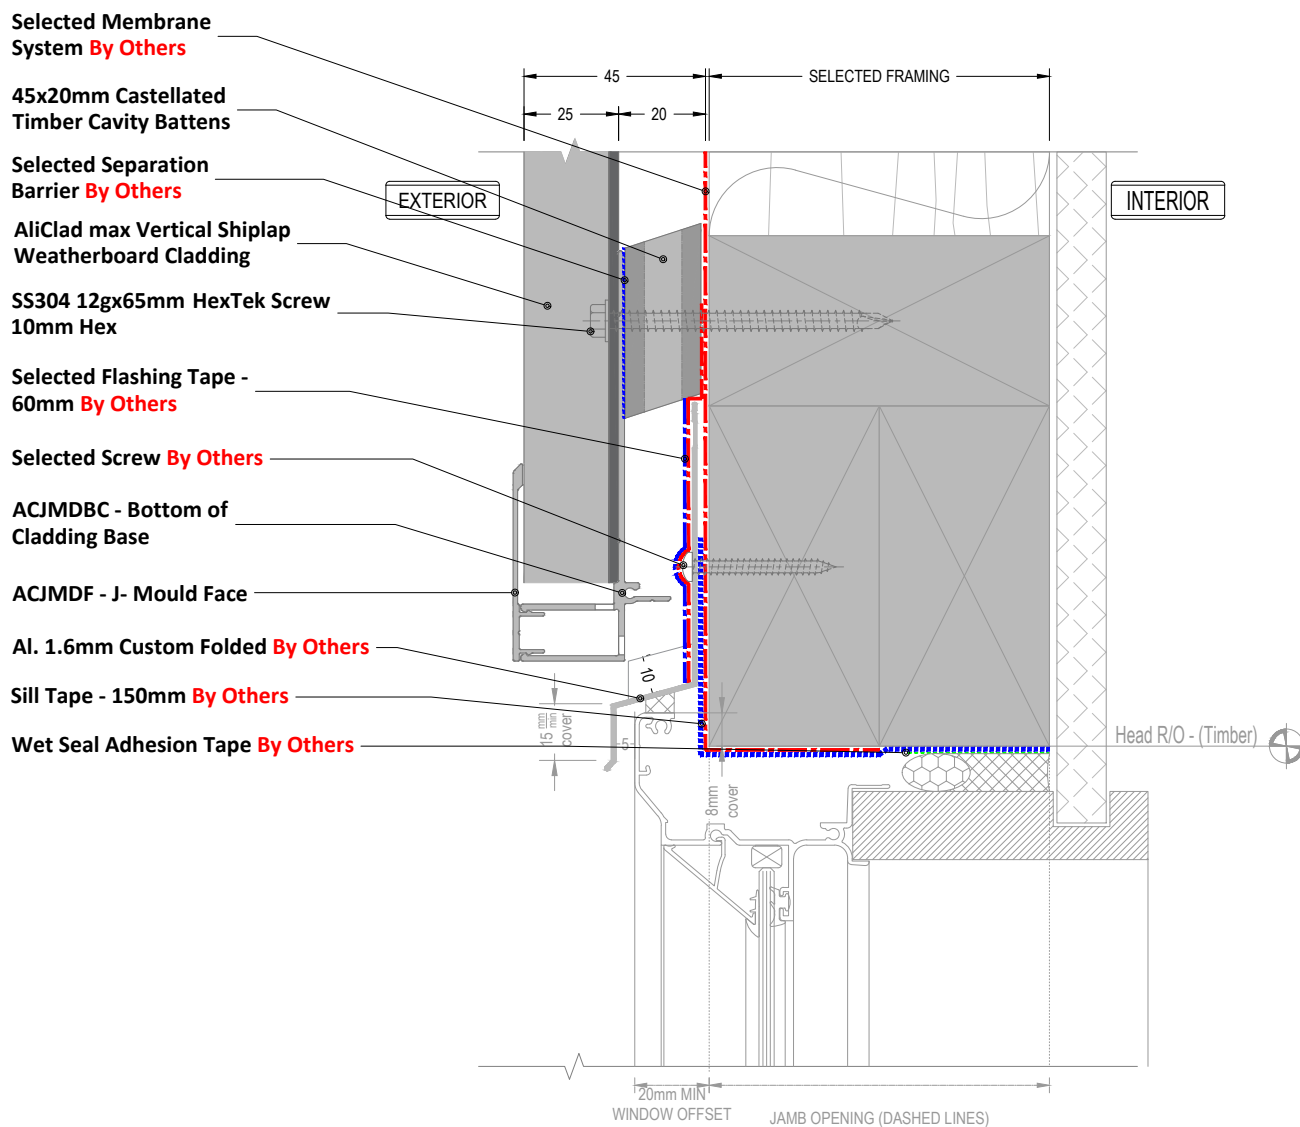

NOTE 1

Refer to drawing "7.7" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-7.8

Version


[v2.3]

Window Head_Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

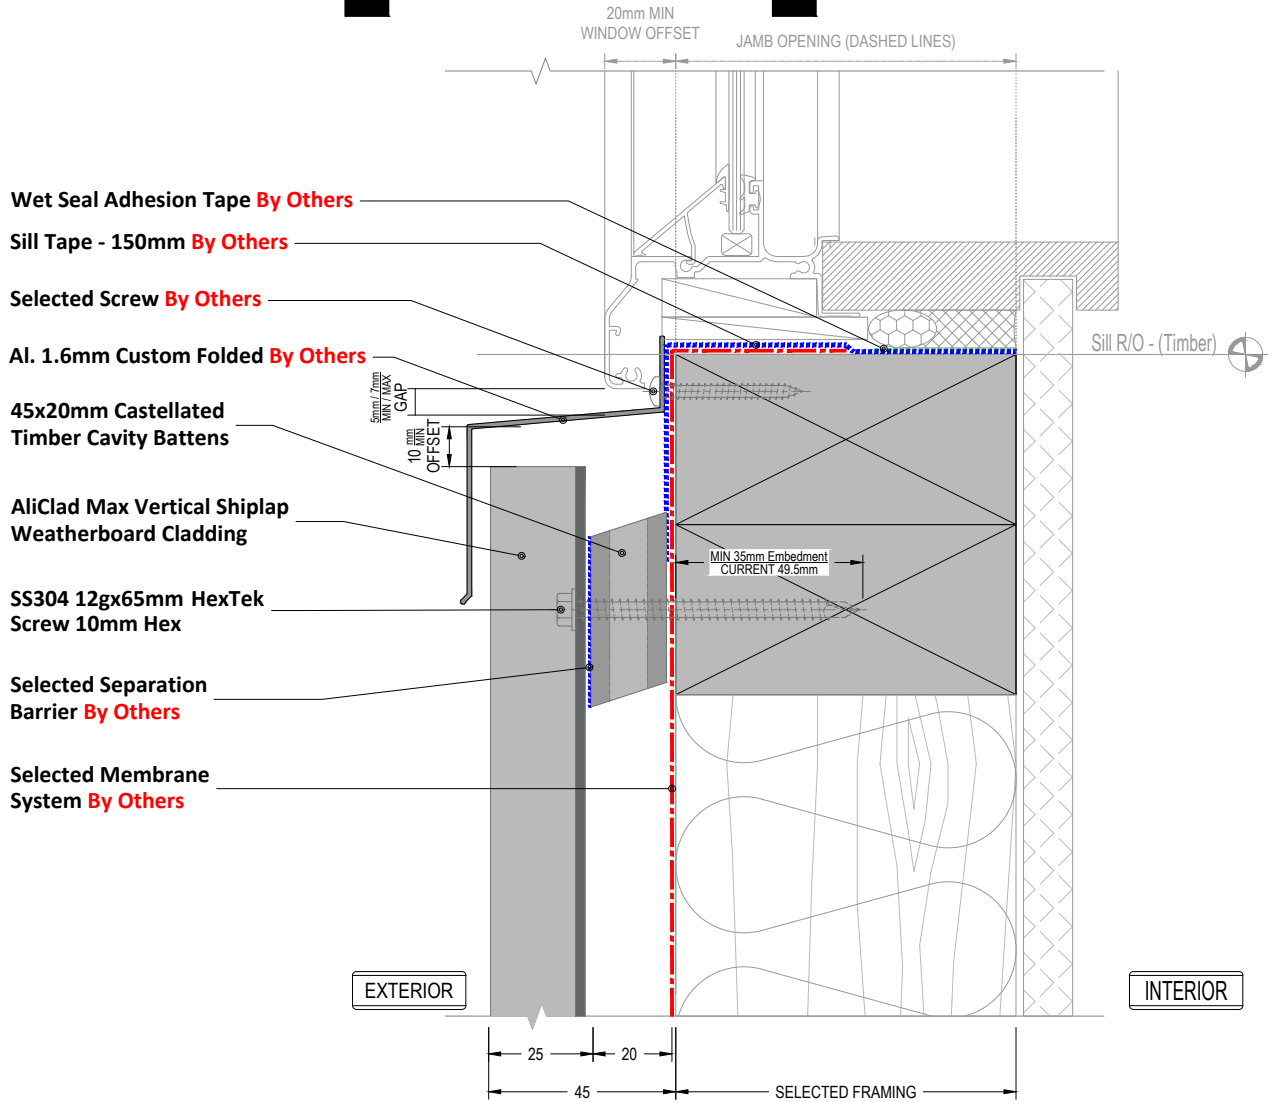

NOTE

Refer to drawing "7.7" for Sill/Jamb Junction

Detail Number

AC-V-TB-7.9

Version


[v2.3]

Window Sill_Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

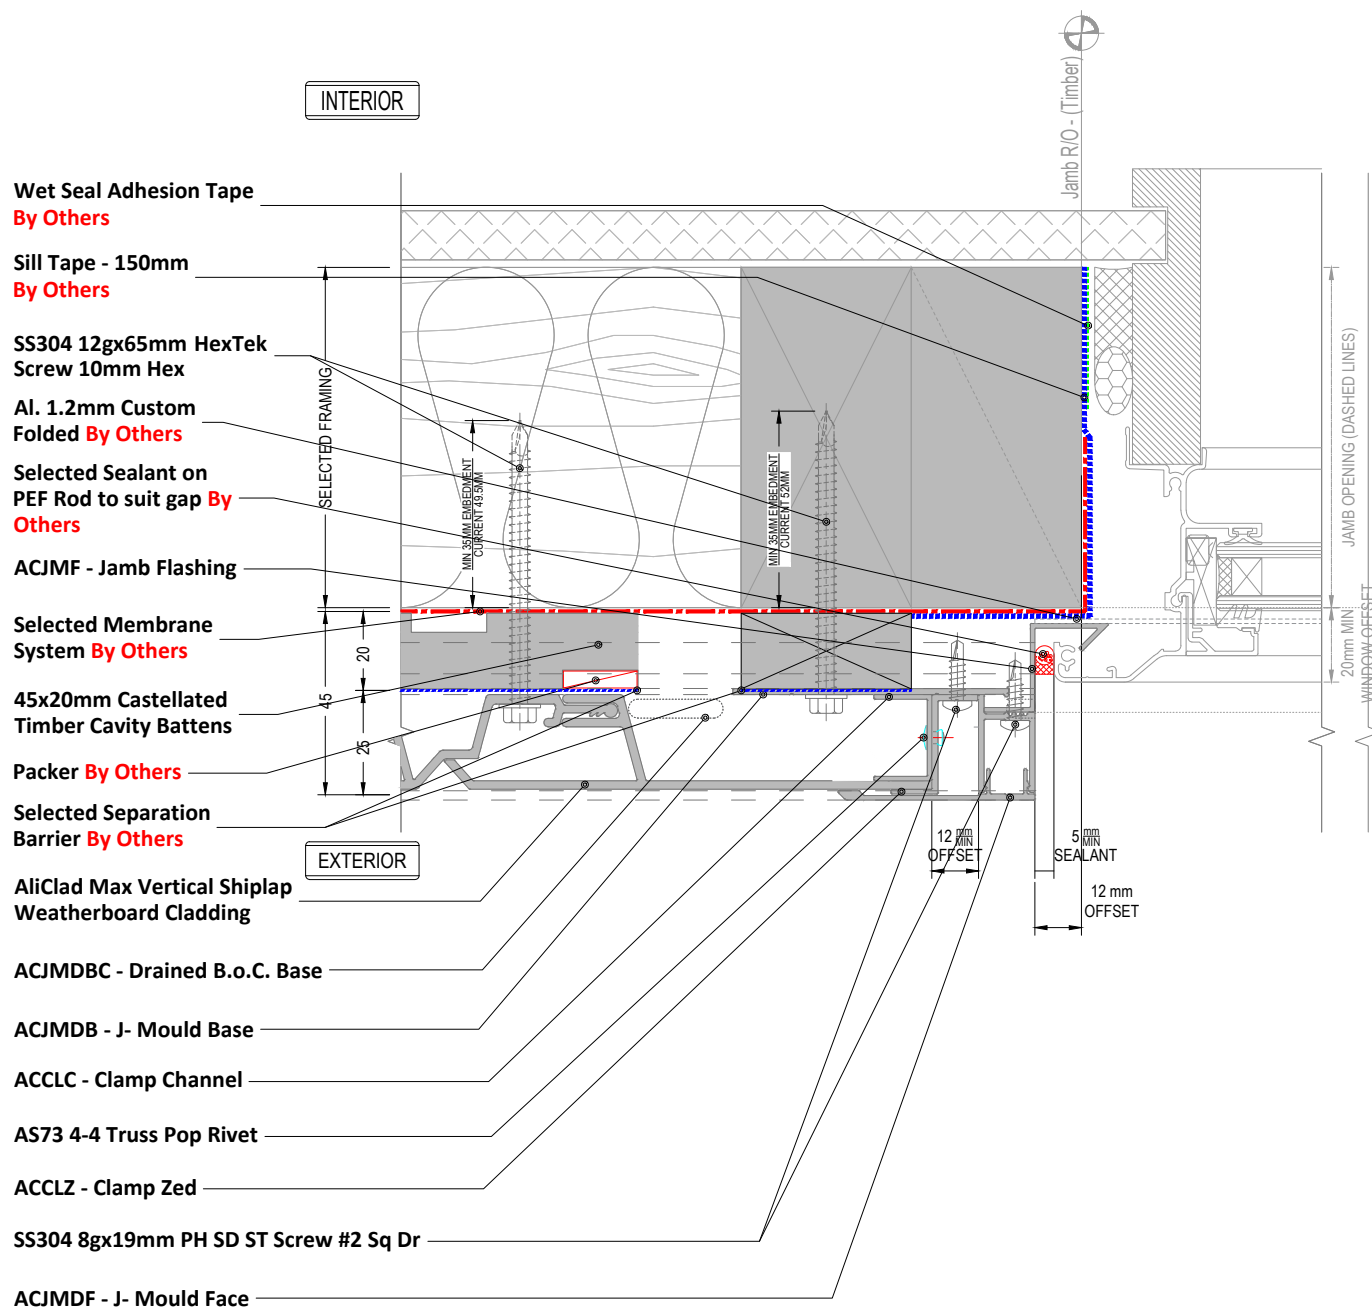

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

AC-V-TB-8.1

Version

[v2.3]

Door Jamb_Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

Selected Membrane System **By Others**

Selected Separation Barrier **By Others**

45x20mm Castellated Timber Cavity Batts

AliClad Max Vertical Shiplap Weatherboard Cladding

SS304 12gx65mm HexTek Screw 10mm Hex

Selected Flashing Tape - 60mm **By Others**

Selected Screw **By Others**

ACJMDBC - Bottom of Cladding Base

ACJMDF - J- Mould Face

Al. 1.6mm Custom Folded **By Others**


Sill Tape - 150mm **By Others**

Wet Seal Adhesion Tape **By Others**

Sill Tape - 150mm **By Others**

Al. 1.2mm Custom Folded **By Others**

Selected Membrane System **By Others**

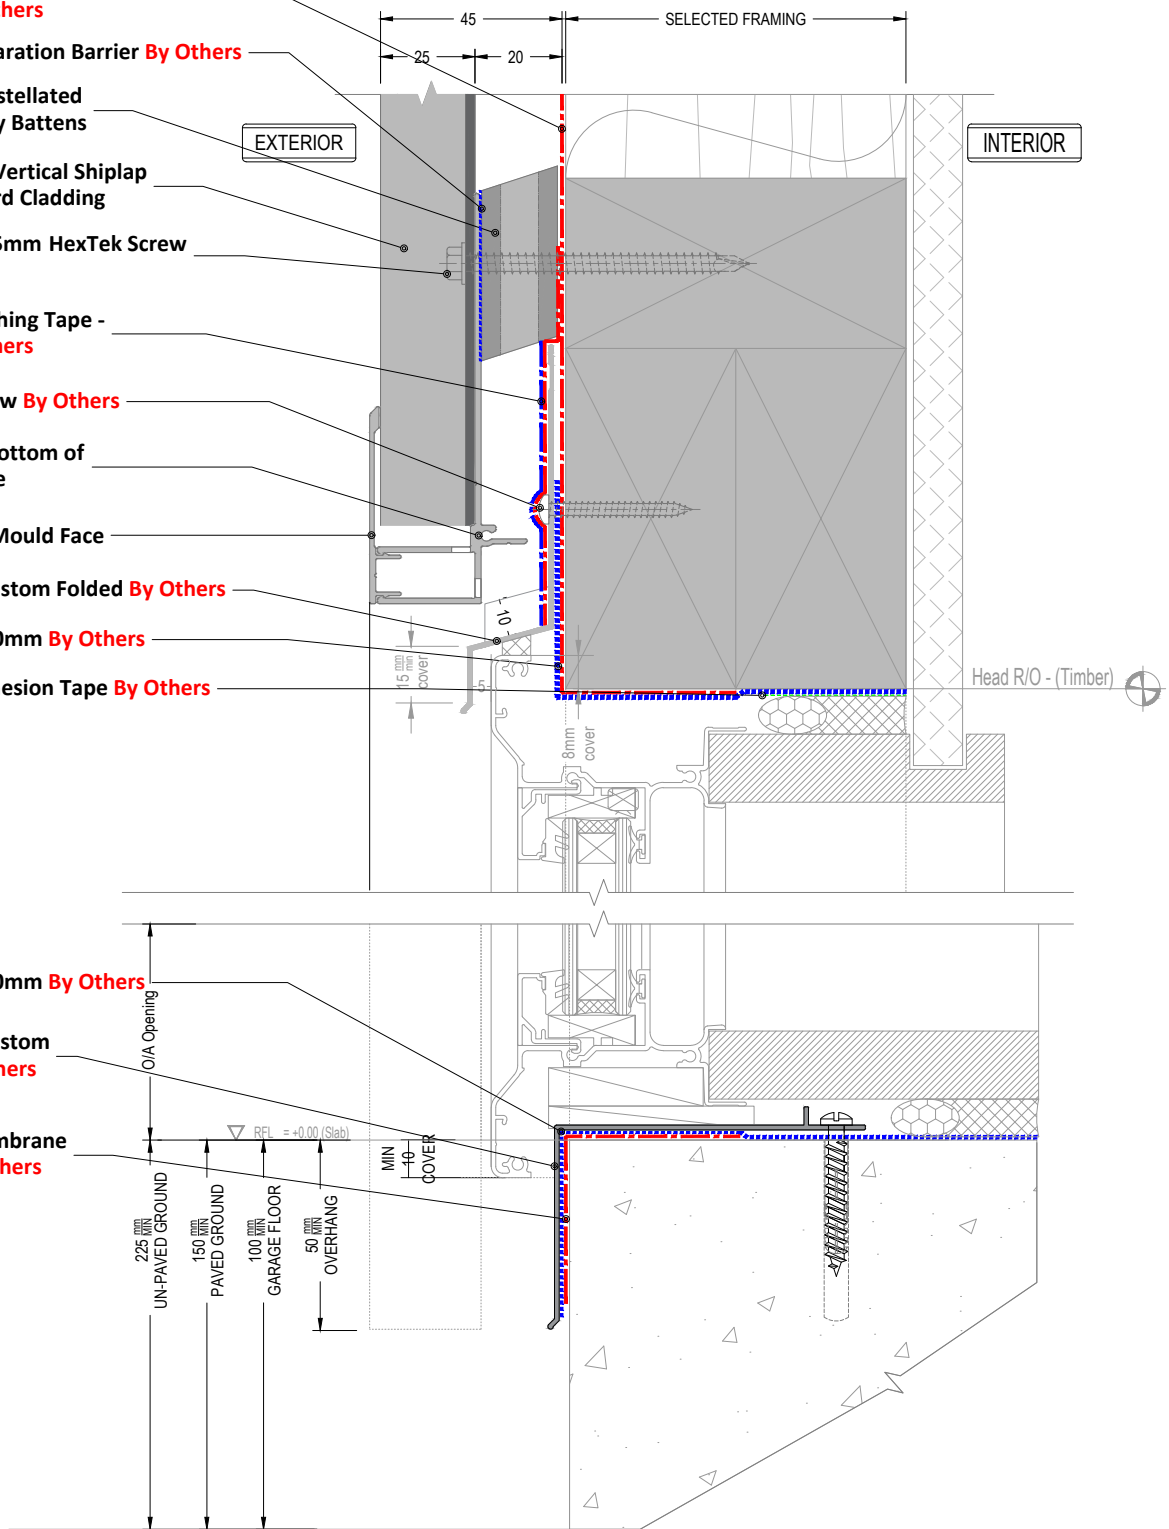

NOTE 1

Refer to drawing "8.1" for Sill/Jamb Junction

NOTE 2

Flashings and Angles are not included in the system

Detail Number

AC-V-TB-8.2

Version


[v2.3]

Door Head & Sill Recessed



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

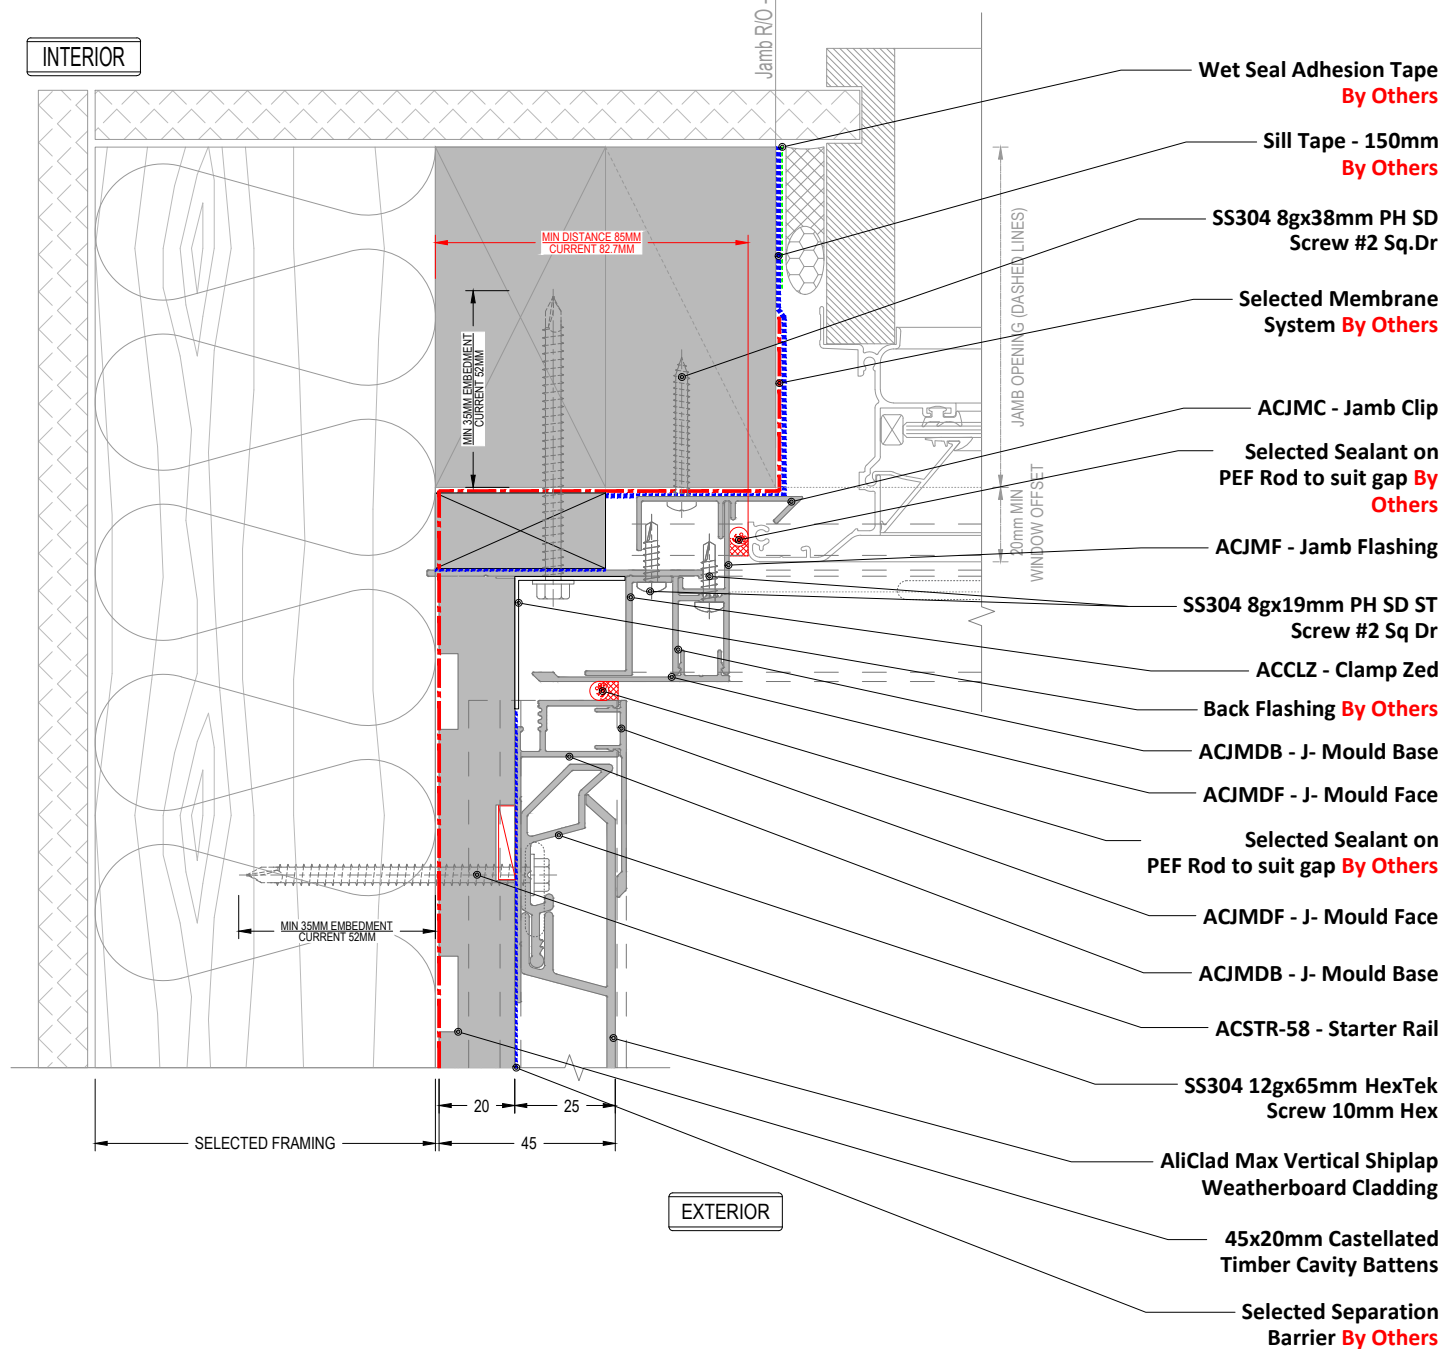

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

AC-V-TB-8.4

Version


[v2.3]

Window Jamb_Corner



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

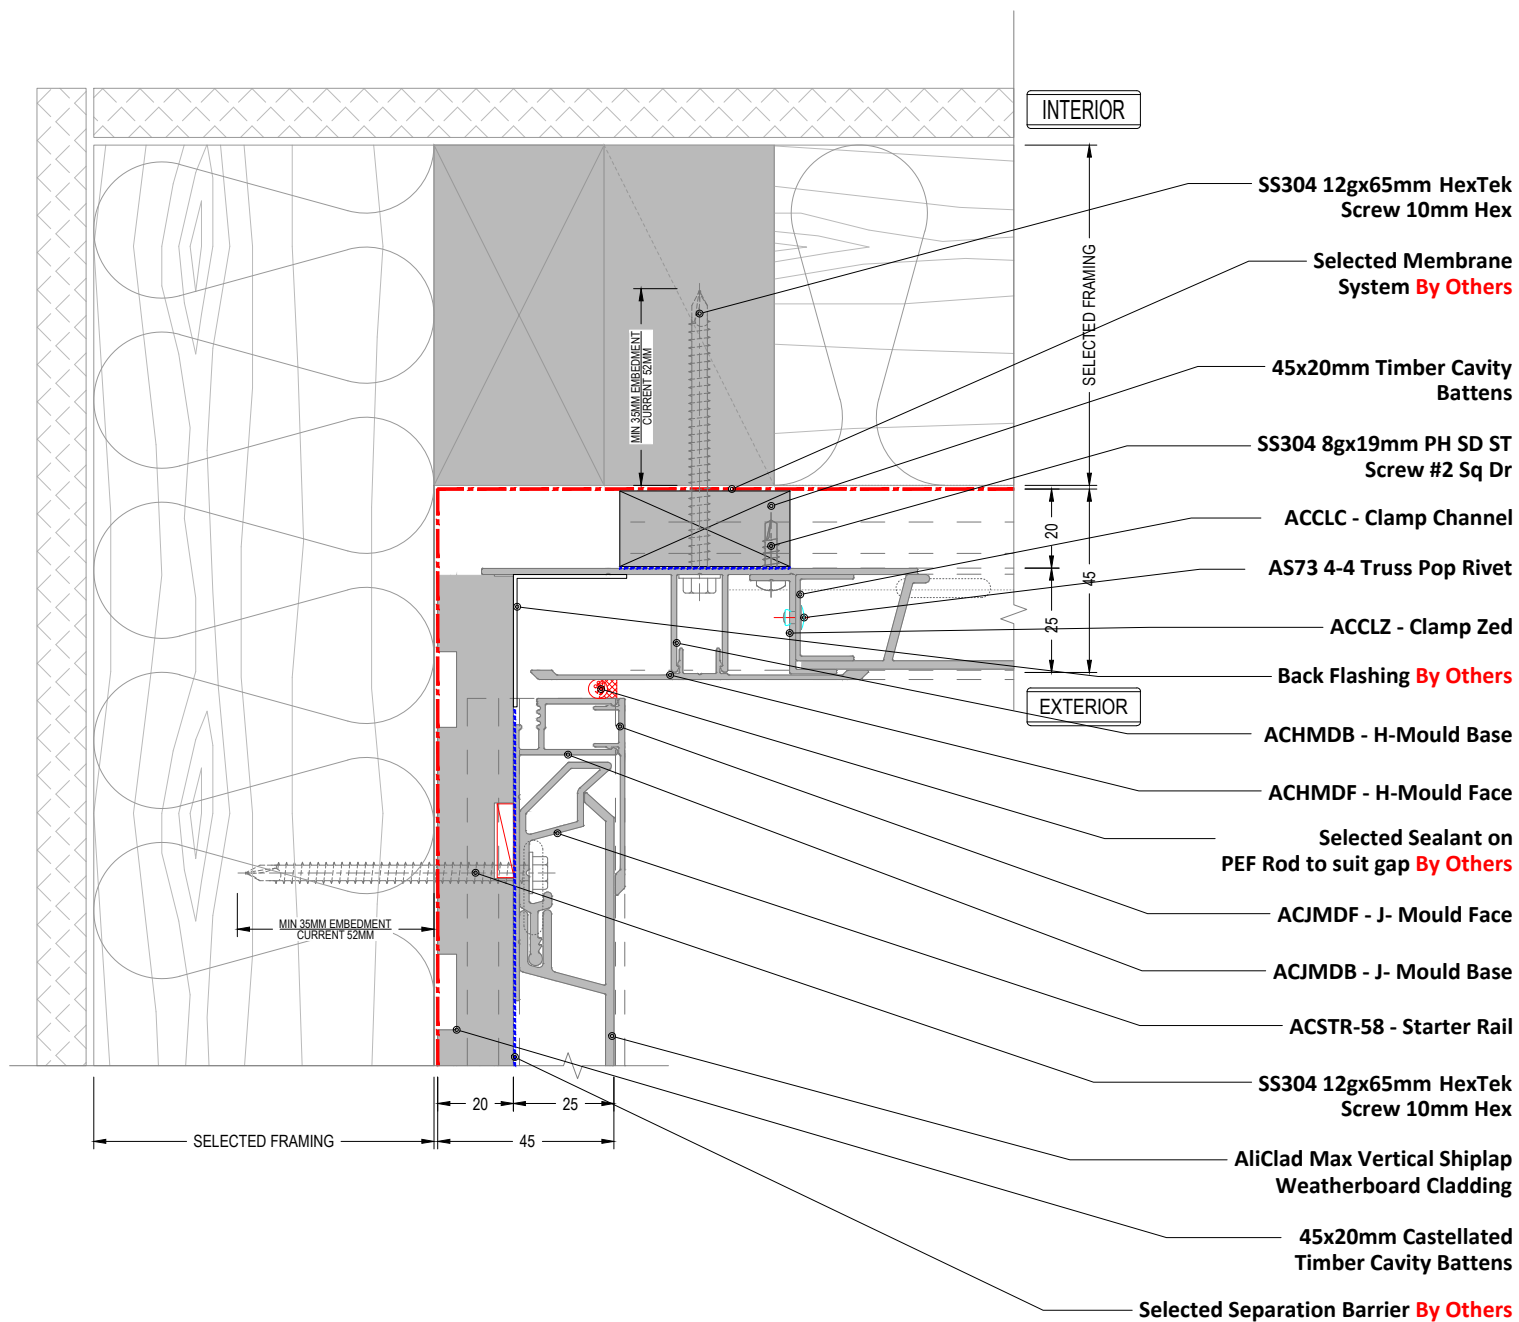

NOTE

ACJMDBC - Drained B.O.C. Base Shown in dashed lines

Detail Number

Window Jamb_Corner Above & Under Window

AC-V-TB-8.5


Version

[v2.3]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

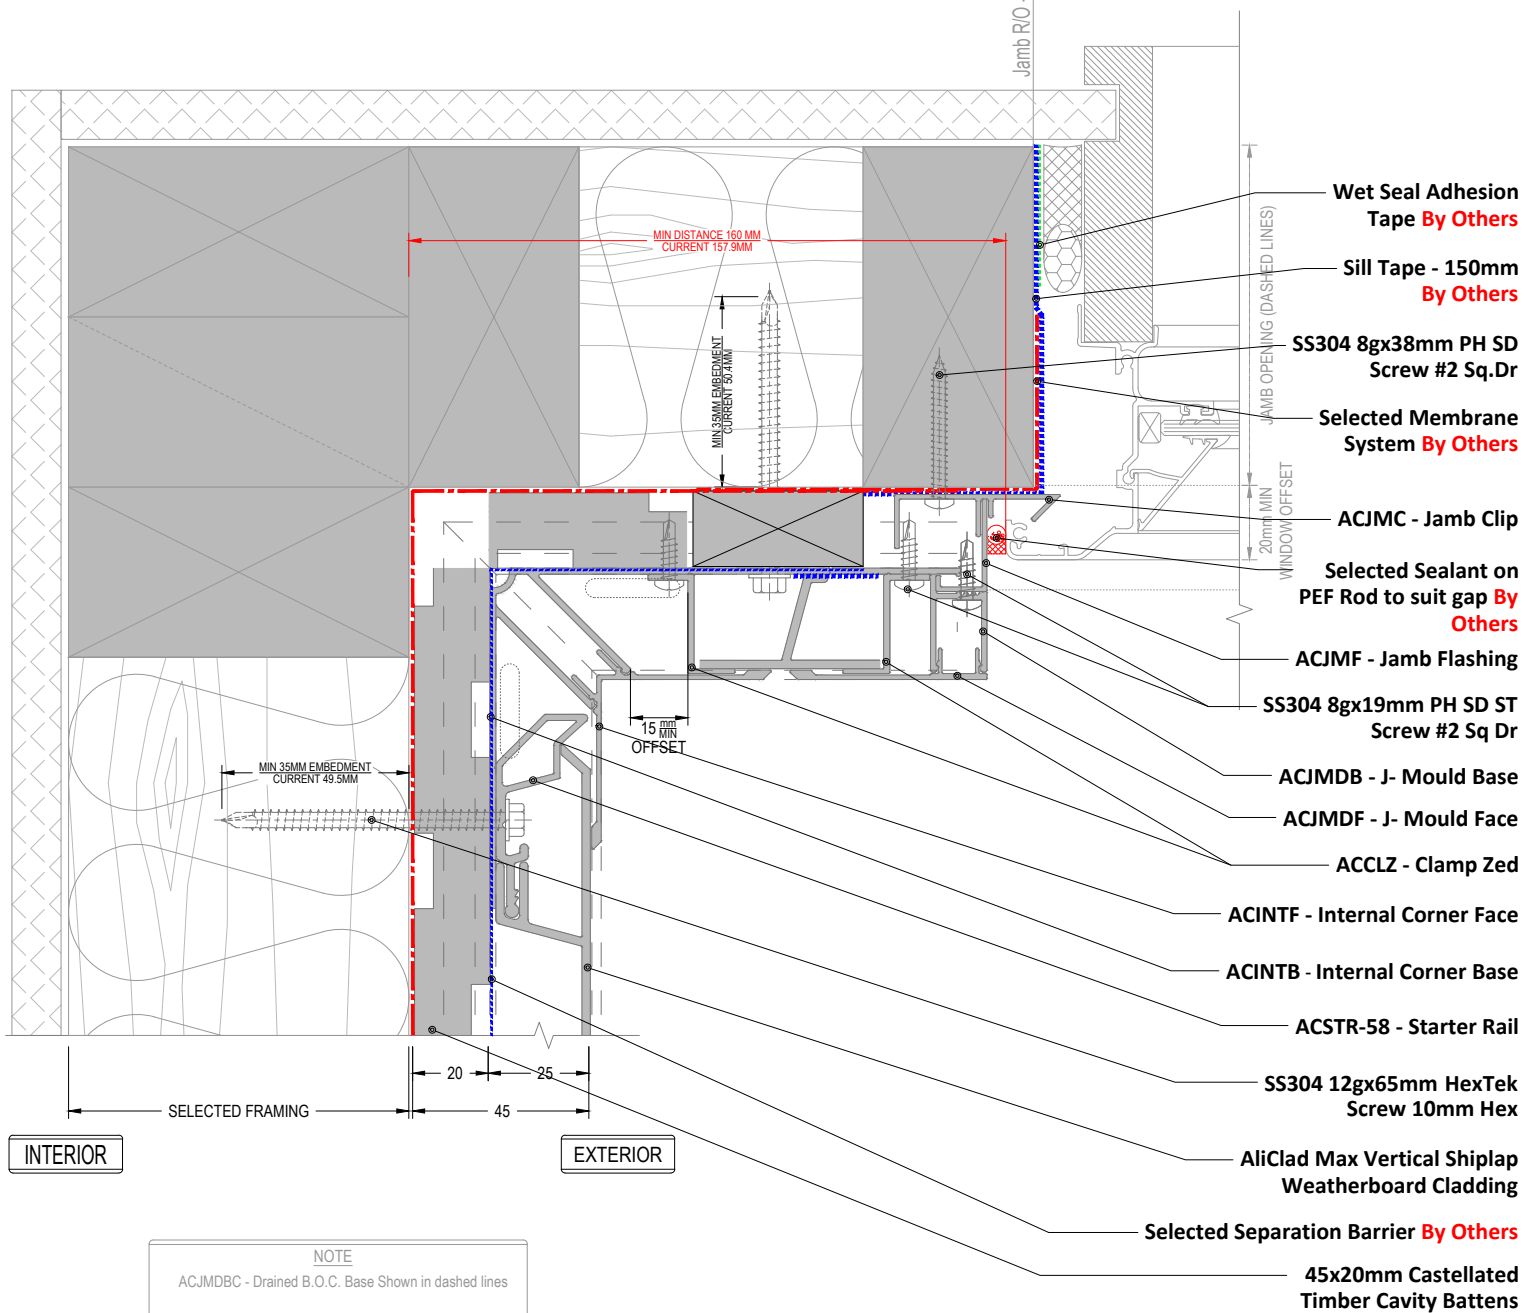

Detail Number

AC-V-TB-8.6

Version


[v2.3]

Internal Corner to Window Jamb



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

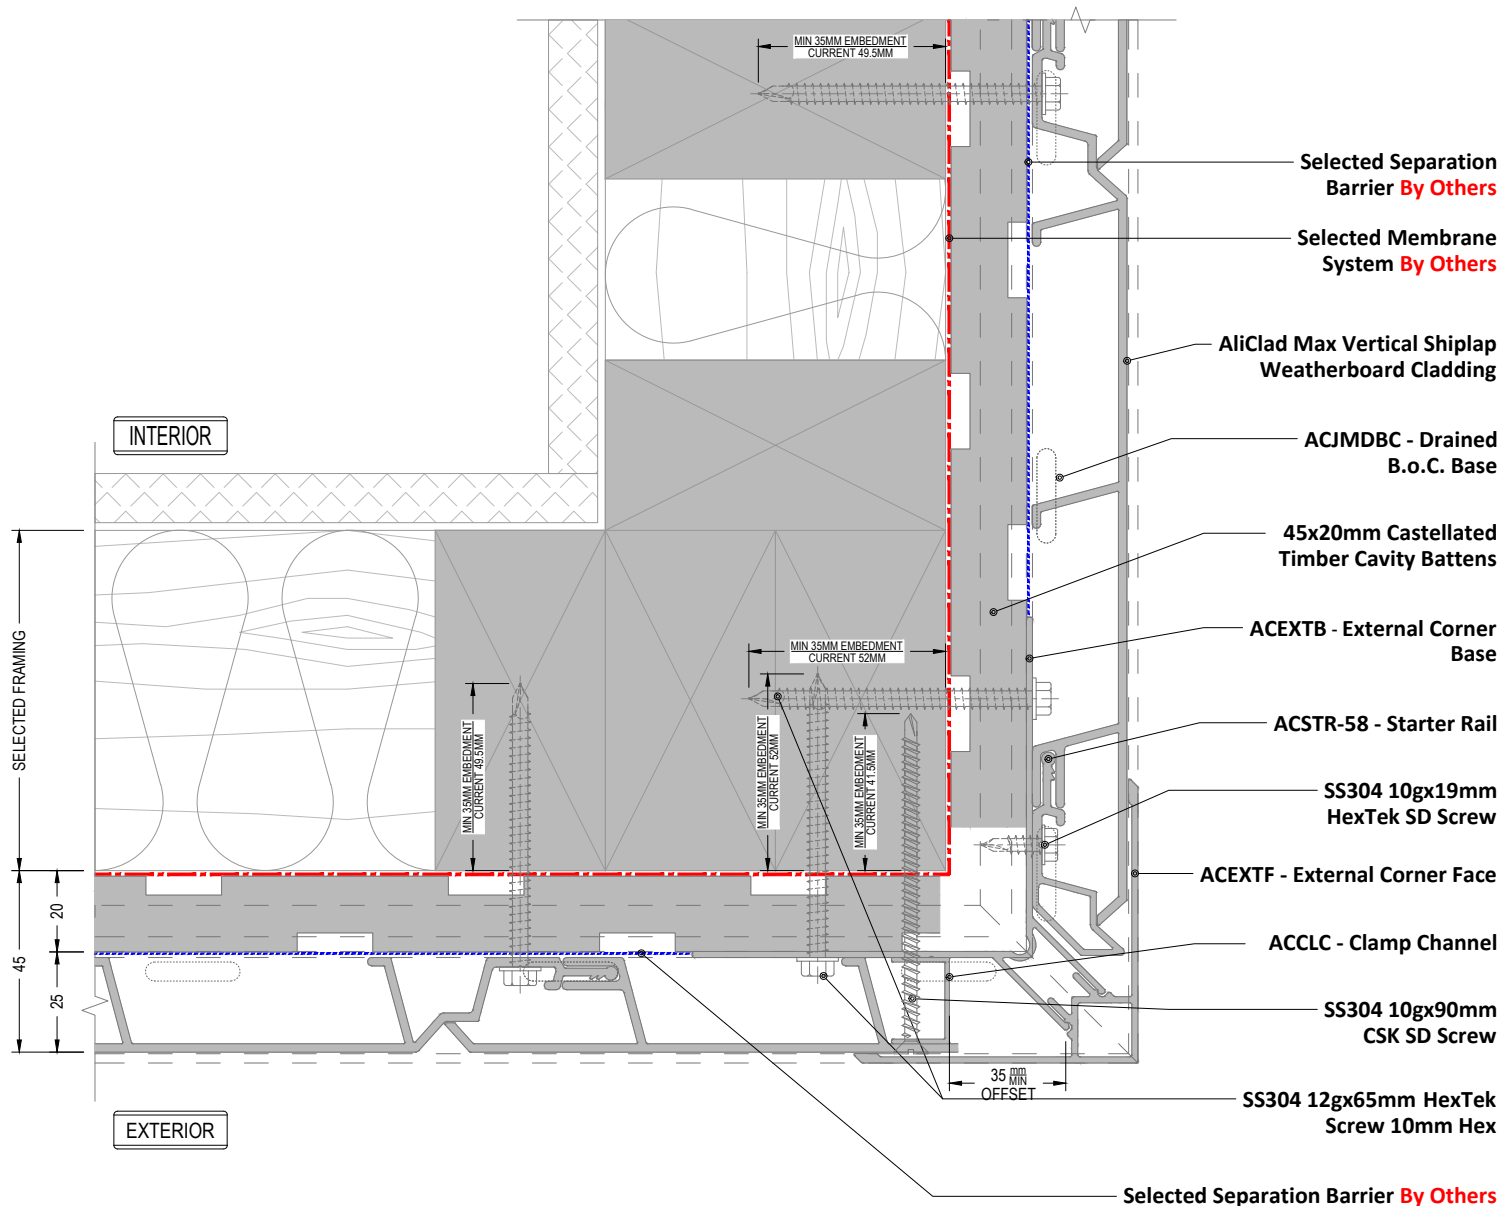

External Corner OP. 2

Detail Number

AC-V-TB-1.1


Version

[v2.4]



MATERIALS • SYSTEMS • SOLUTIONS

ALICLAD MAX

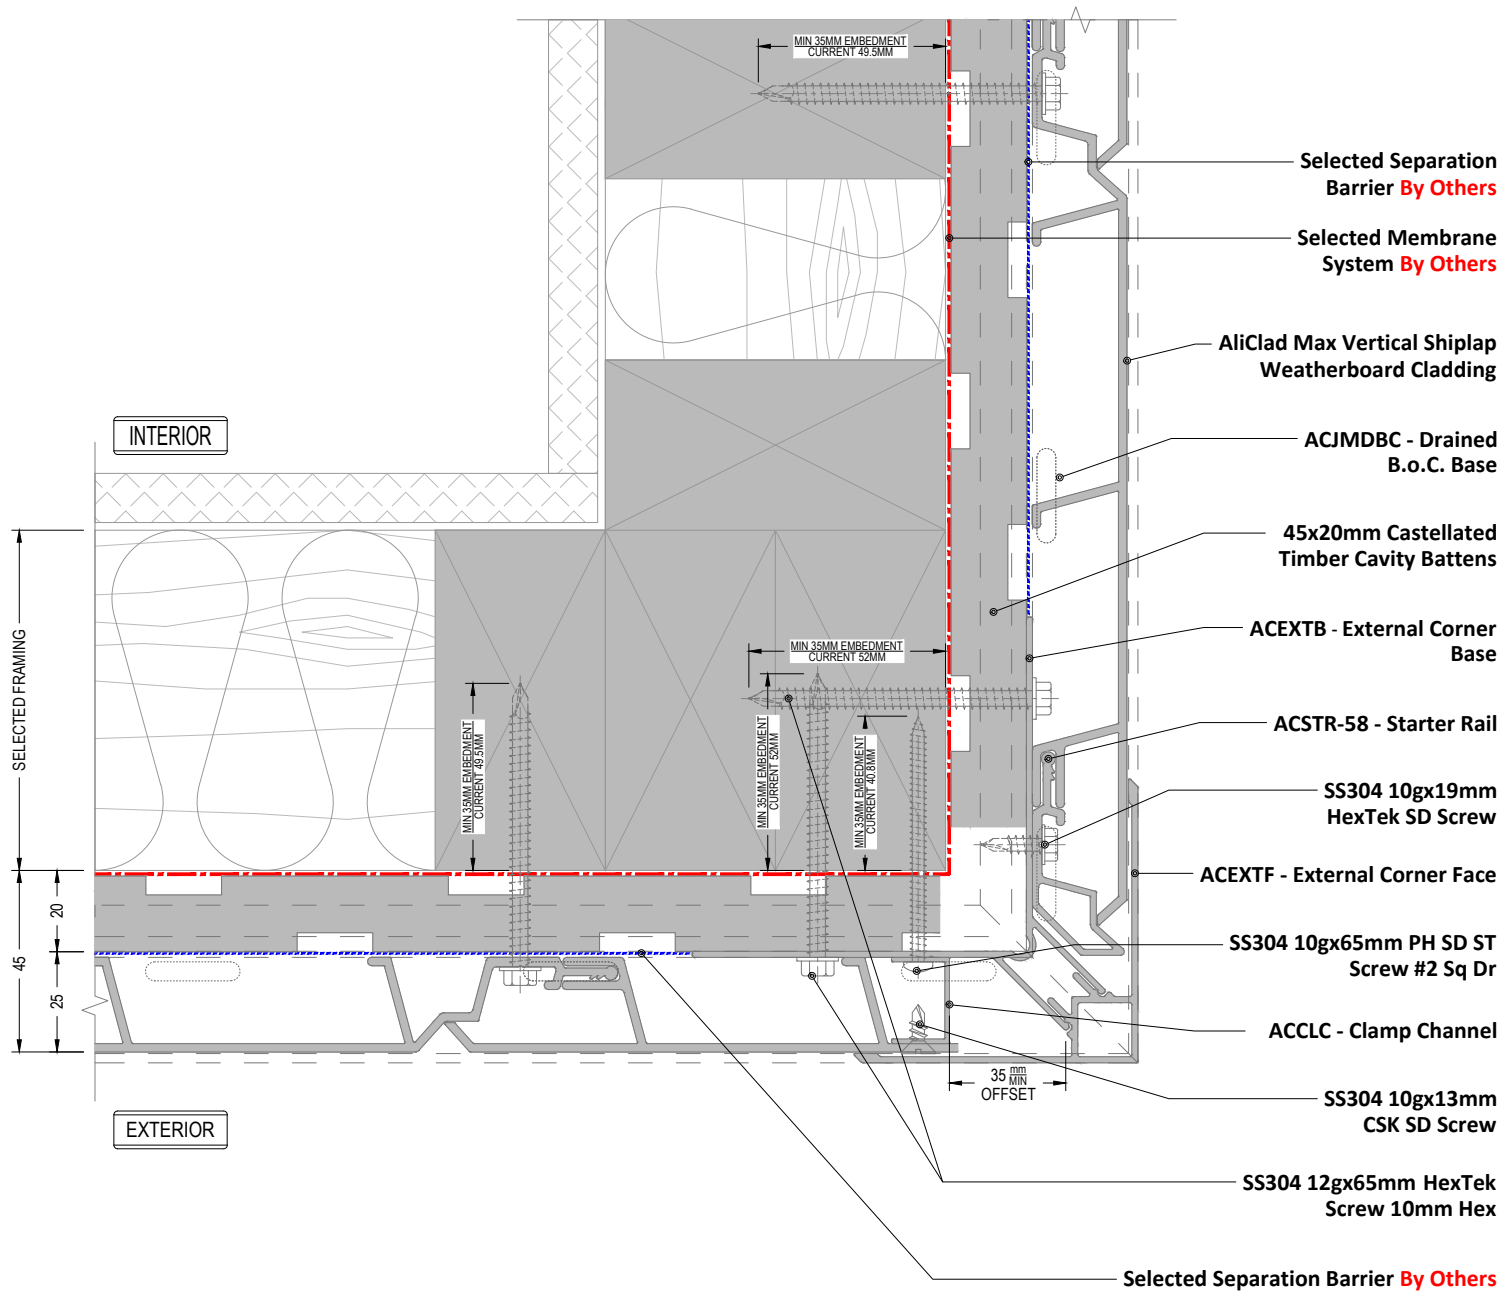

External Corner OP. 3

Detail Number

AC-V-TB-1.1

Version

[v2.4]



MATERIALS • SYSTEMS • SOLUTIONS